

### MODEL 161S/161S-LF BRONZE DISC SWING CHECK



#### FEATURES

- Y-Pattern
- Solder Ends
- Bronze Seat
- 200 CWP
- Lead Free Option (NSF/ANSI/CAN 372)

#### STANDARDS

- MSS SP-80 Standard
- MSS SP-139 Lead Free Option (CWP only)
- ASTM B62 Bronze (ASTM B584-C89836 Lead Free)

#### APPROVALS

- CRN 0C14667



PART NUMBER	LF PART NUMBER	NPS	LENGTH (IN.)	HEIGHT (IN.)	WEIGHT (LB.)
61Y-093-01	61YLF-093-01	1/2	2.53	1.65	0.62
61Y-094-01	61YLF-094-01	3/4	3.36	1.90	0.91
61Y-095-01	61YLF-095-01	1	4.07	2.26	1.70
61Y-096-01	61YLF-096-01	1-1/4	4.68	2.65	2.00
61Y-097-01	61YLF-097-01	1-1/2	5.28	2.99	2.70
61Y-098-01	61YLF-098-01	2	6.50	3.74	4.90
61Y-099-01	-	2-1/2	8.30	5.11	9.70

Height is measured from centerline to top of unit.

### MODEL 161T/161T-LF CLASS 125 BRONZE DISC SWING CHECK



#### FEATURES


- Y-Pattern
- NPT
- Bronze Seat
- 200 CWP
- 125 SWP
- Lead Free Option (NSF/ANSI/CAN 372)

#### STANDARDS

- MSS SP-80 Standard
- MSS SP-139 Lead Free Option (CWP only)
- ASTM B62 Bronze (ASTM B584-C89836 Lead Free)

#### APPROVALS

- CRN 0C14667

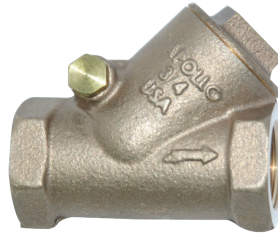

PART NUMBER	LF PART NUMBER	NPS	LENGTH (IN.)	HEIGHT (IN.)	WEIGHT (LB.)
61Y-192-01	-	3/8	2.14	1.51	0.62
61Y-193-01	61YLF-193-01	1/2	2.48	1.65	0.73
61Y-194-01	61YLF-194-01	3/4	2.94	1.90	1.06
61Y-195-01	61YLF-195-01	1	3.57	2.26	1.70
61Y-196-01	61YLF-196-01	1-1/4	4.50	2.99	3.30
61Y-197-01	61YLF-197-01	1-1/2	4.50	2.99	3.10
61Y-198-01	61YLF-198-01	2	5.25	3.74	5.50
61Y-199-01	-	2-1/2	8.00	5.11	11.70
61Y-190-01	-	3	9.24	6.05	17.80

Height is measured from centerline to top of unit.

### MODEL 162T VITON® DISC SWING CHECK

#### FEATURES


- Y-Pattern
- NPT
- Viton Elastomer Seat
- 200 CWP
- 125 SWP

#### STANDARDS

- MSS SP-80 Standard
- ASTM B62 Bronze

#### APPROVALS

- CRN 0C14667

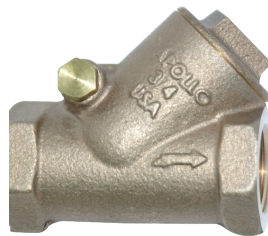

PART NUMBER	NPS	LENGTH (IN.)	HEIGHT (IN.)	WEIGHT (LB.)
61Y-202-V1	3/8	2.14	1.51	0.62
61Y-203-V1	1/2	2.48	1.65	0.73
61Y-204-V1	3/4	2.94	1.90	1.06
61Y-205-V1	1	3.57	2.26	1.70

Height is measured from centerline to top of unit.

### MODEL 163S/163S-LF 200 CWP PTFE DISC SWING CHECK



#### FEATURES

- Y-Pattern
- Solder
- PTFE Soft Seat
- 200 CWP
- Lead Free (NSF/ANSI/CAN 372)

#### STANDARDS

- MSS SP-80 Standard
- MSS SP-139 Lead Free Option (CWP only)
- ASTM B584-C89836 Lead Free

#### APPROVALS

- CRN 0C14667



LF PART NUMBER	NPS	LENGTH (IN.)	HEIGHT (IN.)	WEIGHT (LB.)
61YLF-103-T1	1/2	2.53	1.65	0.62
61YLF-104-T1	3/4	3.36	1.90	0.91
61YLF-105-T1	1	4.07	2.26	1.70
61YLF-106-T1	1-1/4	5.28	2.99	3.20
61YLF-107-T1	1-1/2	5.28	2.99	2.70
61YLF-108-T1	2	6.50	3.74	4.90

Height is measured from centerline to top of unit.

### MODEL 163T/163T-LF

#### CLASS 125 PTFE DISC SWING CHECK



#### FEATURES


- Y-Pattern
- NPT
- PTFE Soft Seat
- 200 CWP
- 125 SWP
- Lead Free Option (NSF/ANSI/CAN 372)

#### STANDARDS

- MSS SP-80 Standard
- MSS SP-139 Lead Free Option (CWP only)
- ASTM B62 Bronze (ASTM B584-C89836 Lead Free)

#### APPROVALS

- CRN OC14667

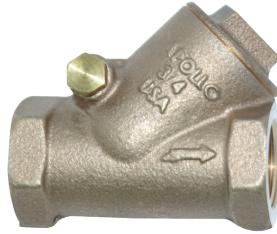

PART NUMBER	LF PART NUMBER	NPS	LENGTH (IN.)	HEIGHT (IN.)	WEIGHT (LB.)
61Y-203-T1	61YLF-203-T1	1/2	2.48	1.65	0.73
61Y-204-T1	61YLF-204-T1	3/4	2.94	1.90	1.06
61Y-205-T1	61YLF-205-T1	1	3.57	2.26	1.70
61Y-206-T1	61YLF-206-T1	1-1/4	4.50	2.99	3.30
61Y-207-T1	61YLF-207-T1	1-1/2	4.50	2.99	3.10
61Y-208-T1	61YLF-208-T1	2	5.25	3.74	5.40

Height is measured from centerline to top of unit.

### MODEL 164T

#### CLASS 150 BRONZE DISC SWING CHECK

#### FEATURES


- Y-Pattern
- NPT
- Bronze Seat
- 300 CWP
- 150 SWP

#### STANDARDS

- MSS SP-80 Standard
- ASTM B62 Bronze

#### APPROVALS

- CRN OC14667

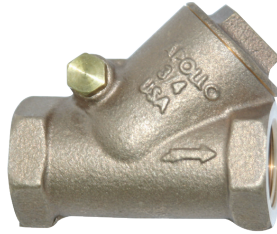

PART NUMBER	NPS	LENGTH (IN.)	HEIGHT (IN.)	WEIGHT (LB.)
61Y-213-01	1/2	2.48	1.65	0.73
61Y-214-01	3/4	2.94	1.90	1.06
61Y-215-01	1	3.57	2.26	1.70
61Y-216-01	1-1/4	4.50	2.99	3.30
61Y-217-01	1-1/2	4.50	2.99	3.10
61Y-218-01	2	5.25	3.74	5.50
61Y-219-01	2-1/2	8.00	5.11	11.70
61Y-210-01	3	9.24	6.05	17.80

Height is measured from centerline to top of unit.

### MODEL 168T

#### CLASS 300 BRONZE DISC SWING CHECK

#### FEATURES


- Y-Pattern
- NPT
- Bronze Seat
- 600 CWP
- 300 SWP

#### STANDARDS

- MSS SP-80 Standard
- ASTM B61 Bronze

#### APPROVALS

- CRN OC14667

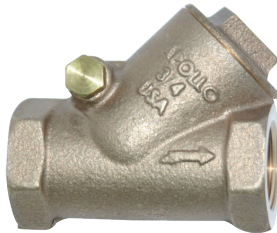

PART NUMBER	NPS	LENGTH (IN.)	HEIGHT (IN.)	WEIGHT (LB.)
61Y-753-01	1/2	2.50	1.65	.75
61Y-754-01	3/4	2.95	1.90	1.20
61Y-755-01	1	3.57	2.27	1.80
61Y-756-01	1-1/4	4.50	3.00	3.50
61Y-757-01	1-1/2	4.50	3.00	3.20
61Y-758-01	2	5.25	3.75	5.60

Height is measured from centerline to top of unit.

### MODEL 169T

#### CLASS 300 PTFE DISC SWING CHECK

#### FEATURES


- Y-Pattern
- NPT
- PTFE Soft Seat
- 600 CWP
- 300 SWP

#### STANDARDS

- MSS SP-80 Standard
- ASTM B61 Bronze

#### APPROVALS

- CRN OC14667

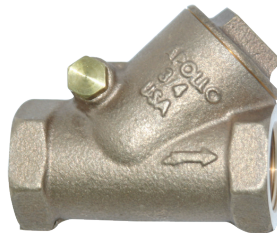

PART NUMBER	NPS	LENGTH (IN.)	HEIGHT (IN.)	WEIGHT (LB.)
61Y-753-T1	1/2	2.5	1.65	.75
61Y-754-T1	3/4	2.95	1.90	1.20
61Y-755-T1	1	3.57	2.27	1.80
61Y-756-T1	1-1/4	4.50	3.00	3.50
61Y-757-T1	1-1/2	4.50	3.00	3.20
61Y-758-T1	2	5.25	3.75	5.60

Height is measured from centerline to top of unit.

### MODEL 910F

#### CLASS 125 FLANGED SWING CHECK



#### PERFORMANCE RATING (-LFA) MODEL

- Saturated Steam:
  - 125 psi (8.6 Bar) at 353° F (2"-12")
  - 100 psi (6.9 Bar) at 338° F (14"-16")
- Cold Working Pressure:
  - 200 psi (13.8 Bar) at 100° F (2"-12")
  - 150 psi (10.3 Bar) at 100° F (14"-16")
- Temperature Range: -20° to 406° F max

#### STANDARD AND (-LF) MODELS

- Cold Working Pressure:
  - 200 psi (13.8 Bar) at 100° F (2"-12")
  - 150 psi (10.3 Bar) at 100° F (14")
- Temperature Range: -20° to - 180° F max

#### FEATURES

- Compatible with ANSI 125# & 150# Flanges
- Full Port
- Minimal Pressure Drop
- Flanged Connection
- Bolted Bonnet
- Integral Bronze Seat
- Apollo International™

#### APPROVALS

##### (LEAD FREE ONLY)

- NSF/ANSI/CAN 61 - Water Quality
- NSF/ANSI/CAN 372 - Lead Free

#### STANDARDS

- MSS SP-71 - Gray Iron Swing Check Valves  
Flanged and Threaded Ends
- ASME B16.10 - Face-to-Face and End-to-End Dimensions of Valves

STANDARD PART NO. (NOT FOR STEAM)	-LF PART NO. (NOT FOR STEAM)	-LFA PART NO. (STEAM RATED)	NPS	LENGTH (IN.)	HEIGHT (IN.)	WEIGHT (LB.)
-	-	6SC-108-B1-LFA	2	8.00	4.41	26.0
-	6SC-109-B1-LF	6SC-109-B1-LFA	2-1/2	8.50	5.24	39.0
-	-	6SC-100-B1-LFA	3	9.50	5.67	47.0
-	-	6SC-10A-B1-LFA	4	11.50	6.61	82.0
6SC-108-B1	-	6SC-108-B1-LFA	5	13.00	7.80	124
-	-	6SC-10C-B1-LFA	6	14.00	8.54	160
-	-	6SC-10E-B1-LFA	8	19.50	10.28	271
6SC-10G-01	-	6SC-10G-B1-LFA	10	24.50	11.30	437
-	-	6SC-10H-B1-LFA	12	27.50	12.56	644
6SC-10J-01	-	6SC-10J-01-LFA	14	31.00	17.50	950
-	-	6SC-10K-01-LFA	16	36.00	23.45	1160

Height is measured from centerline to top of unit.

### MODEL 910FLW

#### CLASS 125 FLANGED SWING CHECK



#### PERFORMANCE RATING (-LFA) MODEL

- Saturated Steam:
  - 125 psi (8.6 Bar) at 353° F (2"-8")
- Cold Working Pressure:
  - 200 psi (13.8 Bar) at 100° F (2"-8")
- Temperature Range: -20° to 406° F max

#### STANDARD AND (-LF) MODELS

- Cold Working Pressure:
  - 200 psi (13.8 Bar) at 100° F (2"-10")
- Temperature Range: -20° to 180° F max

#### FEATURES

- Compatible with ANSI 125# & 150# Flanges
- Full Port
- Minimal Pressure Drop
- Flanged Connection
- Bolted Bonnet
- Integral Seat
- Lever & Weight Design
- Apollo International™

#### STANDARDS

- MSS SP-71 - Gray Iron Swing Check Valves  
Flanged and Threaded Ends
- ASME B16.10 - Face-to-Face and End-to-End Dimensions of Valves

#### APPROVALS

##### (LEAD FREE ONLY)

- NSF/ANSI/CAN 61 - Water Quality
- NSF/ANSI/CAN 372 - Lead Free

STANDARD PART NO. (NOT FOR STEAM)	-LF PART NO. (NOT FOR STEAM)	-LFA PART NO. (STEAM RATED)	NPS	LENGTH (IN.)	HEIGHT (IN.)	WEIGHT (LB.)
-	-	6SC-108-B1L-LFA	2	8.00	4.41	38.8
6SC-109-B1L	-	6SC-109-B1L-LFA	2-1/2	8.50	5.24	45.2
-	6SC-100-B1L-LF	6SC-100-B1L-LFA	3	9.50	5.67	61.7
-	-	6SC-10A-B1L-LFA	4	11.50	6.61	99.2
-	-	6SC-10B-B1L-LFA	5	13.00	7.80	132
-	-	6SC-10C-B1L-LFA	6	14.00	8.54	170
-	-	6SC-10E-B1L-LFA	8	19.50	10.28	282
6SC-10G-B1L	-	-	10	24.50	11.30	439

Height is measured from centerline to top of unit.

NOTE: Flat face mating flanges and full face gaskets must be installed to avoid damage to the cast iron body.

### MODEL 920F

#### CLASS 250 FLANGED SWING CHECK



#### PERFORMANCE RATING (-LFA) MODEL

- Saturated Steam:  
250 psi (17.6 Bar) at 406° F (2"-8")
- Cold Working Pressure:  
500 psi (34.4 Bar) at 100° F (2"-8")
- Temperature Range: -20° to 406° F max

#### STANDARD MODEL

- Cold Working Pressure:  
500 psi (34.4 Bar) at 100° F (2"-8")
- Temperature Range: -20° to 180° F max

#### FEATURES

- Compatible with ANSI 250# & 300# Flanges
- Full Port
- Minimal Pressure Drop
- Flanged Connection
- Bolted Bonnet
- Integral Seat
- Apollo International™

#### STANDARDS

- MSS SP-71 - Gray Iron Swing Check Valves Flanged and Threaded Ends
- ASME B16.10 - Face-to-Face and End-to-End Dimensions of Valves
- ASME B1.1 - Unified Inch Screw Threads

#### APPROVALS

##### (LEAD FREE ONLY)

- NSF/ANSI/CAN 61 - Water Quality
- NSF/ANSI/CAN 372 - Lead Free

STANDARD PART NO. (NOT FOR STEAM)	-LFA PART NO. (STEAM RATED)	NPS	LENGTH (IN.)	HEIGHT (IN.)	WEIGHT (LB.)
6SC-208-B1	6SC-208-B1-LFA	2	10.51	4.41	30.0
-	6SC-209-B1-LFA	2-1/2	11.50	5.24	44.0
6SC-200-B1	6SC-200-B1-LFA	3	12.50	5.67	55.0
-	6SC-20A-B1-LFA	4	14.00	6.61	90.0
-	6SC-20C-B1-LFA	6	17.50	8.54	172
-	6SC-20E-01-LFA	8	21.00	10.28	289

Height is measured from centerline to top of unit.

NOTE: Class 250 flanges and flanged fittings have a 0.06 inch raised face in accordance with MSS SP-6.

### MODEL 910WB

CLASS 125 WAFER CHECK - NITRILE (BUNA-N)



#### FEATURES

- Compatible with ANSI 125# & 150# Flanges
- Full Port
- Minimal Pressure Drop
- Light Weight
- Spring Assisted Closing for Quicker Response
- Apollo International™

#### PERFORMANCE RATING

- 250 psi (17.2 Bar) Non-Shock Cold Working Pressure
- Maximum Temperature to 180°F (82°C)
- Not For Steam Use

#### APPROVALS

##### (LEAD FREE ONLY)

- NSF/ANSI/CAN 61 - Water Quality
- NSF/ANSI/CAN 372 - Lead Free

PART NUMBER	LF PART NUMBER	NPS	LENGTH (IN.)	HEIGHT (IN.)	WEIGHT (LB.)
6WC-108-N1	6WC-108-N1-LF	2	2.12	4.00	5.0
-	6WC-109-N1-LF	2-1/2	2.38	4.75	7.0
-	6WC-100-N1-LF	3	2.62	5.25	10.0
-	6WC-10A-N1-LF	4	2.62	6.75	12.0
-	6WC-10B-N1-LF	5	3.25	7.50	15.0
-	6WC-10C-N1-LF	6	3.75	8.50	22.0
-	6WC-10E-N1-LF	8	5.00	11.00	35.0
6WC-10G-N1	6WC-10G-N1-LF	10	5.50	13.25	66.0
-	6WC-10H-N1-LF	12	7.12	16.00	108

### MODEL 910WE

CLASS 125 WAFER CHECK - EPDM



#### FEATURES

- Compatible with ANSI 125# & 150# Flanges
- Full Port
- Minimal Pressure Drop
- Light Weight
- Spring Assisted Closing for Quicker Response
- Apollo International™

#### PERFORMANCE RATING

- Cold Working Pressure: 200 psi (13.8 Bar) at 100°F
- Temperature Range: -20°F to 180°F
- Not For Steam Use

#### APPROVALS

- CSA B51

#### APPROVALS

##### (LEAD FREE ONLY)

- NSF/ANSI/CAN 61 - Water Quality
- NSF/ANSI/CAN 372 - Lead Free

PART NUMBER	LF PART NUMBER	NPS	LENGTH (IN.)	HEIGHT (IN.)	WEIGHT (LB.)
6WC-108-E1	6WC-108-E1-LF	2	2.12	4.00	5.0
-	6WC-109-E1-LF	2-1/2	2.38	4.75	7.0
-	6WC-100-E1-LF	3	2.62	5.25	10.0
-	6WC-10A-E1-LF	4	2.62	6.75	12.0
6WC-10B-E1	-	5	3.25	7.50	15.0
-	6WC-10C-E1-LF	6	3.75	8.50	22.0
-	6WC-10E-E1-LF	8	5.00	11.00	35.0
6WC-10G-E1	6WC-10G-E1-LF	10	5.50	13.25	66.0
-	6WC-10H-E1-LF	12	7.12	16.00	108

### CV COEFFICIENTS

FOR FLOW ESTIMATION ONLY

SIZE	BRONZE GATE	BRONZE GLOBE	BRONZE SWING CHECK	CI GATE	CI GLOBE	CI SWING CHECK	CI WAFER CHECK
1/4	3.0	1.4	2.6	-	-	-	-
3/8	6.0	2.6	4.5	-	-	-	-
1/2	12.5	4.4	7.0	-	-	-	-
3/4	24.0	7.4	12.0	-	-	-	-
1	72.3	12.1	28.6	-	-	-	-
1-1/4	80	29	39	-	-	-	-
1-1/2	119	30	56	-	-	-	-
2	338	49	152	328	52	132	75
2-1/2	395	74	198	482	76	192	95
3	435	112	242	744	116	298	191
4	-	-	-	1316	204	526	377
5	-	-	-	2130	328	852	483
6	-	-	-	3176	488	1272	821
8	-	-	-	5692	874	2278	1590
10	-	-	-	8972	1376	3588	2920
12	-	-	-	13352	-	5342	4470
14	-	-	-	16278	-	6512	-
16	-	-	-	-	-	8626	-

### BRONZE GATE VALVE CROSS REFERENCE CHART

APOLLO MODEL	101T	101T-LF
APOLLO P/N	30-00X-01	30LF-00X-01
SIZE RANGE	1/4" TO 2 1/2"	1/2" TO 2 1/2"
DESCRIPTION	Class 125 (200 CWP, 125 SWP) Gate Valve Bronze Threaded Bonnet Solid Disc Rising Stem NPT	Class 125 (200 CWP, 125 SWP) Gate Valve LF-Bronze Threaded Bonnet Solid Disc Rising Stem NPT
DESIGN STANDARD	MSS SP-80	MSS SP-139 MSS SP-80
CRANE MODEL	428	
HAMMOND MODEL	IB640	UP640
KITZ MODEL	24	
MILWAUKEE MODEL	148	UP148
NIBCO MODEL	T111	
STOCKHAM MODEL	B100K	
WALWORTH MODEL	55	

APOLLO MODEL	102T	102T-LF	102T-K	103T	106T	107T	111T	116T
APOLLO P/N	30-03X-01	30LF-03X-01	30-03X-01K	30-05X-01	30-28X-01	30-20X-01	30-44X-01	30-45X-01
SIZE RANGE	1/4" TO 3"	1/4" TO 3"	1/2" TO 3"	1/2" TO 3"	3/8" TO 2"	1/4" TO 2"	1/2" TO 2"	1/2" TO 2"
DESCRIPTION	Class 125 (200 CWP, 125 SWP) Gate Valve Bronze Threaded Bonnet Solid Disc NRS NPT	Class 125 (200 CWP, 125 SWP) Gate Valve LF-Bronze Threaded Bonnet Solid Disc NRS NPT	Class 125 (200 CWP) Gate Valve Bronze Threaded Bonnet Solid Disc NRS NPT Irrigation X-Handle	Class 125 (200 CWP, 125 SWP) Gate Valve Bronze Union Bonnet Solid Disc Rising Stem NPT	Class 150 (300 CWP, 150 SWP) Gate Valve Bronze Threaded Bonnet Solid Disc NRS NPT	Class 150 (300 CWP, 150 SWP) Gate Valve Bronze Union Bonnet Solid Disc Rising Stem NPT	Class 300 (1000 CWP, 300 SWP) Gate Valve Bronze Union Bonnet Solid Disc Rising Stem NPT	Class 300 (1000 CWP, 300 SWP) Gate Valve Bronze Union Bonnet Solid Disc, SS Seats Rising Stem NPT
DESIGN STANDARD	MSS SP-80	MSS SP-139 MSS SP-80	MSS SP-80	MSS SP-80	MSS SP-80	MSS SP-80	MSS SP-80	MSS SP-80
CRANE MODEL	438			428UB	437	431UB	622E	634E
HAMMOND MODEL	IB645			IB617	IB646	IB629	IB652	IB654
KITZ MODEL	27	827			46	25	37	
MILWAUKEE MODEL	105	UP105		1152	1140	1151	1182	1184
NIBCO MODEL	T113	T113-LF	T113-K	T124	T133	T134	T174A	T174SS
STOCKHAM MODEL	B103K			B105K	B128K	B120K	B144K	B145K
WALWORTH MODEL	4			2	14	11	3048	



### BRONZE CHECK VALVE CROSS REFERENCE CHART

APOLLO MODEL	161S	161S-LF	161T	161T-LF	162T
APOLLO P/N	61Y-09X-01	61YLF-09X-01	61Y-19X-01	61YLF-19X-01	61Y-20X-VI
SIZE RANGE	1/2" to 2½"	1/2" to 2"	3/8" to 3"	1/2" to 2"	3/8" to 1"
DESCRIPTION	200 CWP Swing Check Bronze Y-Pattern Bronze Disc Solder Ends	200 CWP Swing Check LF-Bronze Y-Pattern Bronze Disc Solder Ends	Class 125 (200 CWP, 125 SWP) Swing Check Bronze Y-Pattern Bronze Disc NPT	Class 125 (200 CWP, 125 SWP) Swing Check LF-Bronze Y-Pattern Bronze Disc NPT	Class 125 (200 CWP, 125 SWP) Swing Check Bronze Y-Pattern Viton® Disc NPT
DESIGN STANDARD	MSS SP-80	MSS SP-139	MSS SP-80	MSS SP-139	MSS SP-80
CRANE MODEL	1340		37		
HAMMOND MODEL	IB912		IB904		
KITZ MODEL	23	823	22	822	
MILWAUKEE MODEL	1509	UP1509	509	UP509	
NIBCO MODEL	S413B		T413B		T413V
STOCKHAM MODEL	B309YK		B319YK		B320BYK
WALWORTH MODEL	3406SJ		3406		

APOLLO MODEL	163S-LF	163T	163T-LF	164T	168T	169T
APOLLO P/N	61YLF-10X-T1	61Y-20X-T1	61YLF-20X-T1	61Y-21X-01	61Y-75X-01	61Y-75X-T1
SIZE RANGE	1/2" to 2"	1/2" to 2"	1/2" to 2"	1/2" to 3"	1/2" to 2"	1/2" to 2"
DESCRIPTION	200 CWP Swing Check LF-Bronze Y-Pattern PTFE Disc Solder Ends	Class 125 (200 CWP, 125 SWP) Swing Check Bronze Y-Pattern PTFE Disc NPT	Class 125 (200 CWP, 125 SWP) Swing Check LF-Bronze Y-Pattern PTFE Disc NPT	Class 150 (300 CWP, 150 SWP) Swing Check Bronze Y-Pattern Bronze Disc NPT	Class 300 (600 CWP, 300 SWP) Swing Check Bronze Y-Pattern Bronze Disc NPT	Class 300 (600 CWP, 300 SWP) Swing Check Bronze Y-Pattern PTFE Disc NPT
DESIGN STANDARD	MSS SP-139	MSS SP-80	MSS SP-139	MSS SP-80	MSS SP-80	MSS SP-80
CRANE MODEL		41TF		137	76E	
HAMMOND MODEL		IB940			IB949	
KITZ MODEL	823T	22T	822T	29	19	
MILWAUKEE MODEL		509T		510	507	
NIBCO MODEL	S413Y-LF	T413Y	T413Y-LF	T433b	T473B	T473Y
STOCKHAM MODEL		B320TYK		B321K	B375K	
WALWORTH MODEL					3428	



### BRONZE GLOBE VALVE CROSS REFERENCE CHART

APOLLO MODEL	120S-LF	120T	120T-LF	121T	121T-LF	122T	127T	128T
APOLLO P/N	33LF-14X-01	33-13X-01	33LF-13X-01	33-16X-01	33LF-16X-01	33-22X-01	33-66X-01	33-74X-01
SIZE RANGE	1/2" to 2"	1/2" to 2"	1/2" to 2"	1/2" to 2"	1/2" to 2"	1/2" to 2"	1/2" to 2"	1/2" to 2"
DESCRIPTION	200 CWP Globe Valve LF-Bronze Threaded Bonnet PTFE Disc Solder Ends	Class 125 (200 CWP, 125 SWP) Globe Valve Bronze Threaded Bonnet PTFE Disc NPT	Class 125 (200 CWP, 125 SWP) Globe Valve LF-Bronze Threaded Bonnet PTFE Disc NPT	Class 125 (200 CWP, 125 SWP) Globe Valve Bronze Threaded Bonnet Bronze Disc NPT	Class 125 (200 CWP, 125 SWP) Globe Valve LF-Bronze Threaded Bonnet Bronze Disc NPT	Class 150 (300 CWP, 150 SWP) Globe Valve Bronze Union Bonnet PTFE Disc NPT	Class 300 (1000 CWP, 300 SWP) Globe Valve Bronze Union Bonnet Bronze Disc NPT	Class 300 (1000 CWP, 300 SWP) Globe Valve Bronze Union Bonnet SS Disc NPT
DESIGN STANDARD	MSS SP-80	MSS SP-80	MSS SP-139	MSS SP-80	MSS SP-139 MSS SP-80	MSS SP-80	MSS SP-80	MSS SP-80
CRANE MODEL		5TF		1		7TF		382P
HAMMOND MODEL				IB440		IB413T	IB412	IB444
KITZ MODEL				11		02	17	17S
MILWAUKEE MODEL	UP1502			502	UP502	590T	572	593A
NIBCO MODEL		T211Y		T211b		T235Y	T275B	T276-AP
STOCKHAM MODEL		B13TK		B16K		B22TK	B66K	B74K
WALWORTH MODEL				3058		3095	3205	

### IRON GLOBE VALVE CROSS REFERENCE CHART

APOLLO MODEL	711F	721F
APOLLO P/N	6GB-11X-B1-LFA	6GB-21X-B1-LFA
SIZE RANGE	2" to 10"	2" to 8"
DESCRIPTION	Class 125 Flanged Globe Valve Cast Iron OS&Y IBBM	Class 250 Flanged Globe Valve Cast Iron OS&Y IBBM
DESIGN STANDARD	MSS SP-85	MSS SP-85
CRANE MODEL	351	21E
HAMMOND MODEL	IR116	IR313
KITZ MODEL		
MILWAUKEE MODEL	2981M	2983M
NIBCO MODEL	F718B	F768B
STOCKHAM MODEL	G512	F532
WALWORTH MODEL	W906F	W955F

### IRON GATE VALVE

#### CROSS REFERENCE CHART

APOLLO MODEL	610F	620F	611F	621F
APOLLO P/N	6GA-10X-B1-LFA	6GA-20X-B1-LFA	6GA-11X-B1-LFA	6GA-21X-B1-LFA
SIZE RANGE	2" to 12"	2" to 12"	2" to 14"	2" to 8"
DESCRIPTION	Class 125 Flanged Gate Valve Cast Iron NRS IBBM	Class 250 Flanged Gate Valve Cast Iron NRS IBBM	Class 125 Flanged Gate Valve Cast Iron OS&Y IBBM	Class 250 Flanged Gate Valve Cast Iron OS&Y IBBM
DESIGN STANDARD	MSS SP-70	MSS SP-70	MSS SP-70	MSS SP-70
CRANE MODEL	461		465 1/2	7 1/2E
HAMMOND MODEL	IR1138		IR1140	IR330
KITZ MODEL				
MILWAUKEE MODEL	2882M		2885M	2894M
NIBCO MODEL	F619	F669	F617-0	F667-0
STOCKHAM MODEL	G612	F661	G623	F667
WALWORTH MODEL	W719F		W726F	W786F

### IRON CHECK VALVE

#### CROSS REFERENCE CHART

APOLLO MODEL	910F	910FLW	920F	910WB	910WE
APOLLO P/N	6SC-10X-B1-LFA	6SC-10X-B1L-LFA	6SC-20X-B1-LFA	6WC-10X-N1-LF	6WC-10X-E1-LF
SIZE RANGE	2" to 16"	2" to 8"	2" to 8"	2" to 12"	2" to 12"
DESCRIPTION	Class 125 Flanged Swing Check Cast Iron IBBM	Class 125 Flanged Swing Check Cast Iron IBBM w/ lever & weight	Class 250 Flanged Swing Check Cast Iron IBBM	Class 125 Wafer Check Nitrile Cast Iron	Class 125 Wafer Check EPDM Cast Iron
DESIGN STANDARD	MSS SP-71	MSS SP-71	MSS SP-71		
CRANE MODEL	373	383	39E		
HAMMOND MODEL	IR1124		IR322	IR9253	
KITZ MODEL					
MILWAUKEE MODEL	2974M	C2974MLW	2970M	1400	
NIBCO MODEL	F918B	F918BLW	F968B	W910B	
STOCKHAM MODEL	G931	G931W	F947	WG970	WG961
WALWORTH MODEL	W928F		W8970F		

### STANDARDS (GATE, GLOBE, SWING & WAFER CHECKS ONLY)

#### BRONZE STANDARDS COMPLIANCE:

ASME B1.20.1 - Pipe Threads, General Purpose (Inch)  
 ASME B16.18 - Cast Copper Solder Joint Pressure Fittings  
 ASTM B61 - Standard Specification for Steam or Valve Bronze Castings  
 ASTM B62 - Composition Bronze or Ounce Metal Castings  
 ASTM B371 - Standard Specification for Copper-Zinc-Silicon Alloy Rod  
 ASTM B584 - Standard Specification for Copper Alloy Sand Castings for General Applications\*  
 MSS SP-25 - Standard Marking System for Valves, Fittings and Flanges  
 MSS SP-80 - Bronze Gate, Globe, Angle and Check Valves  
 MSS SP-139 - Copper Alloy Gate, Globe, Angle, and Check Valves for Low Pressure/Low Temperature Plumbing Applications\*  
 CRN-0C14467.5C (gates and globes) and CRN-0C11218.5C (swing checks) (see [www.apollovalves.com](http://www.apollovalves.com) for specific provinces)  
 Canadian Registration Number in accordance with CSA B51 Boiler, Pressure Vessel and Pressure Piping Code  
 NSF/ANSI/CAN 61 - Water Quality, 3rd party certified (lead free versions only)  
 NSF/ANSI/CAN 372 - Lead Free, 3rd party certified (lead free versions only)

#### CAST IRON STANDARDS COMPLIANCE:

ASME B16.1 - Cast Iron Pipe Flanges and Flanged Fittings (Class 125 - flat faced flanged, Class 250 - 0.06 inch raised faced in accordance with MSS SP-6)  
 ASME B16.10 - Face-to-Face and End-to-End Dimensions of Valves  
 ASTM A126 - Specification for Gray Iron Castings for Valves, Flanges and Pipe Fittings  
 ASTM A307 - Specification for Carbon Steel Bolts and Studs, 60000 psi Tensile Strength  
 MSS SP-25 - Standard Marking System for Valves, Fittings and Flanges and Unions  
 MSS SP-70 - Gray Iron Gate Valves Flanged and Threaded Ends  
 MSS SP-71 - Gray Iron Swing Check Valves Flanged and Threaded Ends  
 MSS SP-85 - Gray Iron Globe and Angle Valves Flanged and Threaded Ends  
 CRN-0C14467.xx (see [www.apollovalves.com](http://www.apollovalves.com) for specific provinces)  
 Canadian Registration Number in accordance with CSA B51 Boiler, Pressure Vessel and Pressure Piping Code.  
 NSF/ANSI/CAN 61 - Water Quality, 3rd party certified (lead free versions only)  
 NSF/ANSI/CAN 372 - Lead Free, 3rd party certified (lead free versions only)

#### CAUTIONS:

Bubble tight shut-off should not be expected on metal seated check valves. MSS Standards for Bronze (MSS SP-80) and for Cast Iron (MSS SP-71) define acceptable leakage rates as 40 ml of water per hour per inch of Nominal Pipe Size (NPS) for valves 1" and larger or 0.4 Standard Cubic Foot (SCF) air per hour per inch of NPS. For valves smaller than 1" the allowable leak rate is 40 ml of water per hour or 0.4 SCF of air per hour.

Bubble tight shut-off should not be expected on metal to metal seated gate or globe valves. MSS Standards for Bronze (MSS SP-80) and for Cast Iron (MSS SP-70 and MSS SP-85) define acceptable leakage rates as 10 ml of water per hour per inch of Nominal Pipe Size (NPS) for valves 1" and larger or 0.1 SCF of air per hour per inch of NPS. For valves smaller than 1" the allowable leak rate is 10 ml of water per hour or 0.1 SCF of air per hour.

Gate valves are not recommended for throttling service and should only be used in the fully open or fully closed positions to minimize vibration and chatter which may damage the seat or wedge. For throttling applications refer to Apollo's globe valve offering.

Safe working pressures and temperatures for solder end valve depends not only on the valve and tubing strength, but also on the composition of the solder used to produce the joints. It is the responsibility of the user to choose a solder that is compatible with the service conditions.

Properly sized swing check valves frequently are smaller than the pipe in which they are used. This practice keeps velocities up so the valve operates near full open, minimizing noise and vibration while maximizing valve life.

### IN-LINE CHECK VALVES

Series 61 and lead free (61LF) check valves feature bronze body construction and are available in sizes 1/4" to 3" for use with water, steam, oil, air and inert gases. Series 62 model in stainless steel with investment cast body are sized from 1/4" to 2" for use in more severe applications and corrosive environments.

61 and 62 Series check valves are available with either RPTFE ball cone or elastomer soft seats. They come equipped with 316 stainless steel springs. All wetted parts are bronze/brass (61 Series) or stainless steel (62 Series).

### SPRING ASSISTED CLOSING

Apollo's 61 and 62 Series feature short check travel and spring assisted closing. This ensures the valve closes quickly, before reversal of flow, helping to eliminate water hammer, its associated noise, and damage to piping and machinery.

### LOW CRACKING PRESSURE

Apollo's standard 61 and 62 Series checks operate at a low 1/2 psi cracking pressure. An extra-light-spring version of the valve is available as an option. A 5-pound or 10-pound cracking pressure spring is also available on models through 1".

### TIGHT...OR BUBBLE TIGHT

Patented Apollo Ball Cone® check valves (61-100, 61-200 and 62-100) feature a tight-sealing RPTFE ball-shaped check which seats against the conical interior face of the valve's metal retainer. This simple design provides exceptional resistance to wear and corrosion. But, where even tighter sealing is required, choose the 61-500 or 61-600, featuring EPDM (elastomer) seat or 62-500, featuring a Fluorocarbon (Viton®) seat, for a bubble-tight seal. A Nitrile seat is optional.

### CHECK VALVES EXTEND SYSTEM LIFE

In any liquid or gas system where reverse flow cannot be tolerated, a quick-responding check valve is a necessity. Check valves that close slowly permit flow reversal to occur in the line which can cause severe mechanical shock. As the valve finally seats, high peak pressure pulses and shock waves are generated on the downstream side due to the media being forced to a sudden stop. Upstream, the momentum is not restricted which can create voids in the flow, filling with air or vapor to cause additional, lower frequency shock waves. These shock waves added together are known as water hammer. It can cause extensive damage or failure to pipelines, gaskets, supports, hardware and equipment. The result can be expensive, troublesome; even dangerous.

With Apollo check valves, the potential for water hammer is greatly reduced since the check returns to its seat before flow velocity reaches zero. Apollo's check valves set the standard for compact, economical protection against reverse flow. They provide reliable service in liquids or gases at various temperature and pressure combinations. Because of their simple design, they're versatile and easy to maintain.

### USE IN ANY POSITION

Horizontal, vertical or upside down; liquid, air and gases; Apollo's in-line checks operate in any orientation. Where frequent opening and closing cycles occur, vertical orientation with upward flow is best. This saves time and money, eliminating the need to stock separate vertical and horizontal-operating valves. It also makes new or replacement installation less of a headache.

\*Not recommended for use with reciprocating pumps and similar applications. Low flows may result in undesirable noise and premature valve failure.

### BROAD RANGE OF APPLICATIONS

Apollo check valves are at home in applications from residential boilers to tough process systems, including:

Industries where Apollo's check valves are used include Pulp & Paper, Chemical Processing, Agrichemical, Rubber, Petroleum, Primary Metals, Mining, Power Generation, Textiles, Food and Beverage, Building Construction and Maintenance.

- |               |                        |                          |                           |
|---------------|------------------------|--------------------------|---------------------------|
| • Evaporators | • Cookers              | • Rubber/Plastic Presses | • Metering Pumps          |
| • Boiler Feed | • Chiller Systems      | • Autoclaves             | • Casing Vents            |
| • Water Lines | • Steam Tracer Lines   | • Sterilizers            | • Condensate Return Lines |
| • Steam Lines | • Salt Water Injection | • Air and Gas Lines      | • Chemical Lines          |

### 61-100 & 61-200 SERIES IN-LINE BALL CONE® CHECK VALVE



**61-100**  
FEMALE X FEMALE THREADED  
1/4" THROUGH 3"



**61-200**  
MALE X FEMALE THREADED  
1/4" THROUGH 2"



#### STANDARD MATERIALS LIST

<b>BODY</b>	Bronze, ASTM B584, UNS C84400 or Lead Free Bronze, C89836
<b>RETAINER</b>	(1/4" - 1-1/4") Brass, ASTM B16 or C27451 (1-1/2" - 3") Bronze, ASTM B584 or C89836
<b>BALL CHECK</b>	RPTFE
<b>GUIDE</b>	Brass, ASTM B16 or LF Brass, C27451
<b>SPRING</b>	Stainless Steel

#### FLOW RATE (C<sub>v</sub>)

SIZE	GPM
1/4"	0.85
3/8"	1.21
1/2"	1.4
3/4"	3.53
1"	6
1-1/4"	44
1-1/2"	65
2"	81
2-1/2"	175
3"	265

GPM=gallons per minute at  
1 psi pressure differential

#### PRESSURE TEMPERATURE RATING

DEGREE (F)	PSIG
-20 TO 100	400
200	200
250	160
275	150
300	140
325	130
353	125


The Apollo 61 Series check valve with rugged bronze body and patented design (U.S. Pat. No. 4,172,465) RPTFE ball-cone check provides reliable protection against reverse flow. It is spring-loaded for fast seating and center guided for optimum alignment.

#### FEATURES


- Standard 1/2 psi Cracking Pressure
- Tight Shut-Off with Liquid Media
- Male and Female NPT Inlet Options
- 400 psig CWP @ 100°F
- 125 psig Steam Rating @ 350°F max
- Straight-Through Flow Minimizes Pressure Loss
- ASTM B584 Bronze
- Lead Free Option 61LF (NSF/ANSI/CAN 61 & NSF/ANSI/CAN 372)
- Proudly Made in USA

#### DIMENSIONS

BRONZE FNPT X FNPT	LF BRONZE FNPT X FNPT	BRONZE MNPT X FNPT	SIZE	DIMENSIONS (IN.)			61-100 SERIES WT./100	61-200 SERIES WT./100
				A	B	C		
61-101-01	61LF-101-01	61-201-01	1/4"	2.06	1.12	1.12	38	38
61-102-01	61LF-102-01	61-202-01	3/8"	2.12	1.12	1.12	37	37
61-103-01	61LF-103-01	61-203-01	1/2"	2.31	1.12	1.12	36	36
61-104-01	61LF-104-01	61-204-01	3/4"	2.87	1.37	1.50	75	76
61-105-01	61LF-105-01	61-205-01	1"	3.50	1.75	1.93	145	145
61-106-01	61LF-106-01	61-206-01	1-1/4"	4.18	2.12	2.37	275	237
61-107-01	61LF-107-01	61-207-01	1-1/2"	4.93	2.50	2.81	394	381
61-108-01	61LF-108-01	61-208-01	2"	6.00	3.00	3.68	630	636
61-109-01	61LF-109-01	-	2-1/2"	7.00	3.50	4.50	1400	-
61-100-01	61LF-100-01	-	3"	8.12	4.12	5.31	1665	-

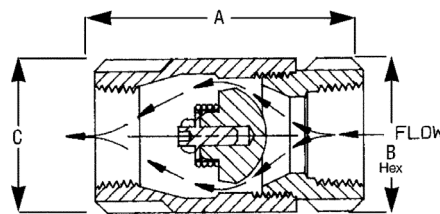

61-100

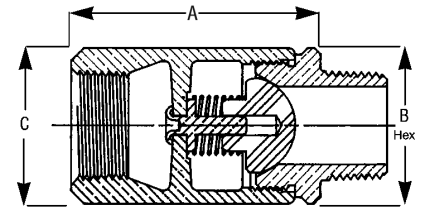

61-200

NOTE: Not recommended for use with reciprocating pumps and similar applications. Low flows may result in undesirable noise and premature valve wear.

#### PART NO. MATRIX

61 X X	- X	X	X	- XX
TYPE	CHECK	SPRING TYPE	SIZE (IN.)	OPTIONS
61 - BRONZE	1 - BALL CONE (NPT-F X F)	0 - .5 PSIG CRACKING PRESSURE	1 - 1/4"	01 - STANDARD
61LF - LEAD FREE BRONZE	2 - BALL CONE (NPT-M X F)	2 - .2 PSIG CRACKING PRESSURE	2 - 3/8"	PO1 - BSPP THREAD** (STD. MATERIALS ONLY)
	0 - BALL CONE REPAIR KIT		3 - 1/2"	TO1 - BSPT THREAD** (STD. MATERIALS ONLY)
			4 - 3/4"	17 - SATIN CHROME PLATED
			5 - 1"	57 - OXYGEN CLEANED
			6 - 1-1/4"	A1 - LESS SPRING
			7 - 1-1/2"	B1 - NITRILE SEAT (BUNA N)
			8 - 2"	E05 - 5 PSIG OPENING PRESSURE*
			9 - 2-1/2"	E10 - 10 PSIG OPENING PRESSURE*
			0 - 3"	

\*Available in 1/4" through 1" only. | \*\*Minimums apply  
(Note: Not all combinations are available. Contact Customer Service for verification.)

### 62-100 SERIES

#### STAINLESS STEEL BALL CONE® CHECK VALVE



**62-100**  
**FEMALE X FEMALE THREADED**  
**1/4" THROUGH 2"**

The Apollo 62-100 Series is uniquely suited for applications in corrosive environments, including chemical processing, pulp and paper and other process industries. The rugged stainless steel body and RPTFE ball cone check provide reliable, patented protection against reverse flow.

#### FEATURES

- Standard 1/2 psi Cracking Pressure
- Unique Design (U.S. Patent # 4,172,465)
- Spring-Loaded For Fast Seating Action
- Center Guided; Radial Alignment Never Needed
- Straight-Through Flow Minimizes Pressure Loss
- 400 psig CWP Non-Shock @ 100°F
- 125 psig SWP @ 350°F
- RoHS and REACH Compliant
- ASTM A351, CF8M
- Proudly Made in USA

#### STANDARD MATERIALS LIST

<b>BODY</b>	SS, ASTM A351, CF8M
<b>RETAINER</b>	SS, ASTM A276, 316 (1/4" - 1") SS, ASTM A351, CF8M (1-1/4" - 2")
<b>BALL CHECK</b>	RPTFE
<b>GUIDE</b>	SS, ASTM A276, 316
<b>SPRING</b>	Stainless Steel

#### FLOW RATE (C<sub>v</sub>)

SIZE	GPM
1/4"	0.85
3/8"	1.21
1/2"	1.4
3/4"	3.53
1"	6
1-1/4"	44
1-1/2"	65
2"	81



GPM=gallons per minute at  
1 psi pressure differential

#### PRESSURE TEMPERATURE RATING

DEGREE (F)	PSIG
-20 TO 100	400
200	200
250	160
275	150
300	140
325	130
353	125

#### DIMENSIONS

PART NO. FNPT X FNPT	SIZE	DIMENSIONS (IN.)			WT./100
		A	B	C	
62-101-01	1/4"	2.06	1.12	1.12	38
62-102-01	3/8"	2.12	1.12	1.12	37
62-103-01	1/2"	2.31	1.12	1.12	36
62-104-01	3/4"	2.87	1.37	1.50	75
62-105-01	1"	3.50	1.75	1.93	145
62-106-01	1-1/4"	4.18	2.12	2.37	237
62-107-01	1-1/2"	4.93	2.50	2.81	381
62-108-01	2"	6.00	3.00	3.68	636

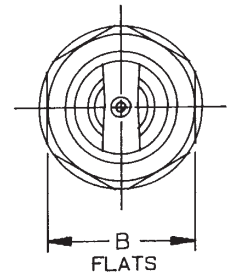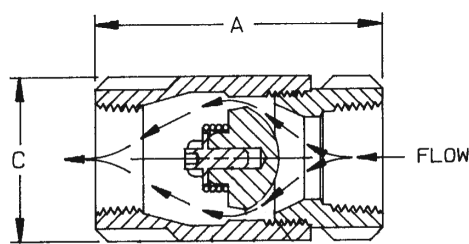

NOTE: Not recommended for use with reciprocating pumps and similar applications. Low flows may result in undesirable noise and premature valve wear.

#### PART NO. MATRIX

62	- X	X	X	- XX
TYPE	CHECK	SPRING TYPE	SIZE (IN.)	OPTIONS
62 - STAINLESS STEEL (316)	1 - BALL CONE (NPT-F X F)	0 - .5 PSIG CRACKING PRESSURE	1 - 1/4"	01 - STANDARD
	0 - BALL CONE REPAIR KIT	2 - .2 PSIG CRACKING PRESSURE	2 - 3/8"	PO1 - BSPP THREAD**
			3 - 1/2"	TO1 - BSPT THREAD**
			4 - 3/4"	17 - SATIN CHROME PLATED
			5 - 1"	57 - OXYGEN CLEANED
			6 - 1-1/4"	A1 - LESS SPRING
			7 - 1-1/2"	E05 - 5 PSIG OPENING PRESSURE*
			8 - 2"	E10 - 10 PSIG OPENING PRESSURE*

\*Available in 1/4" through 1" only.

\*\*Minimums apply

(Note: Not all combinations are available. Contact Customer Service for verification.)

### 61-500 & 61-600 SERIES IN-LINE SOFT SEAT CHECK VALVE



**61-500**  
FEMALE X FEMALE THREADED  
1/4" THROUGH 2"



**61-600**  
FEMALE X FEMALE SWEAT  
1/2" THROUGH 2"



The Apollo 61 Series check valve is ideally suited for hydronic heating and other low flow applications. The rugged bronze body and check provide reliable protection against reverse flow.

#### FEATURES

- Female NPT Sizes: 1/4" to 2"
- Solder Sizes: 1/2" to 1"
- Bubble-Tight Shut-Off, Ideally Suited for Gaseous Service
- NPT Threaded; 400 psig CWP Non-Shock @ 100°F
- EPDM Check Disc (61-500)
- Straight-Through Flow Minimizes Pressure Loss
- 1/2 psi Cracking Pressure
- RoHS Compliant (61LF and 62 Series)
- NSF/ANSI/CAN 61 - Water Quality (LF Models)
- NSF/ANSI/CAN 372 - Lead Free (LF Models)
- Proudly Made in USA

#### DIMENSIONS

PART NO.	LF PART NO.	SIZE	DIMENSIONS (IN.)			WT./100
			A	B	C	
61-500 (FNPT)						
61-501-01	61LF-501-01	1/4"	2.31	1.12	1.12	38
61-502-01	61LF-502-01	3/8"	2.31	1.12	1.12	37
61-503-01	61LF-503-01	1/2"	2.31	1.12	1.12	36
61-504-01	61LF-504-01	3/4"	2.87	1.37	1.50	75
61-505-01	61LF-505-01	1"	3.50	1.75	1.93	145
61-506-01	61LF-506-01	1-1/4"	4.18	2.12	2.37	275
61-507-01	61LF-507-01	1-1/2"	4.93	2.50	2.81	394
61-508-01	61LF-508-01	2"	6.00	3.00	3.68	630
61-600 (SOLDER)						
61-603-01	61LF-603-01	1/2"	2.75	1.12	1.25	38
61-604-01	61LF-604-01	3/4"	3.68	1.50	1.62	75
61-605-01	61LF-605-01	1"	4.50	1.93	2.12	145
61-606-01	61LF-606-01	1-1/4"	6.11	2.13	2.38	330
61-607-01	61LF-607-01	1-1/2"	6.87	2.50	2.81	610
61-608-01	61LF-608-01	2"	7.46	3.38	3.75	1010




#### STANDARD MATERIALS LIST

<b>BODY</b>	Bronze, ASTM B584, UNS C84400 or Lead Free Bronze, C89836
<b>RETAINER</b>	(1/4" - 1-1/4") Brass, ASTM B16 or LF Brass, ASTM (1-1/2" - 3") Bronze, ASTM B584 or C89836
<b>SEAT</b>	EPDM
<b>GUIDE PIN</b>	Stainless Steel
<b>SPRING</b>	Stainless Steel
<b>CHECK</b>	Brass, ASTM B16 or Lead Free Brass, ASTM 27451
<b>GUIDE</b>	Brass, ASTM B16 or Lead Free Brass, ASTM 27451

#### FLOW RATE (C<sub>v</sub>)

SIZE	GPM	
	61-500	61-600
1/4"	0.85	-
3/8"	1.21	-
1/2"	1.4	2.20
3/4"	3.53	4.78
1"	6	6
1-1/4"	44	44
1-1/2"	65	65
2"	81	81

GPM=gallons per minute at  
1 psi pressure differential

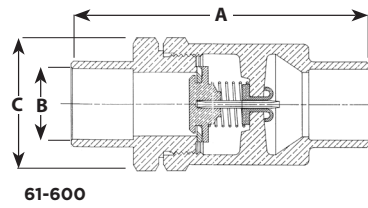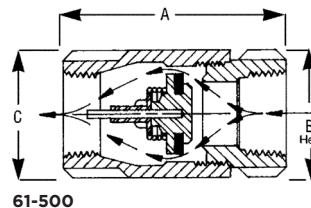

NOTE: Not recommended for use with reciprocating pumps and similar applications. Low flows may result in undesirable noise and premature valve wear.

#### PART NO. MATRIX

61 X X	- X	X	X	- XX
TYPE	CHECK	SPRING TYPE	SIZE (IN.)	OPTIONS
61 - BRONZE	5 - SOFT SEAT (NPT-F X F)	0 - .5 PSIG CRACKING PRESSURE	1 - 1/4"	01 - STANDARD (EPDM SEAT)
61LF - LEAD FREE BRONZE	6 - SOFT SEAT (SOLDER)	2 - .2 PSIG CRACKING PRESSURE	2 - 3/8"	PO1 - BSPP THREAD (ISO 228)** (STD. MATERIALS ONLY)
	9 - SOFT SEAT REPAIR KIT (EPR ONLY)		3 - 1/2"	TO1 - BSPT THREAD (EN 10226)** (STD. MATERIALS ONLY)
			4 - 3/4"	17 - SATIN CHROME PLATED
			5 - 1"	57 - OXYGEN CLEANED
			6 - 1-1/4"	A1 - LESS SPRING
			7 - 1-1/2"	B1 - NITRILE SEAT (BUNA N)
			8 - 2"	V1 - VITON SEAT
				E05 - 5 PSIG OPENING PRESSURE*
				E10 - 10 PSIG OPENING PRESSURE*

\*Available in 1/4" through 1" only. | \*\*Minimums apply  
(Note: Not all combinations are available. Contact Customer Service for verification.)



### 62-500 SERIES

#### IN-LINE SOFT SEAT CHECK VALVE



**62-500**  
FEMALE X FEMALE THREADED  
1/4" THROUGH 1"

The Apollo 62-500 Series is ideal for fluid flow applications in tough industrial environments. The stainless steel body and check provide lasting protection against reverse flow.

#### FEATURES

- Bubble-Tight Shut-Off, Ideally Suited for Gaseous Service
- 400 psig CWP non-shock
- Viton® Check Disc
- 1/2 psi Cracking Pressure
- RoHS and REACH Compliant
- CRN OC 11218.5C
- Proudly Made in USA

#### STANDARD MATERIALS LIST

<b>BODY</b>	Stainless Steel, ASTM A351, CF8M
<b>RETAINER</b>	Stainless Steel, ASTM A276, 316
<b>SEAT</b>	Viton®
<b>SPRING</b>	Stainless Steel, 316
<b>CHECK</b>	Stainless Steel, ASTM A276, 316


#### FLOW RATE (C<sub>v</sub>)

SIZE	GPM
1/4"	0.47
3/8"	1.57
1/2"	2.20
3/4"	4.78
1"	6

GPM=gallons per minute at  
1 psi pressure differential

#### DIMENSIONS

PART NO. FNPT X FNPT	SIZE	DIMENSIONS (IN.)			WT./100
		A	B	C	
62-501-01	1/4"	2.312	1.125	1.125	38
62-502-01	3/8"	2.312	1.125	1.125	37
62-503-01	1/2"	2.312	1.125	1.125	36
62-504-01	3/4"	2.875	1.375	1.500	75
62-505-01	1"	3.500	1.750	1.937	150

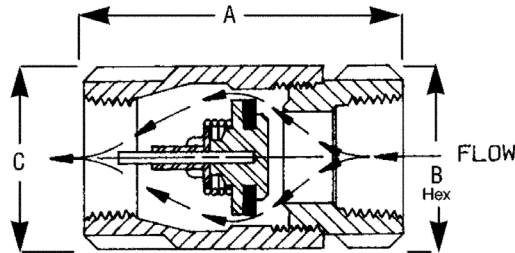

NOTE: Not recommended for use with reciprocating pumps and similar applications. Low flows may result in undesirable noise and premature valve wear.

#### PART NO. MATRIX

62	- X	X	X	- XX
TYPE	CHECK	SPRING TYPE	SIZE (IN.)	OPTIONS
62 - STAINLESS STEEL (316)	5 - SOFT SEAT (NPT-F X F)	0 - .5 PSIG CRACKING PRESSURE	1 - 1/4"	01 - STANDARD (VITON SEAT)
	9 - SOFT SEAT REPAIR KIT	2 - .2 PSIG CRACKING PRESSURE	2 - 3/8"	PO1 - BSPP THREAD (ISO 228)**
	(VITON ONLY)		3 - 1/2"	TO1 - BSPT THREAD (EN 10226)**
			4 - 3/4"	57 - OXYGEN CLEANED
			5 - 1"	A1 - LESS SPRING
				B1 - NITRILE SEAT (BUNA N)
				F1 - EPDM SEAT
				E05 - 5 PSIG OPENING PRESSURE*
				E10 - 10 PSIG OPENING PRESSURE*

\*Available in 1/4" through 1" only.

\*\*Minimums apply

(Note: Not all combinations are available. Contact Customer Service for verification.)

### 61-700 SERIES MINI CHECK VALVE



**61-700**  
**FEMALE X FEMALE PIPE THREAD**  
**1/4" THROUGH 1"**

#### STANDARD MATERIALS LIST

<b>BODY</b>	Brass, ASTM B16"
<b>CHECK</b>	Acetal/Brass/Silicone/Buna-N
<b>SPRING</b>	Stainless Steel 302

\*Not intended for use in potable water applications.

#### FLOW RATE (C<sub>v</sub>)

SIZE	GPM
1/4"	0.78
3/8"	1.81
1/2"	6.00
3/4"	11.50
1"	17.50

GPM=gallons per minute at  
1 psi pressure differential


The Apollo 61-700 Series check valve is ideally suited for cold water, and air applications for prevention of reverse flow. The modular check cartridge provides superior leak-tight performance with low pressure loss. It is rated at 230 PSIG with a maximum temperature of 200°F.

#### FEATURES

- Sizes: 1/4" to 1"
- FNPT x FNPT
- Acetyl Check Valve Body
- Nitrile (Buna-N) Check Seals
- ASTM B16 Brass Housing
- 1/2 psi Cracking Pressure
- Proudly Made in USA

#### DIMENSIONS

PART NUMBER	SIZE	DIMENSIONS (IN.)			WT./100
		A	B	C	
61-701-01	1/4"	1.72	0.81	0.92	22
61-702-01	3/8"	1.79	0.93	1.05	29
61-703-01	1/2"	2.02	1.06	1.17	38
61-704-01	3/4"	2.50	1.25	1.40	54
61-705-01	1"	2.95	1.62	1.76	110

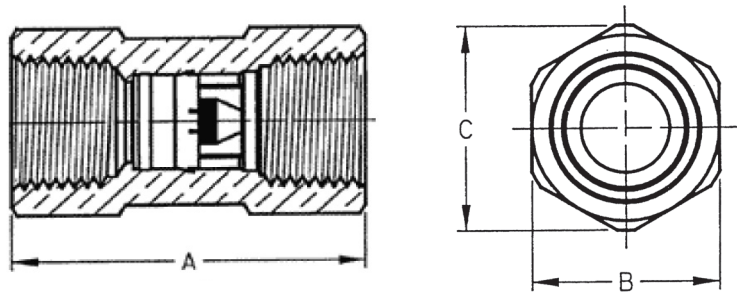

### 70-100-BC SERIES

#### BALL VALVE WITH INTEGRAL CHECK



**70-100-BC**  
**FEMALE X FEMALE THREADED**  
**1/2" THROUGH 2"**

#### STANDARD MATERIALS LIST

1	BODY	B584-C84400
2	RETAINER	B16 (1/2" - 1") B584-C84400 (1-1/4" - 2")
3	BALL	Brass, B16 (Chrome Plated)
4	CHECK INSERT	Acetal
5	STEM	Brass, B16
6	GLAND NUT	Brass, B16
7	LEVER/GRIP	Steel, Zinc-Plated w/ Vinyl
8	LEVER NUT	Steel, Zinc-Plated
9	O-RING	Buna-N
10	SEATS	RPTFE
11	BODY SEAL	TFE (1-1/4" - 2")
12	STEM PACKING	RPTFE
13	STEM BEARING	RPTFE
14	SEAL	EPDM (1/2")
15	RETAINING RING	Spring Steel (1/2")

\*Not intended for use in potable water applications.



The 70-100-BC Series ball valve combines two functions in a single design: positive shut-off and bubble-tight check capabilities. The BC Series is a unidirectional version of the industry-standard Apollo 70 Series ball valve. An easy flow design and superior check valve make these valves a smart choice for water or air in mechanical systems or OEM applications. Rated at 250 psi CWP and maximum temperature of 200°F.

#### FEATURES

- Blowout-Proof Stem
- RPTFE Seats and Stuffing Box Ring
- Adjustable Packing Gland
- Chromium-Plated Ball
- Positive Shut-Off and Bubble-Tight Check Capability
- 1/2 psi Cracking Pressure
- Proudly Made in USA


#### DIMENSIONS

PART NUMBER	SIZE	DIMENSIONS (IN.)					WT./100
		A	B	C	D	E	
70-103-BC	1/2"	0.50	1.12	2.25	1.80	3.87	0.63
70-104-BC	3/4"	0.68	4.50	3.00	2.12	4.87	1.33
70-105-BC	1"	0.87	1.68	3.37	2.25	4.87	1.77
70-106-BC	1-1/4"	1.00	2.00	4.00	2.73	5.50	3.29
70-107-BC	1-1/2"	1.25	2.18	4.37	3.09	8.00	4.63
70-108-BC	2"	1.50	2.34	4.68	3.28	8.00	6.01

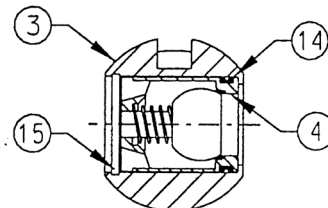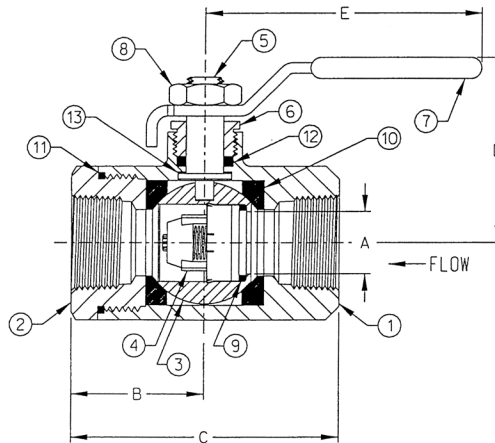

### REPAIR KITS

#### IN-LINE CHECK VALVES

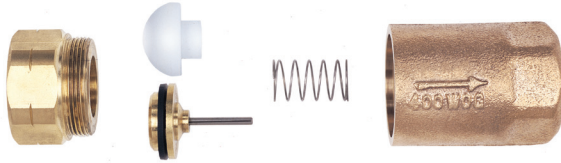

#### 61-100/61LF-100 REPAIR KITS INCLUDE:

SPRING, BALL CONE CHECK & INSTRUCTIONS

SIZE (IN.)	CHECK VALVE PART NO.	LF CHECK VALVE PART NO.	STANDARD (LEAD FREE) REPAIR KIT PART NO.
1/4"	61-101-01	61LF-101-01	61-001-01
3/8"	61-102-01	61LF-102-01	61-002-01
1/2"	61-103-01	61LF-103-01	61-003-01
3/4"	61-104-01	61LF-104-01	61-004-01
1"	61-105-01	61LF-105-01	61-005-01
1-1/4"	61-106-01	61LF-106-01	61-006-01
1-1/2"	61-107-01	61LF-107-01	61-007-01
2"	61-108-01	61LF-108-01	61-008-01
2-1/2"	61-109-01	61LF-109-01	61-009-01
3"	61-100-01	61LF-100-01	61-010-01

#### 61-200 REPAIR KITS INCLUDE:


SPRING, BALL CONE CHECK & INSTRUCTIONS

SIZE (IN.)	CHECK VALVE PART NO.	STANDARD (LEAD FREE) REPAIR KIT PART NO.
1/4"	61-201-01	61-001-01
3/8"	61-202-01	61-002-01
1/2"	61-203-01	61-003-01
3/4"	61-204-01	61-004-01
1"	61-205-01	61-005-01
1-1/4"	61-206-01	61-006-01
1-1/2"	61-207-01	61-007-01
2"	61-208-01	61-008-01

#### 61-500/61LF-500 REPAIR KITS INCLUDE:

SPRING, CHECK ASSEMBLY & INSTRUCTIONS

SIZE (IN.)	CHECK VALVE PART NO.	LF CHECK VALVE PART NO.	STANDARD (LEAD FREE) REPAIR KIT PART NO.
1/4"	61-501-01	61LF-501-01	61-901-01
3/8"	61-502-01	61LF-502-01	61-902-01
1/2"	61-503-01	61LF-503-01	61-903-01
3/4"	61-504-01	61LF-504-01	61-904-01
1"	61-505-01	61LF-505-01	61-905-01
1-1/4"	61-506-01	-	61-906-01
1-1/2"	61-507-01	-	61-907-01
2"	61-508-01	-	61-908-01

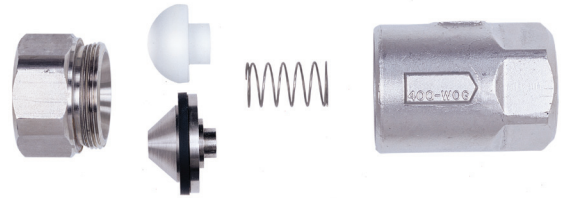

#### 61-600 REPAIR KITS INCLUDE:

SPRING, CHECK ASSEMBLY & INSTRUCTIONS

SIZE (IN.)	CHECK VALVE PART NO.	REPAIR KIT PART NO.
1/2"	61-603-01	61-903-01
3/4"	61-604-01	61-904-01
1"	61-605-01	61-905-01
1-1/4"	61-606-01	61-906-01
1-1/2"	61-607-01	61-907-01
2"	61-608-01	61-908-01

#### 62-100 REPAIR KITS INCLUDE:

SPRING, BALL CONE CHECK & INSTRUCTIONS

SIZE (IN.)	CHECK VALVE PART NO.	REPAIR KIT PART NO.
1/4"	62-101-01	62-001-01
3/8"	62-102-01	62-002-01
1/2"	62-103-01	62-003-01
3/4"	62-104-01	62-004-01
1"	62-105-01	62-005-01
1-1/4"	62-106-01	62-006-01
1-1/2"	62-107-01	62-007-01
2"	62-108-01	62-008-01

#### 62-500 REPAIR KITS INCLUDE:

SPRING, CHECK ASSEMBLY & INSTRUCTIONS

SIZE (IN.)	CHECK VALVE PART NO.	REPAIR KIT PART NO.
1/4"	62-501-01	62-901-01
3/8"	62-502-01	62-902-01
1/2"	62-503-01	62-903-01
3/4"	62-504-01	62-904-01
1"	62-505-01	62-905-01