




CPVC/PVC VALVES

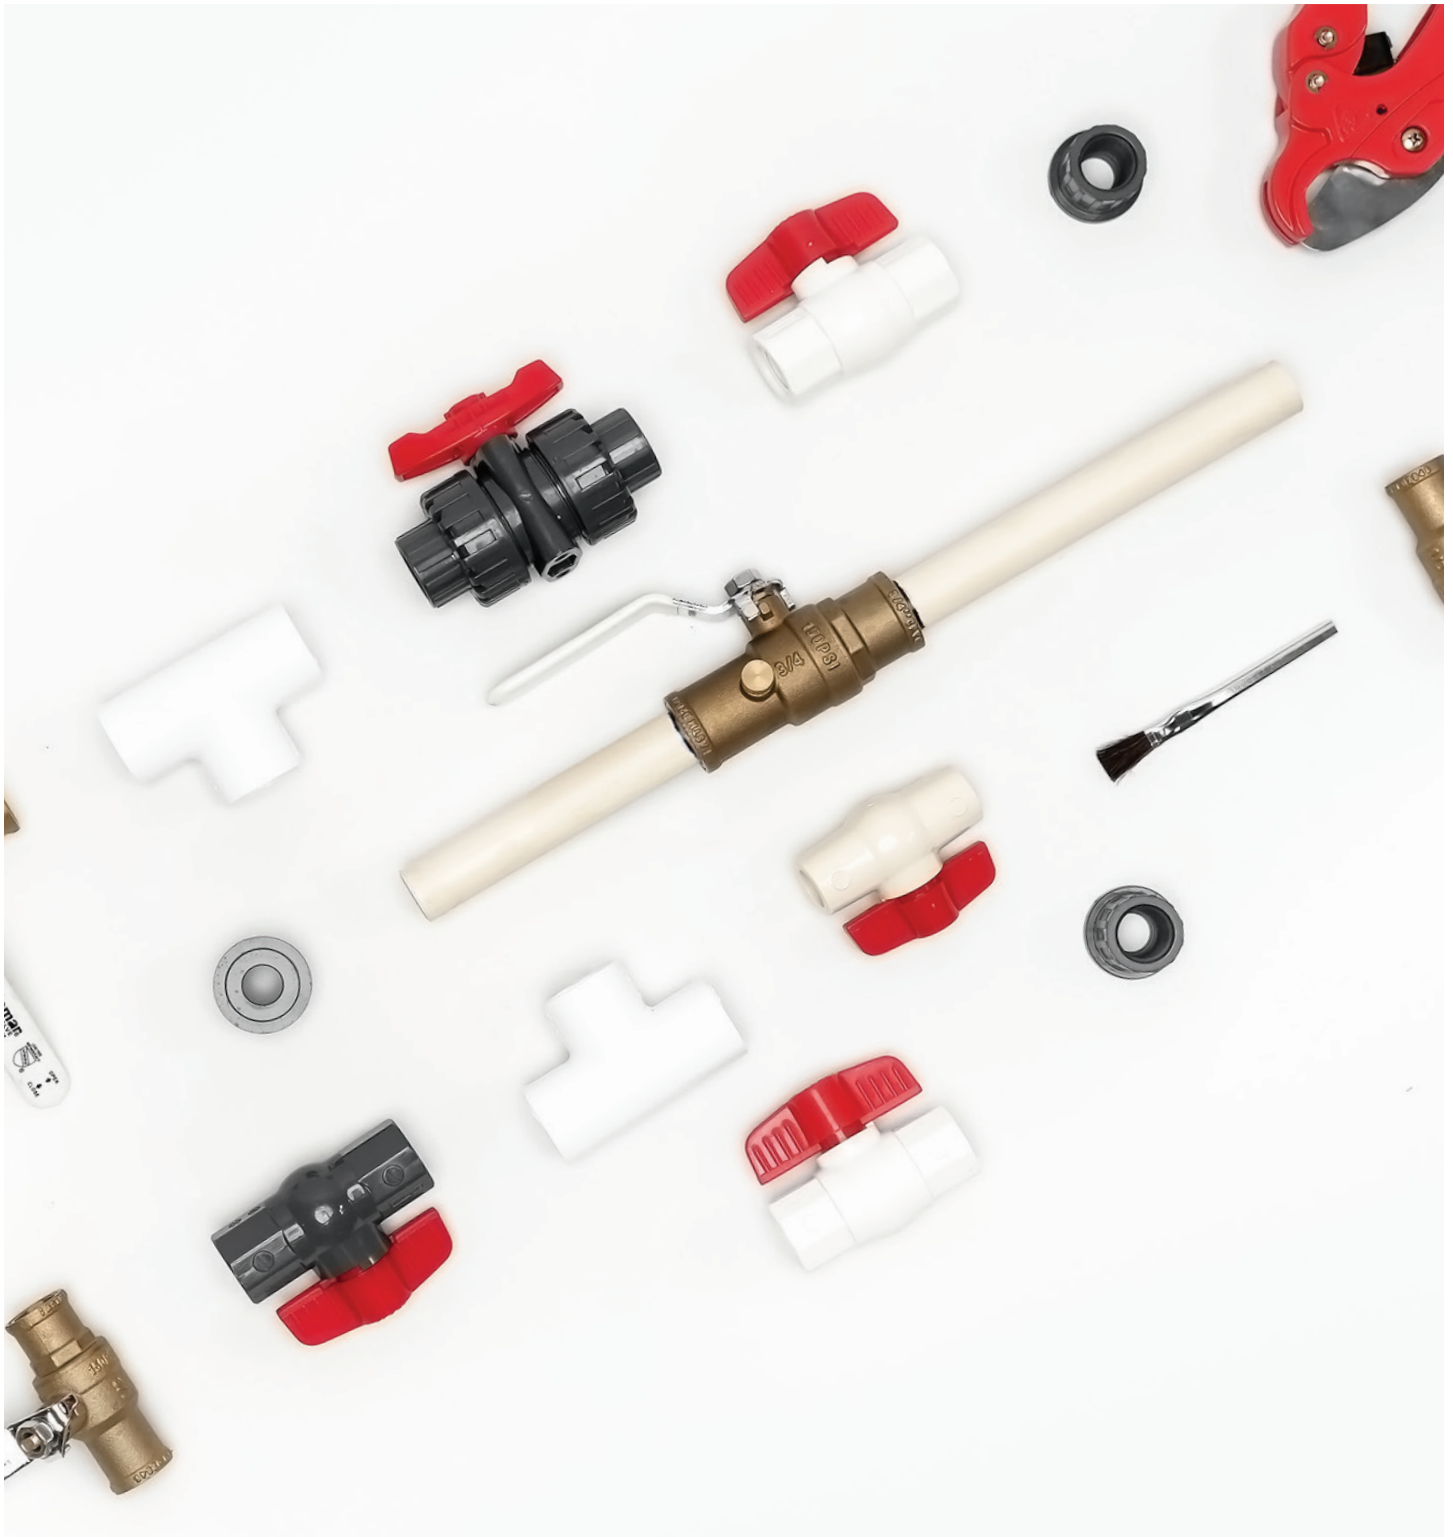

S-155G

CPVC, 2 Piece, Full Port, Solvent Connection, 150 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
150-603G	1/2"	54	6	29
150-604G	3/4"	48	4	40
150-605G	1"	18	2	26

- Dezincification Resistant Brass Alloy
- Standard CTS
- For Hot/Cold Water Systems
- Quarter-Turn Operation
- Standard CPVC Installation
- CPVC End Connection Inserts



S-165G

CPVC, 2 Piece, Full Port, Solvent Connection with Drain, 150 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
150-663G	1/2"	54	6	31
150-664G	3/4"	48	4	41
150-665G	1"	18	2	26

- Dezincification Resistant Brass Alloy
- Standard CTS
- For Hot/Cold Water Systems
- Drain Tap 1/8" Orifice
- Standard CPVC Installation
- CPVC End Connection Inserts



**S-605**

CPVC, Solvent Connection, Copper Tube Size, 150 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
210-603	1/2"	100	10	13
210-604	3/4"	100	5	22
210-605	1"	100	8	39
210-606	1-1/4"	100	5	59
210-607	1-1/2"	48	4	59
210-608	2"	48	1	62

- Standard CTS
- Large Port
- For Hot/Cold Water Systems
- Quarter-Turn Operation
- Easy Installation
- Bone Color
- Wetted Surfaces Contain Less than .25% Lead Content

**T/S-703**

Tru-Union PVC, Threaded and Solvent Connections, Schedule 80, 150 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
210-543	1/2"	48	48	21
210-544	3/4"	36	36	25
210-545	1"	24	24	24
210-546	1-1/4"	24	24	40
210-547	1-1/2"	24	24	59
210-548	2"	12	12	51
210-549	2-1/2"	12	6	75
210-550	3"	6	4	54
210-551	4"	1	1	25

- NPS Connections
- Easy Installation with Hand Tightened Union Nuts
- Easy Line Breakdowns Without Installing Additional Unions
- Full Port Design; Minimum Flow Restrictions
- Manufactured/Assembled Without Hydrocarbon Lubricants
- Mounting Pads for Electric or Pneumatic Actuation
- Wetted Surfaces Contain Less than .25% Lead Content

**T-701**

PVC, Threaded Connection, Schedule 80, 150 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
210-203	1/2"	100	10	20
210-204	3/4"	100	10	32
210-205	1"	100	8	50
210-206	1-1/4"	100	5	66
210-207	1-1/2"	48	4	66
210-208	2"	24	8	40
210-209	2-1/2"	12	4	40
210-210	3"	12	6	56
210-211	4"	6	4	57

- Corrosion Resistant PVC Material
- NPS Connections
- Minimal Pressure Drop/Turbulence
- 100% Tested
- Wetted Surfaces Contain Less than .25% Lead Content





S-701

PVC, Solvent Connection, Schedule 80, 150 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
210-223	1/2"	100	10	20
210-224	3/4"	100	10	32
210-225	1"	100	8	50
210-226	1-1/4"	100	5	66
210-227	1-1/2"	48	4	66
210-228	2"	24	8	40
210-229	2-1/2"	12	4	40
210-230	3"	12	6	56
210-231	4"	6	4	57

- Corrosion Resistant PVC Material
- NPS Connections
- Minimal Pressure Drop/Turbulence
- 100% Tested
- Wetted Surfaces Contain Less than .25% Lead Content



T-702

PVC, Threaded Connection, Schedule 40, 150 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
210-703	1/2"	100	10	20
210-704	3/4"	100	10	32
210-705	1"	80	10	40
210-706	1-1/4"	50	10	33
210-707	1-1/2"	24	6	33
210-708	2"	24	3	40

- NPS Connections
- Minimal Pressure Drop/Turbulence
- 100% Tested
- Wetted Surfaces Contain Less than .25% Lead Content



S-702

PVC, Solvent Connection, Schedule 40, 150 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
210-723	1/2"	100	10	20
210-724	3/4"	100	10	32
210-725	1"	80	10	40
210-726	1-1/4"	50	10	33
210-727	1-1/2"	24	6	33
210-728	2"	24	3	40

- NPS Connections
- Minimal Pressure Drop/Turbulence
- 100% Tested
- Wetted Surfaces Contain Less than .25% Lead Content

