



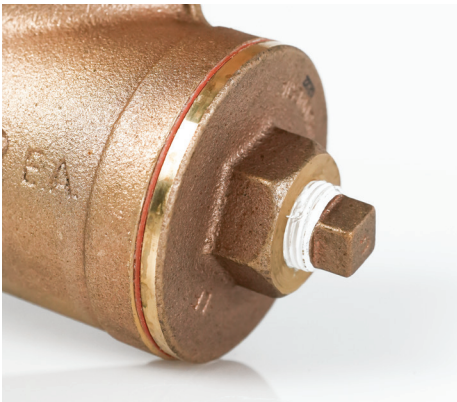

FNPT PLUGGED CAP

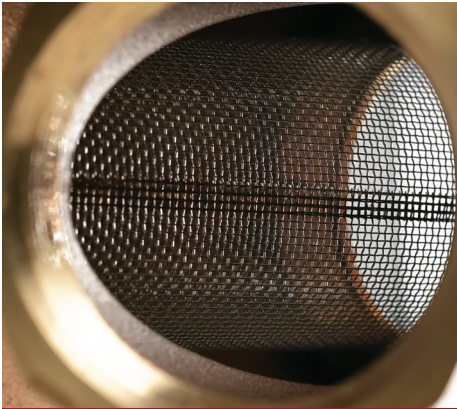

304 STAINLESS STEEL MESH SCREEN

T-651G



T-651G

Y-Strainer, Threaded Connection, 20 Stainless Steel Mesh, 150 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
106-303G	1/2"	48	12	34
106-304G	3/4"	32	8	39
106-305G	1"	16	8	30
106-306G	1-1/4"	12	6	34
106-307G	1-1/2"	12	2	44
106-308G	2"	8	2	48
106-309G	2-1/2"	4	1	40
106-310G	3"	4	1	30

- Dezincification Resistant Bronze
- Residential and Commercial Applications
- 1/2" - 3/4": 3/8" FNPT Plugged Cap
- 1" - 3": 1/2" FNPT Plugged Cap
- Truesdail Certified - NSF/ANSI/CAN 61 & NSF 372
- Wetted Surfaces Contain Less than .25% Lead Content



CERTIFIED LEAD FREE

NSF/ANSI/CAN 61 & 372



S-651G

Y-Strainer, Solder Connection, 20 Stainless Steel Mesh, 150 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
106-403G	1/2"	48	12	34
106-404G	3/4"	32	8	37
106-405G	1"	16	8	27
106-406G	1-1/4"	12	6	31
106-407G	1-1/2"	12	2	42
106-408G	2"	8	2	45

- Dezincification Resistant Bronze
- Residential and Commercial Applications
- 1/2" - 3/4" have 3/8" FNPT Plugged Cap
- 1" - 2" have 1/2" FNPT Plugged Cap
- Truesdail Certified - NSF/ANSI/CAN 61 & NSF 372
- Wetted Surfaces Contain Less than .25% Lead Content



CERTIFIED LEAD FREE

NSF/ANSI/CAN 61 & 372





F-651

Y-Strainer, Bolted Bonnet, Stainless Steel Screen, Class 125

LEAD FREE

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
106-625	2-1/2"	1	1	22
106-603	3"	1	1	28
106-604	4"	1	1	36
106-606	6"	1	1	73
106-608	8"	1	1	123
106-610	10"	1	1	291
106-612	12"	1	1	454

- Bolted Bonnet
- 1/4" NPT Test Plug Upstream and Downstream
- Flange: ASME B16.1

