


True Union Ball Valves



The T/S-603 True Union Ball Valve features a bottom-loaded blowout-proof stem, a maintenance-free dual o-ring stem seal and durable PTFE seats. The T/S-603 includes both the solvent and threaded adapters to suit whichever connection type your job requires.

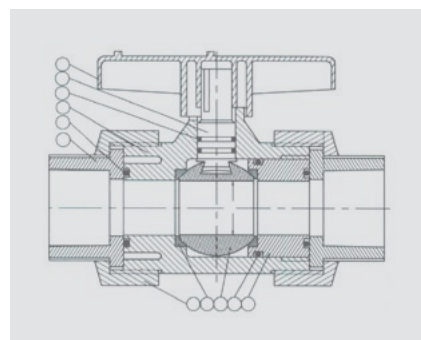

Certifications	Part No.	Size	Configuration	Model	Cs.	Ct.
T/S-603 True Union Ball Valve with FNPT & Solvent Adapters Naturally lead free For Schedule 80 & Schedule 40 Pipe 150 psi @ 73°F Max. Temp. 140°F	201-203	1/2"	FNPT x FNPT; Solvent x Solvent	T/S-603	48	1
	201-204	3/4"	FNPT x FNPT; Solvent x Solvent	T/S-603	36	1
	201-205	1"	FNPT x FNPT; Solvent x Solvent	T/S-603	24	1
	201-206	1-1/4"	FNPT x FNPT; Solvent x Solvent	T/S-603	24	1
	201-207	1-1/2"	FNPT x FNPT; Solvent x Solvent	T/S-603	24	1
	201-208	2"	FNPT x FNPT; Solvent x Solvent	T/S-603	12	1
	201-209	2-1/2"	Solvent	T/S-603	6	1
	201-210	3"	Solvent	T/S-603	6	1
	201-211	4"	Solvent	T/S-603	1	1
T/S-603V True Union Ball Valve with Viton O-Rings and FNPT & Solvent Adapters Naturally lead free For Schedule 80 & Schedule 40 Pipe 150 psi @ 73°F Max. Temp. 140°F	201-183	1/2"	FNPT x FNPT; Solvent x Solvent	T/S-603V	48	1
	201-184	3/4"	FNPT x FNPT; Solvent x Solvent	T/S-603V	36	1
	201-185	1"	FNPT x FNPT; Solvent x Solvent	T/S-603V	24	1
	201-186	1-1/4"	FNPT x FNPT; Solvent x Solvent	T/S-603V	24	1
	201-187	1-1/2"	FNPT x FNPT; Solvent x Solvent	T/S-603V	24	1
	201-188	2"	FNPT x FNPT; Solvent x Solvent	T/S-603V	12	1
S-643 Flanged True Union Ball Valve Naturally lead free 150 psi @ 73°F	201-233	1/2"	Flange x Flange	S-643	24	1
	201-234	3/4"	Flange x Flange	S-643	24	1
	201-235	1"	Flange x Flange	S-643	12	1
	201-236	1-1/4"	Flange x Flange	S-643	12	1
	201-237	1-1/2"	Flange x Flange	S-643	12	1
	201-238	2"	Flange x Flange	S-643	12	1
	201-239	2-1/2"	Flange x Flange	S-643	4	1
	201-240	3"	Flange x Flange	S-643	2	1
	201-241	4"	Flange x Flange	S-643	1	1



Certifications	Part No.	Size	Configuration	Model	Cs.	Ct.
T-645 / S-645 Single-Union Ball Valve Naturally lead free For Schedule 80 & Schedule 40 Pipe 150 psi @ 73°F Max. Temp. 140°F	201-243	1/2"	FNPT x FNPT	T-645	48	1
	201-244	3/4"	FNPT x FNPT	T-645	36	1
	201-245	1"	FNPT x FNPT	T-645	24	1
	201-246	1-1/4"	FNPT x FNPT	T-645	24	1
	201-247	1-1/2"	FNPT x FNPT	T-645	24	1
	201-248	2"	FNPT x FNPT	T-645	12	1
	201-253	1/2"	Solvent x Solvent	S-645	48	1
	201-254	3/4"	Solvent x Solvent	S-645	36	1
	201-255	1"	Solvent x Solvent	S-645	24	1
	201-256	1-1/4"	Solvent x Solvent	S-645	24	1
	201-257	1-1/2"	Solvent x Solvent	S-645	24	1
	201-258	2"	Solvent x Solvent	S-645	12	1



T/S-603 Adapters



FNPT End Adapters

Solvent End Adapters for UPVC True Union Ball Valves

900-006	1"	Solvent	T/S-603	999	1
900-007	1-1/2"	Solvent	T/S-603	999	1
900-008	2"	Solvent	T/S-603	999	1
900-009	2-1/2"	Solvent	T/S-603	999	1
900-010	3"	Solvent	T/S-603	999	1
900-011	4"	Solvent	T/S-603	18	1

FNPT End Adapters for UPVC True Union Ball Valves

201-225	1"	FNPT	T/S-603	999	1
201-227	1-1/2"	FNPT	T/S-603	999	1
201-228	2"	FNPT	T/S-603	999	1
201-229	2-1/2"	FNPT	T/S-603	20	1
201-230	3"	FNPT	T/S-603	999	1
201-231	4"	FNPT	T/S-603	24	1

Commercial Plastic Butterfly Valves

T-650 / S-651

Wafer-Type Butterfly Valve

Naturally lead free
 EPDM Seat and O-rings
 150 psi @ 73°F



S-650

S-651

S-650 Wafer-Type Butterfly Valve with 7-Position Lever Handle

201-263	2"	Flange x Flange	S-650	4	1
201-264	2-1/2"	Flange x Flange	S-650	4	2
201-265	3"	Flange x Flange	S-650	2	1
201-266	4"	Flange x Flange	S-650	4	1
201-268	6"	Flange x Flange	S-650	4	1
201-269	8"	Flange x Flange	S-650	1	1

S-651 Wafer-Type Butterfly Valve with Gear Operator Handle

201-270	8"	Flange x Flange	S-651	1	1
201-271	10"	Flange x Flange	S-651	1	1
201-272	12"	Flange x Flange	S-651	1	1

Certifications	Part No.	Size	Configuration	Model	Cs.	Ct.
T-611 / S-611 PVC In-Line Spring Check Valve Naturally lead free 150 psi @ 73°F 0.5 psi cracking pressure 304 SS Spring	203-103	1/2"	FNPT x FNPT	T-611	120	10
	203-104	3/4"	FNPT x FNPT	T-611	120	10
	203-105	1"	FNPT x FNPT	T-611	80	8
	203-106	1-1/4"	FNPT x FNPT	T-611	60	1
	203-107	1-1/2"	FNPT x FNPT	T-611	60	6
	203-108	2"	FNPT x FNPT	T-611	40	4



T-611

203-203	1/2"	Solvent x Solvent	S-611	120	10
203-204	3/4"	Solvent x Solvent	S-611	120	10
203-205	1"	Solvent x Solvent	S-611	80	8
203-206	1-1/4"	Solvent x Solvent	S-611	60	6
203-207	1-1/2"	Solvent x Solvent	S-611	60	6
203-208	2"	Solvent x Solvent	S-611	40	4

T-655 / S-655

Single-Union Ball-Cone Check Valve

Naturally lead free
 150 psi @ 73°F



T-655

201-273	1/2"	FNPT x FNPT	T-655	150	1
201-274	3/4"	FNPT x FNPT	T-655	100	1
201-275	1"	FNPT x FNPT	T-655	50	1
201-277	1-1/2"	FNPT x FNPT	T-655	24	1
201-278	2"	FNPT x FNPT	T-655	12	1

201-283	1/2"	Solvent x Solvent	S-655	150	1
201-284	3/4"	Solvent x Solvent	S-655	100	1
201-285	1"	Solvent x Solvent	S-655	50	1
201-287	1-1/2"	Solvent x Solvent	S-655	24	1
201-288	2"	Solvent x Solvent	S-655	12	1

Foot Valve Screen for T/S-655 Check Valves

Naturally lead free



Used to convert a T/S-655 Check Valve into a Foot Valve.

201-297	One-size	For 1-1/2" Valves
201-298	One-size	For 2" Valves