

Now includes our  
**LEAD FREE\***  
product offering



## Backflow Prevention Products



watts.com

**WATTS®**



# Table of Contents

General Information.....	2
Backflow Applications.....	2
<b>Section 1 – Double Check Valve Assemblies</b>	
757, 757N .....	4
LF709.....	6
LF007 , 007 .....	8
774 .....	11
LF719 , 719 .....	12
<b>Section 2 – Double Check Detector Assemblies</b>	
LF757DCDA , 757DCDA , LF757NDCDA , 757NDCDA.....	14
774DCDA .....	16
709DCDA .....	18
007DCDA, 007M1DCDA .....	20
<b>Section 3 – Reduced Pressure Zone Assemblies</b>	
957, 957N, 957Z .....	22
994 .....	24
LF909 .....	26
LF009 , 009 .....	30
994BLT, 994HMB .....	33
LF919 , 919 .....	34
<b>Section 4 – Reduced Pressure Detector Assemblies</b>	
LF957RPDA, 957RPDA, LF957NRPDA, 957NRPDA, LF957ZRPDA, 957ZRPDA .....	36
994RPDA .....	38
909RPDA .....	39
<b>Section 5 – Dual Check Valves</b>	
LFN9 .....	40
9BD .....	41
LFN9-CD .....	42
9D.....	43
912HP .....	44
SD2 , SD3 .....	45
LF7 .....	47
LF7R.....	48
LF07S.....	49
<b>Section 6 – Vacuum Breakers</b>	
LF8, 8.....	50
LF800M4QT, 800M4QT .....	52
LF800M4FR, 800M4FR.....	54
LF008PCQT .....	56
LF288A, LF289, LFN388 and 188A.....	58
<b>Section 7 – Miscellaneous Backflow Products</b>	
WB .....	60
TWS .....	61
SS07F .....	62
Test Kits .....	63
Test Cocks.....	64
Caps & Tethers .....	64
Air Gaps, Elbows .....	65
Spools, Flanges, Setters.....	66
Transition Risers .....	67
PVS-1000 Pre-engineered Valve Stations .....	68
BIC-1000 Backflow Irrigation Control Stations.....	69
FR 500 Thermostatic Freeze Relief Kits.....	70
<b>Section 8 – Guide to Options</b> .....	71
<b>Section 9 – Flow Charts</b> .....	73

Note: Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

Celcon® is a registered trademark of Celanese Corporation.  
Noryl® is a registered trademark of SABIC Innovative Plastics Holding BV.

# General Information

Backflow is defined as the reverse flow of contaminated or undesirable substance into the potable water supply. Installing a backflow preventer can protect the water supply from this very serious type of situation. This product guide includes information on Watts' complete line of backflow prevention devices.

## Code Requirements

All major plumbing code bodies address protection against backflow. All potential or existing cross-connections must be protected from backflow by installing a proper backflow prevention device. Consult your national and local plumbing code authorities for more specific information on your code requirements.

## Backflow Definitions


**Backpressure:** Pressure, higher than the supply pressure, caused by a pump, elevated tank, boiler, or other means that can cause backflow.

**Backsiphonage:** Backflow caused by negative or reduced pressure in the supply piping.

**Cross-connection:** A connection or potential connection between any part of the potable water system and another environment where undesirable substances could enter the potable water system. Contaminated or undesirable substances can include gases, liquids, or solids, such as chemicals, waste products, steam, water from other sources (potable or non-potable), or any other matter that can change the color of or add odor to the water. Bypass arrangements, jumper connections, removable sections, swivel or changeover assemblies, or any other temporary or permanent connecting arrangement where backflow can occur are considered cross-connections.

**Health hazard:** A cross-connection or potential cross-connection where any substance that could cause death, illness, or spread disease, or have a high probability of causing such effects, could be introduced into the potable water supply.

**Non-health hazard:** A cross-connection or potential cross-connection where any substance introduced into the potable water supply would generally not be considered a health hazard, but would constitute a nuisance or be aesthetically objectionable.

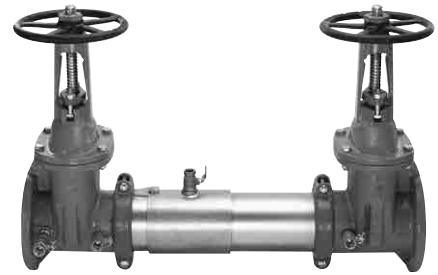

757 OSY

## LEAD FREE

Backflow prevention has critical implications in potable water supply systems. With the changeover to Lead Free in the United States effective January 4, 2014, Lead Free backflow prevention devices are required in many applications and/or settings. The Watts backflow preventer product line includes a full complement of Lead Free versions of our trusted & reliable backflow products.

# Backflow Applications

TYPE & PURPOSE	DESCRIPTION	INSTALLED AT	EXAMPLES OF INSTALLATION
<b>REDUCED PRESSURE ZONE ASSEMBLIES</b> For health hazard cross-connections and continuous pressure applications.	Two independent check valves with intermediate relief valve. Supplied with shutoff valves and ball type test cocks.	All cross-connections subject to backpressure or backsiphonage where there is a potential health hazard.	Main supply lines Commercial boilers Hospital equipment Laboratory equipment Waste digesters Car washes
<b>REDUCED PRESSURE DETECTOR ASSEMBLIES</b> For health hazard cross-connections and continuous pressure applications.	RPZ backflow preventers with a water meter and RPZ in the bypass line.	Fire protection system supply main. Detects leaks and unauthorized use of water.	Fire sprinkler lines where additives or foaming agents are used.
<b>DOUBLE CHECK VALVE ASSEMBLIES</b> For non-health hazard cross-connections and continuous pressure applications.	Two independent check valves. Checks are replaceable for repair & testing.	All cross-connections subject to backpressure or backsiphonage where there is a non-health hazard.	Main supply lines Food cookers Tanks and vats Lawn sprinklers Fire sprinkler lines Commercial pools
<b>DOUBLE CHECK DETECTOR ASSEMBLIES</b> For non-health hazard cross-connections and continuous pressure applications.	Double check valve backflow preventers with water meter and double check in the bypass line.	Fire protection system supply main. Detects leaks and unauthorized use of water.	Fire sprinkler lines


# Backflow Applications (cont.)

TYPE & PURPOSE	DESCRIPTION	INSTALLED AT	EXAMPLES OF INSTALLATION
<b>DUAL CHECK VALVE BACKFLOW PREVENTERS</b> For non-health hazard cross-connections and continuous pressure applications.	Two independent check valves. Checks are replaceable for repair and testing.	Cross-connection where there is a non-health hazard.	Residential supply lines (at the meter) Residential fire sprinkler systems Post-mix beverage machines, tea and coffee machines
<b>SPECIALTY BACKFLOW PREVENTERS with INTERMEDIATE ATMOSPHERIC VENT</b> For non-health hazard cross-connections in small pipe sizes. Continuous pressure applications.	Two independent check valves with intermediate vacuum breaker and relief vent.	Cross-connection subject to backpressure or backsiphonage where there is non-health hazard. Continuous pressure. Pressure outlet to prevent backflow of carbon dioxide gas and carbonated water into the water supply system to beverage machines.	Boilers (small) Dairy equipment Post-mix carbonated beverage machine, tea and coffee machines, ice machines
<b>LABORATORY FAUCET DUAL CHECK VALVE with INTERMEDIATE VACUUM BREAKER</b> For small pipe sizes for health hazard cross-connections not subject to continuous pressure.	Two independent check valves with intermediate vacuum breaker and relief vent.	Cross-connection subject to backpressure or backsiphonage where there is a health hazard.	Laboratory faucets, pipe lines, barber shop and beauty parlor sinks
<b>ATMOSPHERIC VACUUM BREAKERS</b> For health hazard cross-connections not subject to continuous pressure – 6" above flood rim.	Single float and disc with atmospheric port.	Cross-connection not subject to backpressure or continuous pressure. Install at least 6" above fixture rim. Protection against back siphonage only.	Process tanks Dishwashers Soap dispensers Washing machines Lawn sprinklers
<b>PRESSURE VACUUM BREAKERS</b> For health hazard cross-connections. Continuous pressure applications – 12" above flood rim.	Spring-loaded float and disc with independent check. Supplied with shutoff valves and ball type test cocks.	Valve is designed for installation in a continuous pressure system 12" above the overflow level of the system being supplied. Protection against backsiphonage only.	Laboratory equipment Cooling towers Commercial laundry machines Swimming pools Chemical planting tanks Lawn sprinklers
<b>ANTI-SIPHON, SPILL-RESISTANT VACUUM BREAKERS</b> For health hazard cross-connections. Continuous pressure applications. Factory installed 1" above flood rim. Field installed 6" above flood rim.	Spill-resistant vacuum breaker with modular check and float assembly of thermoplastic. Housing bronze body.	Indoor point of use cross-connections.	Chemical dispenser Commercial dishwasher Sterilizers
<b>HOSE CONNECTION VACUUM BREAKERS</b> For residential and industrial hose supply outlets not subject to continuous pressure.	Single check with atmospheric vacuum breaker vent.	Install directly on hose bibbs, service sinks and wall hydrants. Not for continuous pressure.	Hose bibbs Service sinks Hydrants
<b>ENCLOSURES</b> To protect backflow preventers installed outdoors from vandalism and cold temperatures.	Aluminum or fiberglass structures used to protect meters, valves, and backflow preventers from vandalism and freeze damage.	Backflow preventer location.	Irrigation systems and domestic service line connections.


# Series 757, 757N

## Double Check Valve Assemblies

Sizes: 2½" – 10" (65 – 250mm)

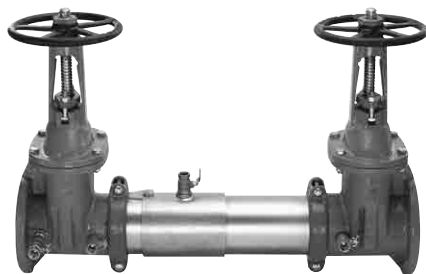

757 OSY

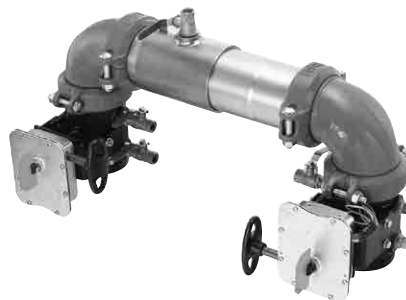

757N BFG



757 OSY (Vertical)

### Features

- Extremely compact design
- 70% Lighter than traditional designs
- 304 (Schedule 40) Stainless steel housing & sleeve
- Groove fittings allow integral pipeline adjustment
- Patented tri-link check provides lowest pressure loss
- Unmatched ease of serviceability
- Available with grooved butterfly valve shutoffs
- Available for horizontal, vertical or N pattern installations
- Replaceable check disc rubber
- Sizes 2½", 3" and 4" (65, 80 and 100mm) available with quarter-turn ball valve shutoffs

### Pressure-Temperature

Temperature Range: 33°F – 140°F  
(0.5°C – 60°C)  
Maximum Working Pressure: 175psi  
(12.1 bar)

### 757, 757N

#### LEAD FREE

Series 757, 757N Double Check Valve Assemblies are used to prevent backflow of non-health hazard pollutants that are objectionable but not toxic, from entering the potable water supply system. Series 757, 757N may be installed under continuous pressure service and may be subjected to backpressure and backsiphonage. Series 757, 757N consists of two independently operating check valves, two shutoff valves, and four test cocks.

### Materials

- Housing & Sleeve: 304 (Schedule 40) Stainless Steel
- Elastomers: EPDM, Silicone and Buna-N
- Tri-link Checks: Noryl®, Stainless Steel
- Check Discs: Reversible Silicone or EPDM
- Test Cocks: Bronze Body Nickel Plated
- Pins & Fasteners: 300 Series Stainless Steel
- Springs: Stainless Steel

### Models

#### Suffix:

**NRS** – non-rising stem resilient seated gate valves

**OSY** – UL/FM outside stem and yoke, resilient seated gate valves

**BFG** – UL/FM grooved gear operated butterfly valves with tamper switch

**QT** – 2½", 3" and 4" (65, 80 and 100mm) quarter-turn ball valves

**\*\*OSY FxG** – Flanged inlet gate connection and grooved outlet gate connection

**\*\*OSY GxF** – Grooved inlet gate connection and flanged outlet gate connection

**\*\*OSY GxG** – Grooved inlet gate connection and grooved outlet gate connection

Available with grooved NRS gate valves

- consult factory\*\*

Post indicator plate and operating nut available - consult factory\*\*

\*\*Consult factory for dimensions


### Approvals



\*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.




## Dimensions — Weights

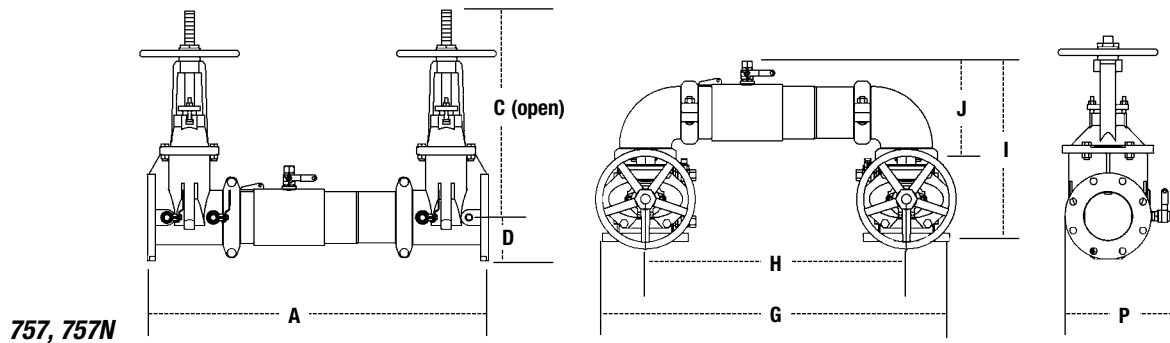


**757, 757N**

SIZE		DIMENSIONS										WEIGHT			
	A	C (OSY)	C (NRS)	D	G	H	I	J	P	757NRS	757OSY	757N NRS	757N OSY		
<i>in.</i>	<i>in.</i> <i>mm</i>	<i>in.</i> <i>mm</i>	<i>in.</i> <i>mm</i>	<i>in.</i> <i>mm</i>	<i>in.</i> <i>mm</i>	<i>in.</i> <i>mm</i>	<i>in.</i> <i>mm</i>	<i>in.</i> <i>mm</i>	<i>in.</i> <i>mm</i>	<i>in.</i> <i>mm</i>	<i>lbs.</i> <i>kgs.</i>	<i>lbs.</i> <i>kgs.</i>	<i>lbs.</i> <i>kgs.</i>	<i>lbs.</i> <i>kgs.</i>	
2½	31   787	16⅜   416	9⅝   238	3½   89	29⅞ <sub>16</sub> 738	22   559	15½   393	8 <sup>13</sup> / <sub>16</sub> 223	9 <sup>3</sup> / <sub>16</sub> 234	115   52	125   57	123   56	133   60		
3	31 <sup>11</sup> / <sub>16</sub> 805	18⅞   479	10¼   260	3 <sup>11</sup> / <sub>16</sub> 94	30¼   768	22¾   578	17⅞   435	9 <sup>3</sup> / <sub>16</sub> 233	10½   267	131   59	145   66	144   65	158   72		
4	33½   851	22¾   578	12 <sup>3</sup> / <sub>16</sub> 310	4   102	33   838	24   610	18½   470	9 <sup>15</sup> / <sub>16</sub> 252	11 <sup>3</sup> / <sub>16</sub> 284	161   73	161   73	184   83	184   83		
6	44   1105	30⅞   765	16   406	5½   140	44¾   1137	33¾   857	23 <sup>3</sup> / <sub>16</sub> 589	13 <sup>1</sup> / <sub>16</sub> 332	15   381	273   124	295   134	314   142	336   152		
8	50   1270	37¾   959	19 <sup>5</sup> / <sub>16</sub> 506	6 <sup>11</sup> / <sub>16</sub> 170	54⅞   1375	40⅝   1032	27 <sup>7</sup> / <sub>16</sub> 697	15 <sup>11</sup> / <sub>16</sub> 399	17 <sup>3</sup> / <sub>16</sub> 437	438   199	480   218	513   233	555   252		
10	57½   1461	45¾   1162	23 <sup>3</sup> / <sub>16</sub> 605	8 <sup>3</sup> / <sub>16</sub> 208	66   1676	50   1270	32½   826	17 <sup>7</sup> / <sub>16</sub> 440	20   508	721   327	781   354	891   404	951   431		

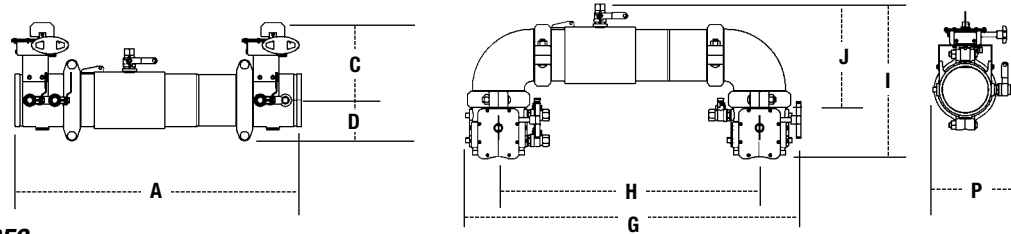

**757BFG, 757NBFG**

SIZE		DIMENSIONS										WEIGHT								
	A		C		D		G		H		I		J		P		757BFG		757N BFG	
<i>in.</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>lbs.</i>	<i>kgs.</i>	<i>lbs.</i>	<i>kgs.</i>
2½	28	711	8	203	3½	89	29⅞	759	22	559	14⅞	379	8⅜	223	9	229	56	25	64	29
3	28½	724	8⅝	211	3⅞	94	30⅞	779	22¾	578	15⅞	392	9⅞	233	9½	241	54	24	67	30
4	29⅞	741	8⅞	227	3⅞	94	31⅞	811	24	610	16¼	412	9⅞	252	10	254	61	28	84	38
6	36½	927	10	254	5	127	43⅞	1097	33¾	857	19⅞	500	13⅞	332	10½	267	117	53	157	71
8	43	1092	12¼	311	6½	165	51⅞	1297	40⅞	1032	23⅞	592	15⅞	399	14⅞	361	261	118	337	153

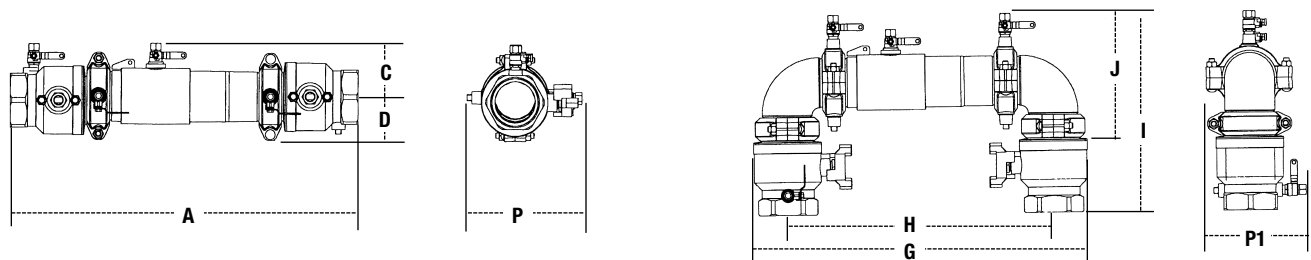


**757QT**

SIZE		DIMENSIONS										WEIGHT			
	A	C	D	G	H	I	J	P	P1	QT	QTN				
<i>in.</i>	<i>in.</i> <i>mm</i>	<i>in.</i> <i>mm</i>	<i>in.</i> <i>mm</i>	<i>in.</i> <i>mm</i>	<i>in.</i> <i>mm</i>	<i>in.</i> <i>mm</i>	<i>in.</i> <i>mm</i>	<i>in.</i> <i>mm</i>	<i>in.</i> <i>mm</i>	<i>in.</i> <i>mm</i>	<i>lbs.</i> <i>kgs.</i>	<i>lbs.</i> <i>kgs.</i>			
2½	27¼ 692	4⅞ 124	6⅞ 175	30¼ 768	24½ 622	16⅛ 407	11⅜ 289	11⅝ 287	11⅝ 287	40 18	50 23				
3	28¼ 718	4⅞ 124	6⅞ 175	30¼ 768	24½ 622	16⅞ 420	11⅜ 289	11⅝ 287	11⅝ 287	50 23	60 27				
4	31½ 800	4⅞ 124	6⅞ 175	30¼ 768	24½ 622	18⅞ 465	11⅜ 289	11⅝ 287	11⅝ 287	70 32	80 36				

# Series LF709

## Double Check Valve Assemblies

Sizes: 2½" – 10" (65 – 250mm)

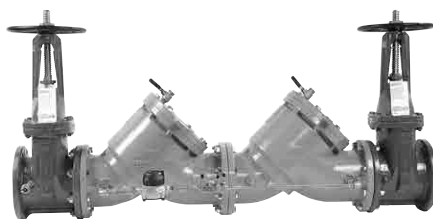

LF709

### Features

- Replaceable stainless steel seats
- Maximum flow at low pressure drop
- Design simplicity for easy maintenance
- No special tools required for servicing
- Captured spring assemblies for safety
- Approved for vertical flow up installation

### Pressure-Temperature

Temperatures Range: 33°F – 110°F  
(0.5°C – 43°C) continuous,  
140°F (60°C) intermittent  
Maximum Working Pressure: 175psi  
(12.1 bar)

### LF709

#### LEAD FREE

Series LF709 Double Check Valve Assemblies are designed to prevent the reverse flow of polluted water from entering into the potable water system. This series can be applied, where approved by the local authority having jurisdiction, on non-health hazard installations. Series LF709 features a modular check design concept to facilitate easy maintenance. Check with local jurisdictional authority as to installation requirements. The LF709 features Lead Free\* construction to comply with Lead Free\* installation requirements.

### Materials

- Check Valve Bodies: Epoxy coated cast iron
- Seats: Stainless Steel

### Models

#### Suffix:

**NRS** – non-rising stem resilient seated gate valves

**OSY** – UL/FM outside stem and yoke resilient seated gate valves

**S-FDA** – FDA epoxy coated strainer

**QT-FDA** – FDA epoxy coated ball valve shutoffs

**LF** – without shutoff valves

### Approvals




Approved by the Foundation for Cross-Connection Control and Hydraulic Research at the University of Southern California. Sizes 4" – 10" approved horizontal and vertical "flow up". Size 2½" and 3" approved horizontal only. Factory Mutual approved 4" – 10" vertical "flow up" with OSY gate valves only.

**Note: Model "S-FDA" not listed**

\*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.



Dimensions — Weights

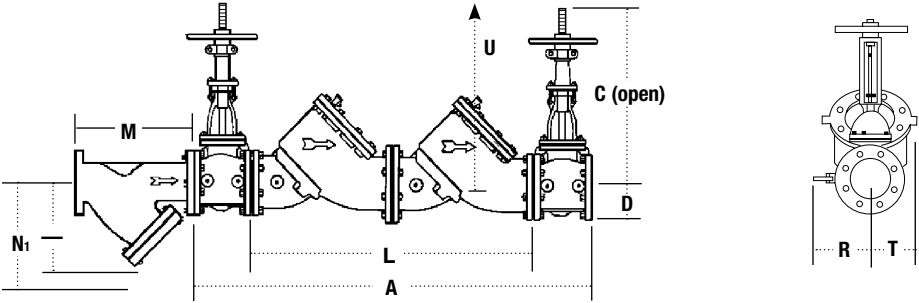

1

Double Check Valve Assemblies

LF709

SIZE			DIMENSIONS													
	A		C (OSY)		C (NRS)		D		L		U††		M		N	
<i>in.</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>
2½	39¾	1000	16¾	416	9¾	238	3½	89	24⅞	613	11	279	10	254	6½	165
3	40¾	1025	18¾	479	10¼	260	3¾	95	24⅞	613	14	356	10⅞	257	7	178
4	52¾	1330	22¾	578	12¾ <sub>16</sub>	310	4½	114	34⅞	867	14	356	12⅞	308	8¼	210
6	62⅞	1597	30⅞	765	16	406	5½	140	41⅞	1057	16	406	18½	470	13½	343
8	75	1905	37¾	959	19⅞ <sub>16</sub>	506	6½	165	52	1321	21	533	21⅞	549	15½	394
10	90	2286	45¾	1162	23⅞ <sub>16</sub>	605	8	203	64	1626	25	635	26	660	18½	470

LF709

SIZE		DIMENSIONS						WEIGHT						STRAINER		
in.	N1†		R		R❖		T		NRS		OSY		QT		Weight	
	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	kgs.	lbs.	kgs.	lbs.	kgs.	lbs.	kgs.
2½	10	254	4	102	16	406	3	76	167	76	170	77	154	70	28	13
3	10	254	5	127	16	406	3	76	167	76	170	77	162	73	34	15
4	12	305	6	152	19¾	502	6	152	368	167	383	174	275	125	60	27
6	20	508	11	279	26	660	7½	191	627	284	707	321	611	277	122	55
8	22¾	578	11¼	286	11¼	286	9	229	1201	545	1307	593	1419	644	247	112
10	28	711	12½	318	12½	318	10¼	260	2003	909	2073	940	2466	1119	370	168

†Dimension required for screen removal. ❖Quarter-turn (QT) valve dimensions.  
††Service clearance for check assembly from center.

# Series LF007 / 007

## Double Check Valve Assemblies

Sizes: ½" – 3" (15 – 80mm)

1

Double Check Valve Assemblies



LF007M3QT

### Features

- Ease of maintenance — only one cover
- Top entry
- Replaceable seats and seat discs
- Modular construction
- Compact design
- Fused epoxy coated cast iron body — 2½" – 3" (65 – 80mm)
- Low pressure drop
- No special tools required for servicing
- ½" – 1" (15 – 25mm) have tee handles

### Pressure-Temperature

#### ½" – 2" (15 – 50mm)


Temperature Range: 33°F – 180°F  
(0.5°C – 82°C).

Maximum Working Pressure: 175psi  
(12.1 bar).

#### 2½" – 3" (65 – 80mm)

Temperature Range: 33°F – 110°F  
(0.5°C – 43°C) continuous,  
140°F (60°C) intermittent.

Maximum Working Pressure: 175psi  
(12.1 bar).

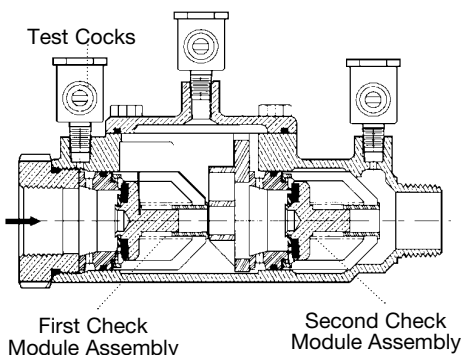

### LF007

#### LEAD FREE

Series LF007 Double Check Valve Assemblies shall be installed at referenced cross-connections to prevent the backflow of polluted water into the potable water supply. Only those cross-connections identified by local inspection authorities as non-health hazard shall be allowed the use of an approved double check valve assembly. The LF007 features Lead Free\* construction to comply with Lead Free\* installation requirements.

Check with local authority having jurisdiction regarding vertical orientation, frequency of testing or other installation requirements.

The valve shall meet the requirements of ASSE Std. 1015 and AWWA Std. C510. Approved by the Foundation for Cross-Connection Control and Hydraulic Research at the University of Southern California.

### Materials

#### Sizes: ½" – 2" (15 – 50mm)

- Lead Free\* cast copper silicon alloy body construction
- Top mounted Lead Free\* ball valve test cocks

#### Sizes: 2½" – 3" (65 – 80mm)

- Fused epoxy coated cast iron body

### Models

#### Sizes: ½" – 2" (15 – 50mm)

##### Suffix:

S – copper silicon alloy strainer

LF – without shutoff valves

##### Prefix:

U – Union connections

#### Sizes: 2½" – 3" (65 – 80mm)

##### Suffix:

NRS – non-rising stem resilient seated gate valves

OSY – UL/FM outside stem and yoke resilient seated gate valves

LF – without shutoff valves

QT-FDA – FDA epoxy coated quarter-turn ball valves

### Approvals



† ASSE, AWWA, IAPMO, CSA, UPC

▲ Approved by the Foundation for Cross-Connection Control and Hydraulic Research at the University of Southern California.

- Models with suffix LF and S are not listed.

◆ UL Classified (without shutoff valves only) ¾" – 2" (except 007M3LF)

◆ UL Classified with OSY gate valves (2½" and 3" horizontal only.)

▼ ½" - 2" models Lead Free\* with strainer  
Horizontal and vertical "flow up" approval on all sizes

\*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.

# 007

## For Use in Non-Potable Applications

Series 007 are designed to protect drinking water supplies from dangerous cross-connections in accordance with national plumbing codes and water authority requirements for non-potable service applications such as irrigation, fireline, or industrial processing.

### Materials

- Cast bronze body construction – ½" – 2" (15 – 50mm)
- Top mounted ball valve test cocks

### Models

**Sizes:** ½" – 2" (15 – 50mm)

**Suffix:**

**S** – bronze strainer

**LF** – without shutoff valves

**SH** – stainless steel ball valve handles

**HC** – 2½" inlet/outlet fire hydrant fittings (2" valve)

**Prefix:**

**U** – Union connections

**Sizes:** 2½" – 3" (65 – 80mm)

**Suffix:**

**NRS** – non-rising stem resilient seated gate valves

**OSY** – UL/FM outside stem and yoke resilient seated gate valves

**LF** – without shutoff valves

**QT-FDA** – FDA epoxy coated quarter-turn ball valves

### Approvals



† ASSE, AWWA, IAPMO, CSA, UPC


▲ Approved by the Foundation for Cross-Connection Control and Hydraulic Research at the University of Southern California.

• Models LF and S are not listed.


◆ UL Classified (LF models only) ¾" – 2" (except 007M3LF)

◆ UL Classified with OSY gate valves (2½" and 3" horizontal only.) Horizontal and vertical "flow up" approval on all sizes

### Dimensions – Weights

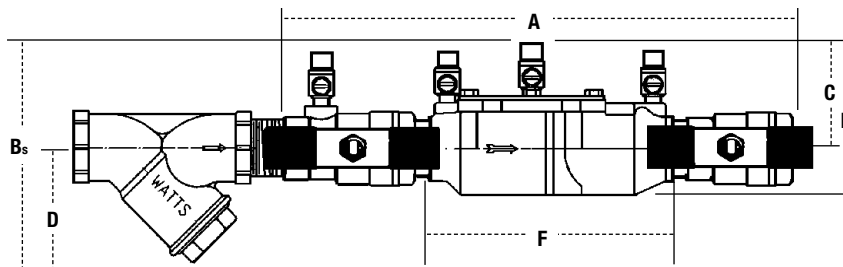

Subscript 'S' = strainer model




**LF007 / 007 (½" – 2")**

MODEL		SIZE		DIMENSIONS												WEIGHT				
		<i>in.</i>	<i>in.</i> <i>mm</i>		<i>in.</i> <i>mm</i>		<i>in.</i> <i>mm</i>		<i>in.</i> <i>mm</i>		<i>in.</i> <i>mm</i>		<i>in.</i> <i>mm</i>		<i>in.</i> <i>mm</i>		<i>lbs.</i> <i>kgs.</i>			
†▲▼ LF007QT	†▲ 007QT	½	10	254	4⅝	117	2⅞	62	—	—	5	127	3⅜	85	2⅝	59	2⅞	52	4.5	2
†▲▼ LF007M3QT	†▲ 007M3QT	¾	11⅞	282	4	102	3⅞	79	—	—	6⅜	157	3⅞	87	2⅝	54	1⅝	33	5	2.3
†▲▼ LF007M1QT	†▲ 007M1QT	1	13¼	337	5⅝	130	4	102	—	—	7½	191	3⅜	85	1⅞	43	1⅞	43	12	5.4
†▲▼ LF007M2QT	†▲ 007M2QT	1¼	16⅜	416	5	127	3⅞	84	—	—	9½	241	5	127	3	76	2	50	15	6.8
†▲▼ LF007M2QT	†▲ 007M2QT	1½	16¾	425	4⅞	124	3½	89	—	—	9¾	248	5⅜	148	3⅜	79	2⅞	68	15.9	7.2
†▲▼ LF007M1QT	†▲ 007M1QT	2	19½	495	6¼	159	4	102	—	—	13⅜	340	6⅞	156	3⅞	87	2⅞	68	25.7	11.7
●▼ LF007QT-S	● 007QT-S	½	13	330	6	152	2⅞	62	3	76	5	127	3⅜	85	2⅝	59	2⅞	52	5.5	2.5
●▼ LF007M3QT-S	● 007M3QT-S	¾	14½	368	6⅞	156	3⅞	79	3	76	6⅜	157	3⅞	87	2⅝	54	1⅝	33	6.7	3.1
●▼ LF007M1QT-S	● 007M1QT-S	1	17⅝	457	7¾	197	4	102	3¼	83	7½	191	3⅜	85	1⅞	43	1⅞	43	14	6.4
●▼ LF007M2QT-S	● 007M2QT-S	1¼	21½	546	7⅞	179	3⅞	84	3½	83	9½	241	5	127	3	76	2	50	19	8.6
●▼ LF007M2QT-S	● 007M2QT-S	1½	25⅞	637	7⅞	179	3½	89	3¾	95	9¾	248	5⅜	148	3⅜	79	2⅞	68	19.6	8.9
●▼ LF007M1QT-S	● 007M1QT-S	2	27¼	692	8¾	222	4	102	4	102	13⅜	340	6⅞	156	3⅞	87	2⅞	68	33.5	15.2

cont.

## Dimensions – Weights continued


Sizes: 2½" – 3" (65 – 80mm)

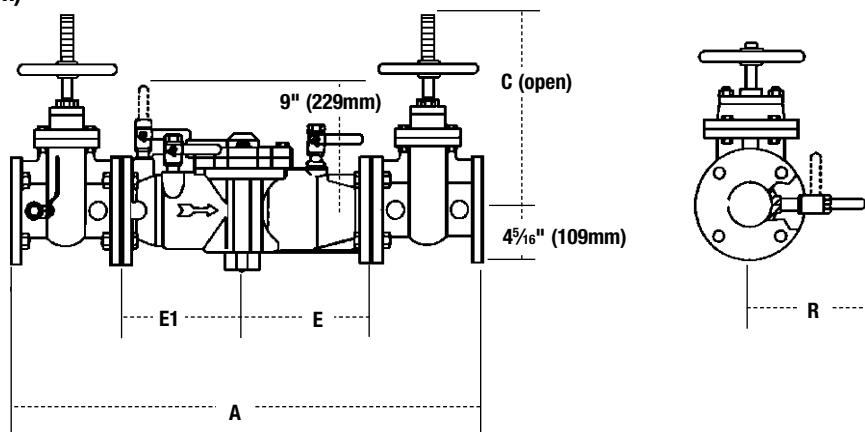

### LF007

MODEL		SIZE	DIMENSIONS						WEIGHT	
		in.	A		B		E, E1		R	
			in.	mm	in.	mm	in.	mm	in.	mm
LF007QT-FDA	007QT-FDA	2½	33⅜	841	6⅞	162	9⅞	230	8¾	222
▲ LF007-NRS	007-NRS	2½	33⅜	841	9⅞	238	9⅞	230	8¾	222
▲ LF007-OSY	007-OSY	2½	33⅜	841	16⅞	416	9⅞	230	8¾	222
LF007-QT-FDA	007-QT-FDA	3	33⅜	867	6⅞	162	9⅞	230	8¾	222
▲ LF007-NRS	007-NRS	3	33⅜	867	10¼	260	9⅞	230	8¾	222
▲ LF007-OSY	007-OSY	3	33⅜	867	18⅞	479	9⅞	230	8¾	222

Sizes: ½" – 2" (15 – 50mm)

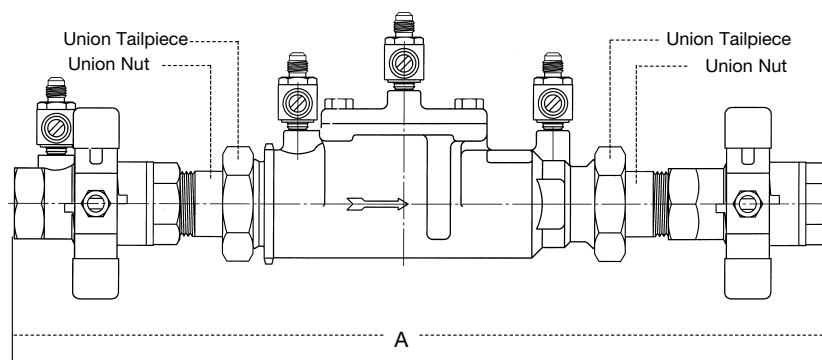


### LFU007 / U007

MODEL		SIZE	DIMENSIONS	
		in.	A	
			in.	mm
LFU007QT	U007QT	½	12⅜	326
LFU007M2QT	U007M2QT	¾	13⅜	350
LFU007M2QT	U007M2QT	1	16⅞	422
LFU007M2QT	U007M2QT	1¼	20¾	527
LFU007M2QT	U007M2QT	1½	21½	546
LFU007M1QT	U007M1QT	2	24½	622

# Series 774

## Double Check Valve Assemblies

Sizes: 2½" – 12" (65 – 300mm)

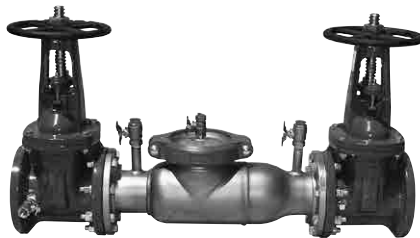


774 OSY

### Features

- Torsion spring check valve provides low head loss
- Short lay length is ideally suited for retrofit installations
- Stainless steel body is half the weight of competitive designs reducing installation and shipping cost
- Stainless steel construction provides long term corrosion protection and maximum strength
- Single top access cover with two-bolt grooved style coupling for ease of maintenance
- Thermoplastic and stainless steel check valves for trouble-free operation
- No special tools required for servicing
- Compact construction allows for smaller vaults and enclosures
- May be installed in horizontal or vertical "flow up" position

### Pressure-Temperature

Temperature Range: 33°F – 110°F  
(0.5°C – 43°C) continuous  
Maximum Working Pressure: 175psi  
(12.1 bar)

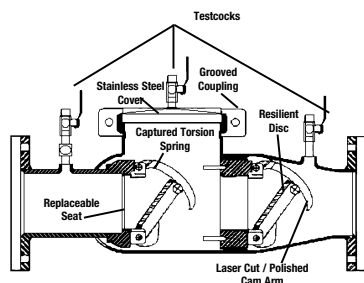

774

### 774

#### LEAD FREE

Series 774 Double Check Valve Assemblies are designed to prevent the reverse flow of polluted water from entering into the potable water system. This series can be applied, where approved by the local authority having jurisdiction, on non-health hazard installations. Features short end-to-end dimensions, light weight stainless steel body, and the lowest head loss available.

### Materials

- All internal metal parts: 300 Series stainless steel
- Main valve body: 300 Series stainless steel
- Check assembly: Noryl®
- Flange dimension in accordance with AWWA Class D

### Models

#### Suffix:

**NRS** – non-rising stem resilient seated gate valves

**OSY** – UL/FM resilient seated outside stem & yoke gate valves

**LF** – without shutoff valves

**S** – cast iron strainer

**\*\*OSY FxG** – Flanged inlet gate connection and grooved outlet gate connection

**\*\*OSY GxG** – Grooved inlet gate connection and flanged outlet gate connection

**\*\*OSY GxG** – Grooved inlet gate connection and grooved outlet gate connection

Available with grooved NRS gate valves - consult factory\*\*

Post indicator plate and operating nut available - consult factory\*\*


\*\*Consult factory for dimensions

### Approvals



For additional approvals consult factory.  
Flange dimension in accordance with AWWA Class D

\*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.

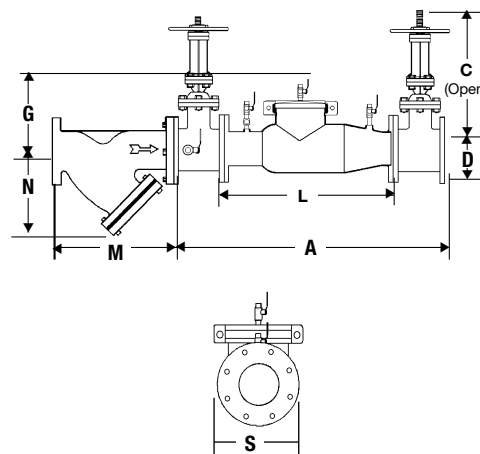

SIZE			DIMENSIONS														WEIGHT					
	A		C (open)				D		G		L		M		N		S		w/Gates		w/o Gates	
			OSY		NRS										Screen Removal							
<i>in.</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>lbs.</i>	<i>kgs.</i>	<i>lbs.</i>	<i>kgs.</i>
2½	38	965	16¾	416	9¾	238	3½	89	10	254	22	559	10	254	6½	165	7	178	140	64	53	24
3	38	965	18¾	479	10¼	260	3¾	95	15	381	22	559	10½	257	7	178	7½	191	215	98	55	25
4	40	1016	22¾	578	12¾	310	4½	114	10	254	22	559	12½	308	8¼	210	9	229	225	102	58	26
6	48½	1232	30½	765	16	406	5½	140	15	381	27½	699	18½	470	13½	343	11	279	375	170	105	48
8	52½	1334	37¾	959	19¾	506	6¾	171	15	381	29½	749	21½	549	15½	394	13½	343	561	254	169	77
10	55½	1410	45¾	1162	23¾	605	8	200	15	381	29½	749	26	660	18½	470	16	406	763	346	179	81
12	57½	1461	53¾	1349	26¾	679	9½	241	15	381	29½	749	29½	759	21¾	552	19	483	1033	469	209	95

For additional information, request literature ES-774.

See Flow Charts on p. 82

# Series LF719/719

## Double Check Valve Assemblies

Sizes: ½" – 2" (15 – 50mm)

1

Double Check Valve Assemblies




LF719QT/719QT

### Features

- Separate access, top entry check valve design
- Reversible seat disc rubber, extends check valve life
- Chloramine resistant elastomers
- Replaceable seats and seat discs
- Compact design
- Top mounted screwdriver slotted ball valve test cocks
- Low pressure drop
- ½" – 1" have Tee handles
- No special tools required for servicing
- Plastic on plastic check guiding reduces potential binding due to mineral deposits

### Pressure-Temperature

Temperature Range: 33°F – 180°F  
(0.5°C – 82°C)  
Maximum Working Pressure: 175psi  
(12.1 bar)

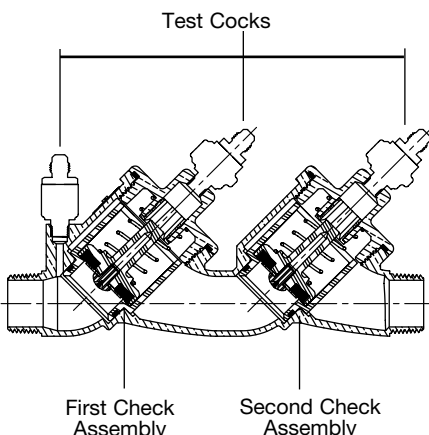

### LF719

#### LEAD FREE

Series LF719 Double Check Valve Assemblies are designed to protect drinking water supplies from dangerous cross connections in accordance with national plumbing codes and water authority requirements.

This series may be used in only those cross-connections identified by local inspection authorities as non-health hazard applications. Check with local authority having jurisdiction regarding vertical orientation, frequency of testing or other installation requirements. The LF719 features Lead Free\* construction to comply with Lead Free\* installation requirements. Series LF719 meets the requirements of ASSE Std. 1015 and AWWA Std. C510.

### Materials


- Body: Lead Free\* cast copper silicon alloy
- Elastomers: Chloramine resistant silicone and EPDM
- Check seats: PPO
- Disc Holder: PPO

### Models

#### Suffix:

S – bronze strainer  
QT – quarter-turn ball valves

### Approvals



Approved by the Foundation for Cross-Connection Control and Hydraulic Research at the University of Southern California

\*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.

## 719

### For Use in Non-Potable Applications

Series 719 Double Check Valve Assemblies are designed to protect drinking water supplies from dangerous cross-connections in accordance with national plumbing codes and water authority requirements for non-potable service applications such as irrigation, fireline, or industrial processing.

### Materials

- Body: Bronze
- Elastomers: Chloramine resistant silicone and EPDM
- Check seats: Engineered Plastic
- Disc Holder: Engineered Plastic

### Models

#### Suffix:

S – bronze strainer  
LF – without shutoff valves  
SH – stainless steel ball valve handles  
HC – 2½" inlet/outlet fire hydrant fittings (2" valve)  
QT – quarter-turn ball valves

### Approvals



Approved by the Foundation for Cross-Connection Control and Hydraulic Research at the University of Southern California

C&T – testcock caps and tethers


AQT – street elbows with quarter-turn ball valves

#### Prefix:

U – union connections




## Dimensions – Weights

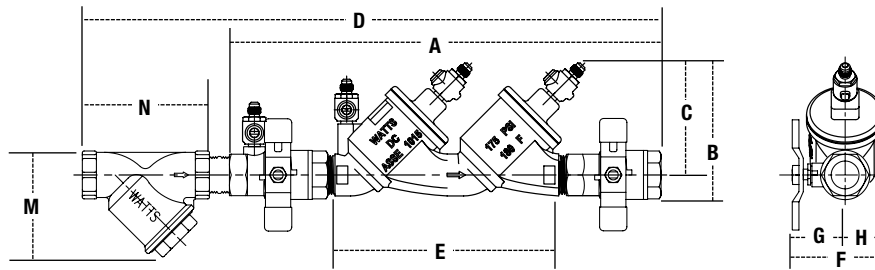


**LF719QT, LF719QT-S / 719QT, 719QT-S**

SIZE			DIMENSIONS										STRAINER				WEIGHT							
	A		B		C		D		E(LF)		F		G		H		M		N		719QT		719QT-S	
<i>in.</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>lbs.</i>	<i>kgs.</i>	<i>lbs.</i>	<i>kgs.</i>
½	9 <sup>9</sup> / <sub>16</sub>	242	3 <sup>11</sup> / <sub>16</sub>	94	2 <sup>15</sup> / <sub>16</sub>	73	12 <sup>9</sup> / <sub>16</sub>	318	5 <sup>13</sup> / <sub>16</sub>	147	2 <sup>7</sup> / <sub>16</sub>	62	1 <sup>11</sup> / <sub>16</sub>	43	¾	19	1 <sup>3</sup> / <sub>8</sub>	35	2¾	70	2.8	1.3	3.8	1.7
¾	12 <sup>1</sup> / <sub>8</sub>	307	4 <sup>1</sup> / <sub>4</sub>	108	3½	88	15 <sup>7</sup> / <sub>16</sub>	393	7 <sup>11</sup> / <sub>16</sub>	195	3 <sup>3</sup> / <sub>8</sub>	79	2 <sup>1</sup> / <sub>16</sub>	52	1 <sup>1</sup> / <sub>16</sub>	27	1 <sup>5</sup> / <sub>8</sub>	41	3 <sup>3</sup> / <sub>16</sub>	81	4.7	2.1	6.4	2.9
1	14 <sup>13</sup> / <sub>16</sub>	376	4 <sup>9</sup> / <sub>16</sub>	116	3 <sup>7</sup> / <sub>8</sub>	98	19½	495	9 <sup>5</sup> / <sub>8</sub>	244	3¾	95	2 <sup>7</sup> / <sub>16</sub>	62	1 <sup>5</sup> / <sub>16</sub>	33	2 <sup>1</sup> / <sub>8</sub>	54	3¾	95	7.4	3.4	9.4	4.3
1¼	18 <sup>15</sup> / <sub>16</sub>	480	6 <sup>1</sup> / <sub>8</sub>	156	5 <sup>1</sup> / <sub>8</sub>	129	24 <sup>1</sup> / <sub>4</sub>	610	11 <sup>11</sup> / <sub>16</sub>	297	4¼	108	2 <sup>5</sup> / <sub>8</sub>	67	1 <sup>5</sup> / <sub>8</sub>	41	2½	64	4 <sup>7</sup> / <sub>16</sub>	113	14.0	6.3	18.0	8.1
1½	18 <sup>5</sup> / <sub>16</sub>	480	6 <sup>1</sup> / <sub>8</sub>	156	5 <sup>1</sup> / <sub>8</sub>	129	25¼	640	11 <sup>11</sup> / <sub>16</sub>	297	4¾	121	3 <sup>1</sup> / <sub>8</sub>	79	1 <sup>5</sup> / <sub>8</sub>	41	3	76	4 <sup>7</sup> / <sub>8</sub>	124	16.1	7.3	19.9	9.0
2	21 <sup>3</sup> / <sub>16</sub>	538	7 <sup>1</sup> / <sub>16</sub>	179	5 <sup>5</sup> / <sub>8</sub>	142	28 <sup>15</sup> / <sub>16</sub>	735	13 <sup>3</sup> / <sub>8</sub>	340	5 <sup>3</sup> / <sub>8</sub>	137	3 <sup>7</sup> / <sub>16</sub>	87	1 <sup>15</sup> / <sub>16</sub>	49	3 <sup>3</sup> / <sub>16</sub>	90	5 <sup>15</sup> / <sub>16</sub>	151	25.7	11.6	33.4	15.2

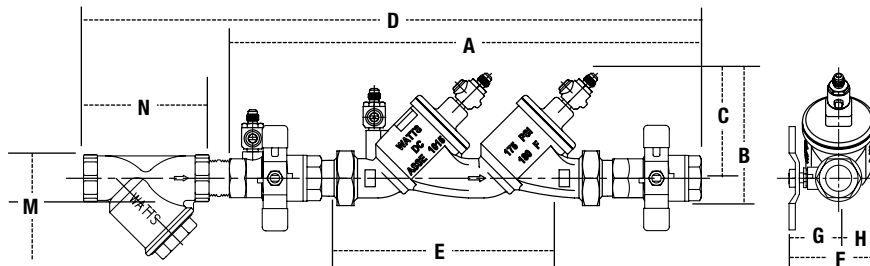

**U719QT, U719QT-S**

SIZE		DIMENSIONS										STRAINER DIMENSIONS				WEIGHT			
	A	B	C	D	E (LF)	F	G	H	M	N	U719QT	U719QT-S							
<i>in.</i>	<i>in.</i> <i>mm</i>	<i>in.</i> <i>mm</i>	<i>in.</i> <i>mm</i>	<i>in.</i> <i>mm</i>	<i>in.</i> <i>mm</i>	<i>in.</i> <i>mm</i>	<i>in.</i> <i>mm</i>	<i>in.</i> <i>mm</i>	<i>in.</i> <i>mm</i>	<i>in.</i> <i>mm</i>	<i>lbs.</i> <i>kgs.</i>	<i>lbs.</i> <i>kgs.</i>							
½	15 <sup>13</sup> / <sub>16</sub> 402	4 <sup>9</sup> / <sub>16</sub> 116	3 <sup>7</sup> / <sub>8</sub> 98	18 <sup>13</sup> / <sub>16</sub> 478	11 <sup>3</sup> / <sub>8</sub> 289	3   76	1 <sup>11</sup> / <sub>16</sub> 43	1 <sup>5</sup> / <sub>16</sub> 33	1 <sup>3</sup> / <sub>8</sub> 35	2 <sup>3</sup> / <sub>4</sub> 70	7.4   3.4	8.4   3.8							
¾	16 <sup>1</sup> / <sub>4</sub> 412	4 <sup>9</sup> / <sub>16</sub> 116	3 <sup>7</sup> / <sub>8</sub> 98	19 <sup>9</sup> / <sub>8</sub> 498	11 <sup>5</sup> / <sub>16</sub> 287	3 <sup>3</sup> / <sub>8</sub> 86	2 <sup>1</sup> / <sub>16</sub> 52	1 <sup>5</sup> / <sub>16</sub> 33	1 <sup>5</sup> / <sub>8</sub> 41	3 <sup>3</sup> / <sub>16</sub> 81	7.9   3.6	9.7   4.4							
1	17 <sup>5</sup> / <sub>16</sub> 439	4 <sup>9</sup> / <sub>16</sub> 116	3 <sup>7</sup> / <sub>8</sub> 98	22   558	11 <sup>3</sup> / <sub>4</sub> 297	3 <sup>3</sup> / <sub>4</sub> 95	2 <sup>7</sup> / <sub>16</sub> 62	1 <sup>5</sup> / <sub>16</sub> 33	2 <sup>1</sup> / <sub>8</sub> 54	3 <sup>3</sup> / <sub>4</sub> 95	8.9   4.0	10.9   5.0							
1¼	20 <sup>7</sup> / <sub>8</sub> 530	6 <sup>1</sup> / <sub>8</sub> 156	5 <sup>1</sup> / <sub>8</sub> 129	26   660	15 <sup>3</sup> / <sub>8</sub> 390	4 <sup>1</sup> / <sub>4</sub> 108	2 <sup>5</sup> / <sub>8</sub> 67	1 <sup>5</sup> / <sub>8</sub> 41	2½   64	4 <sup>7</sup> / <sub>16</sub> 113	17.6   8.0	21.6   9.8							
1½	21 <sup>9</sup> / <sub>16</sub> 547	6 <sup>1</sup> / <sub>8</sub> 156	5 <sup>1</sup> / <sub>8</sub> 129	27 <sup>7</sup> / <sub>8</sub> 708	15 <sup>3</sup> / <sub>8</sub> 390	4¾   121	3 <sup>1</sup> / <sub>8</sub> 79	1 <sup>5</sup> / <sub>8</sub> 41	3   76	4 <sup>7</sup> / <sub>8</sub> 124	19.8   9.0	23.5   10.7							
2	24 <sup>1</sup> / <sub>16</sub> 621	7 <sup>1</sup> / <sub>16</sub> 179	5 <sup>5</sup> / <sub>8</sub> 142	32 <sup>3</sup> / <sub>16</sub> 817	16¾   425	5 <sup>3</sup> / <sub>8</sub> 137	3 <sup>7</sup> / <sub>16</sub> 87	1 <sup>15</sup> / <sub>16</sub> 49	3 <sup>9</sup> / <sub>16</sub> 90	5 <sup>15</sup> / <sub>16</sub> 151	30.0   13.6	37.7   17.1							

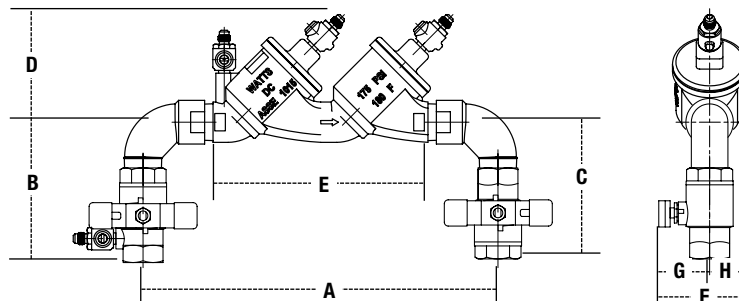


**719AQT**

SIZE			DIMENSIONS												WEIGHT			
	A		B		C		D		E (LF)		F		G		H			
<i>in.</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>lbs.</i>	<i>kgs.</i>
½	7 7⁄8	200	3 5⁄16	84	2 15⁄16	73	2 15⁄16	73	5 13⁄16	147	2 7⁄16	62	1 11⁄16	43	¾	19	3.4	1.5
¾	13 7⁄16	340	4 13⁄16	121	4 9⁄16	116	3½	98	7 11⁄16	195	3 ⅛	79	2 1⁄16	52	1 1⁄16	27	5.7	2.6
1	12 11⁄16	322	5	127	4 ¾	110	3 ¾	98	9 5⁄8	244	3 ¾	95	2 7⁄16	62	1 5⁄16	33	8.9	4.0
1¼	15 3⁄16	386	5 11⁄16	144	5 11⁄16	144	5 ⅝	129	11 11⁄16	297	4 ¼	108	2 5⁄8	67	1 5⁄8	41	15.7	7.1
1½	15 13⁄16	401	6 3⁄16	156	6 3⁄16	156	5 ⅝	129	11 11⁄16	297	4 ¾	121	3 ⅛	79	1 5⁄8	41	18.4	8.3
2	17 3⁄8	441	6 5⁄8	168	6 9⁄16	167	5 5⁄8	142	13 3⁄8	340	5 3⁄8	137	3 7⁄16	87	1 15⁄16	49	29.0	13.1

# Series LF757DCDA / 757DCDA / 757NDCDA / LF757NDCDA

## Double Check Detector Assemblies

Sizes: 2½" – 10" (65 – 250mm)

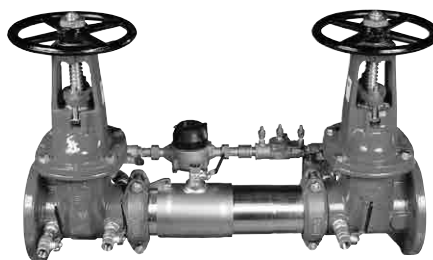

LF757DCDA



757NDCDA0SY

### Features

- Extremely compact design
- 70% lighter than traditional designs
- 304 (Schedule 40) stainless steel housing & sleeve
- Groove fittings allow integral pipeline adjustment
- Unmatched ease of serviceability
- Available with grooved butterfly valve shutoffs
- May be used for horizontal, vertical or N pattern installations
- Replaceable check disc rubber

### Pressure-Temperature

Temperature Range: 33°F – 140°F  
(0.5°C – 60°C)

Maximum Working Pressure: 175psi  
(12.1 bar)

### Models

#### Suffix:

- OSY** – UL/FM outside stem and yoke resilient seated gate valves
- BFG** – UL/FM grooved gear operated butterfly valves with tamper switch
- \*\*OSY FxG** – Flanged inlet gate connection and grooved outlet gate connection
- \*\*OSY GxG** – Grooved inlet gate connection and flanged outlet gate connection
- \*\*OSY GxG** – Grooved inlet gate connection and grooved outlet gate connection

### LF757DCDA / LFN757DCDA

#### LEAD FREE

Series LF757DCDA Double Check Detector Assemblies are used to prevent backflow of non-health hazard pollutants that are objectionable but not toxic, from entering the potable water supply system. The LF757DCDA may be installed under continuous pressure service and may be subjected to backpressure and backsiphonage. Series LF757DCDA is used primarily on fire line sprinkler systems when it is necessary to monitor unauthorized use of water.

### Materials

- Housing & Sleeve: 304 (Schedule 40) Stainless Steel
- Elastomers: EPDM, Silicone and Buna-N
- Tri-link Checks: Noryl®, Stainless Steel
- Check Discs: Reversible Silicone or EPDM
- Test Cocks: Bronze Body Nickel Plated
- Pins & Fasteners: 300 Series Stainless Steel
- Springs: Stainless Steel

### Approvals



\*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.

### 757DCDA/757NDCDA

#### For Use in Non-Potable Applications


Series 757DCDA, 757NDCDA Double Check Detector Assemblies are designed to prevent backflow on non-health hazard pollutants that are objectionable but not toxic to protect drinking water supplies from dangerous cross-connections in accordance with national plumbing codes and water authority requirements for non-potable service applications such as irrigation, fireline, or industrial processing.

### Materials

- Housing & Sleeve: 304 (Schedule 40) Stainless Steel
- Elastomers: EPDM, Silicone and Buna-N
- Tri-link Checks: Noryl®, Stainless Steel
- Check Discs: Reversible Silicone or EPDM
- Test Cocks: Bronze Body Nickel Plated
- Pins & Fasteners: 300 Series Stainless Steel
- Springs: Stainless Steel


### Approvals



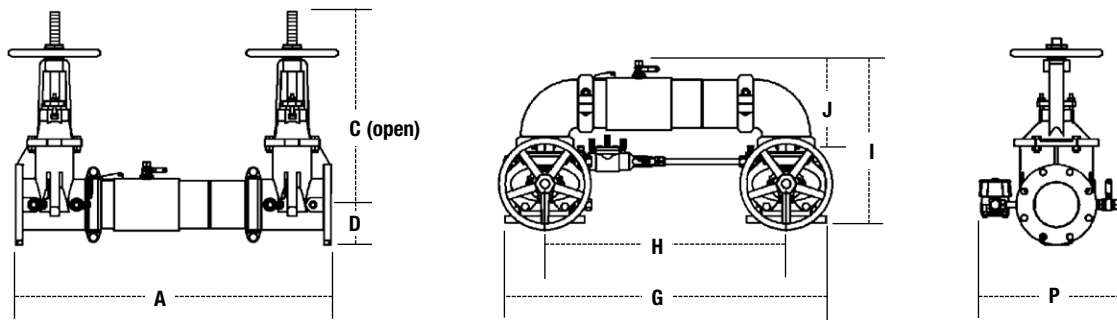

LF757DCDA, LF757NDCDA / 757DCDA , 757NDCDA

SIZE		DIMENSIONS														WEIGHT				
	A		C (OSY)		D		G		H		I		J		P		757DCDA/ LF757DCDA		757NDCDA/ LF757DCDA	
<i>in.</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>lbs.</i>	<i>kgs.</i>	<i>lbs.</i>	<i>kgs.</i>
2½	31	787	16⅞	416	3½	89	29⅞	738	21½	546	15½	393	8⅜	223	13⅜	335	139	63	147	67
3	31⅞	805	18⅞	479	3⅞	94	30¼	768	22¼	565	17⅞	435	9⅜	233	14½	368	159	72	172	78
4	33½	851	22¾	578	4	102	33	838	23½	597	18½	470	9⅞	252	15⅜	386	175	79	198	90
6	44	1118	30⅞	765	5½	140	44¾	1137	33¾	857	23⅞	589	13⅞	332	19	483	309	140	350	159
8	50	1270	37¾	959	6⅞	170	54⅞	1375	40⅝	1032	27⅞	697	15⅞	399	21⅜	538	494	224	569	258
10	57½	1461	45¾	1162	8⅞	208	66	1676	50	1270	32½	826	17⅞	440	24	610	795	361	965	438

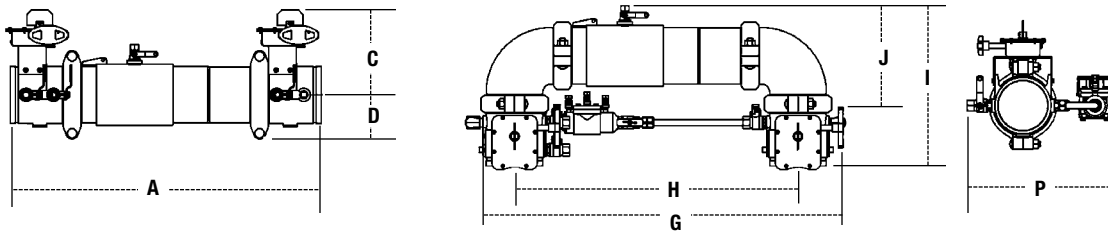


LF757DCDABFG, LF757NDCDABFG / 757DCDABFG , 757NDCDABFG

SIZE		DIMENSIONS														WEIGHT				
	A		C		D		G		H		I		J		P		757DCDABFG LF757DCDABFG		757NDCDA BFG LF757NDCDA BFG	
<i>in.</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>lbs.</i>	<i>kgs.</i>	<i>lbs.</i>	<i>kgs.</i>
2½	27½	698	8	203	3½	89	29⅞	759	21½	546	14⅞ <sup>16</sup>	379	8⅜ <sup>16</sup>	223	13	330	70	32	78	35
3	28	711	8⅞ <sup>16</sup>	211	3⅞ <sup>16</sup>	94	30⅞ <sup>16</sup>	779	22¼	565	15⅞ <sup>16</sup>	392	9⅞ <sup>16</sup>	233	13½	343	68	31	81	37
4	28¾	730	8⅞ <sup>16</sup>	227	3⅞ <sup>16</sup>	94	31⅞ <sup>16</sup>	811	23½	597	16¼	412	9⅞ <sup>16</sup>	252	14	356	75	34	98	44
6	37	940	10	254	5	127	43⅞ <sup>16</sup>	1097	33¾	857	19⅞ <sup>16</sup>	500	13⅞ <sup>16</sup>	332	14½	368	131	59	171	78
8	43½	1105	12¼	311	6½	165	51⅞ <sup>16</sup>	1297	40⅞	1032	23⅞ <sup>16</sup>	592	15⅞ <sup>16</sup>	399	18⅞ <sup>16</sup>	462	275	125	351	159

# Series 774DCDA

## Double Check Detector Assemblies

Sizes: 2½" – 12" (65 – 300mm)

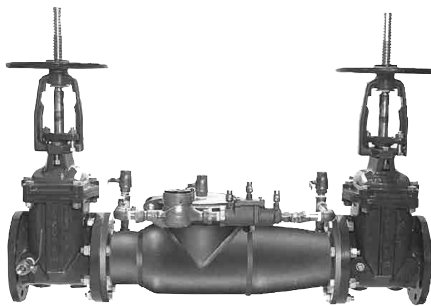


774DCDA0SY

### Features

- Torsion spring check valve provides low head loss
- Short lay length is ideally suited for retrofit installations
- Stainless steel body is half the weight of competitive designs reducing installation and shipping cost
- Stainless steel construction provides long term corrosion protection and maximum strength
- Single top access cover with two-bolt grooved style coupling for ease of maintenance
- Thermoplastic and stainless steel check valves for trouble-free operation
- No special tools required for servicing
- Compact construction allows for smaller vaults and enclosures
- Furnished with 5/8" x 3/4" bronze meter (gpm or cfm)
- Detects underground leaks and unauthorized water use
- May be installed horizontal or vertical "flow up" position

### Pressure-Temperature

Temperature Range: 33°F – 110°F  
(0.5°C – 43°C) continuous  
Pressure Range: 175psi  
(12.1 bar)

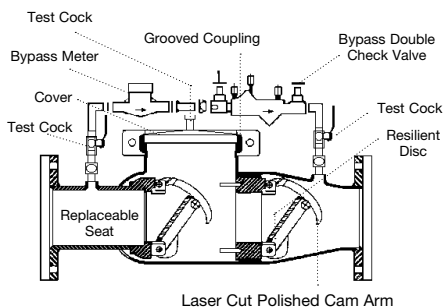

### 774DCDA

Series 774DCDA Double Check Detector Assemblies are designed to protect drinking water supplies from non-health hazard dangerous cross-connections in accordance with national plumbing codes and water authority requirements for non-potable service applications such as irrigation, fireline, or industrial processing.

### Materials

- All internal metal parts: 300 Series stainless steel
- Main valve body: 300 Series stainless steel
- Check assembly: Noryl® Flange dimensions in accordance with AWWA Class D.

### Approvals



(2½" - 10" only)

### Models

#### Suffix:

**LF** – without shutoff valves

**OSY** – UL/FM outside stem and yoke resilient seated gate valves

**\*OSY FxG** – flanged inlet gate connection and grooved outlet gate connection

**\*OSY GxF** – grooved inlet gate connection and flanged outlet gate connection

**\*OSY GxG** – grooved inlet gate connection and grooved outlet gate connection

**CFM** – cubic feet per minute meter


**GPM** – gallons per minute meter

Available with grooved NRS gate valves - consult factory\*

Post indicator plate and operating nut available - consult factory\*

\*Consult factory for dimensions

Dimensions — Weights

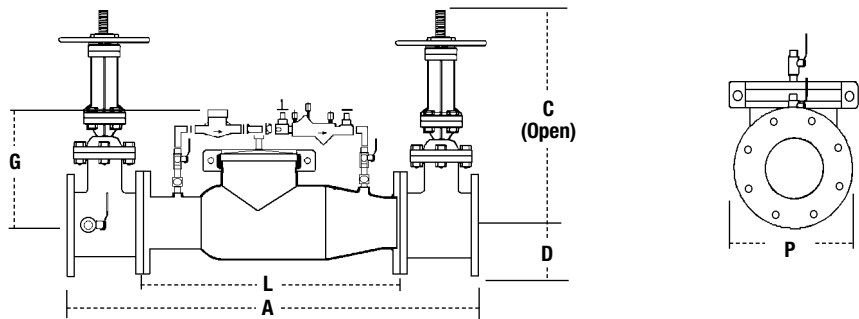


774DCDA

SIZE		DIMENSIONS										WEIGHT				
	A		C (OSY)		D		G		L		P		w/Gates		w/o Gates	
in.	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	kgs.	lbs.	kgs.
2½	38	965	16¾	416	3½	89	10	250	22	559	12½	318	155	70	68	31
3	38	965	18¾	479	3¾	95	10	250	22	559	13	330	230	104	70	32
4	40	1016	22¾	578	4½	114	10	250	22	559	14½	368	240	109	73	33
6	48½	1232	30¾	765	5½	140	15	381	27½	699	15½	394	390	177	120	54
8	52½	1334	37¾	959	6¾	171	15	381	29½	749	18¼	464	572	259	180	82
10	55½	1410	45¾	1162	8	200	15	381	29½	749	19½	495	774	351	190	86
12	57½	1461	53¾	1349	9½	241	15	381	29½	749	21	533	1044	474	220	100

# Series 709DCDA

## Double Check Detector Assemblies

Sizes: 3" – 10" (80 – 250mm)

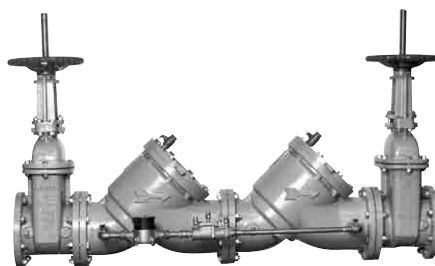

709DCDA0SY

### Features

- Body construction fused epoxy coated cast iron
- Replaceable bronze seats
- Maximum flow at low pressure drop
- Compact for economy combined with performance
- Design simplicity for easy maintenance
- Furnished with  $\frac{5}{8}$ " x  $\frac{3}{4}$ " bronze meter
- No special tools required for servicing

### Pressure-Temperature

Temperature Range: 33°F – 110°F  
(0.5°C – 43°C) continuous  
Maximum Working Pressure: 175psi  
(12.1 bar)

### 709DCDA

Series 709DCDA Double Check Detector Assemblies are designed to protect drinking water supplies from dangerous cross-connections in accordance with national plumbing codes and water authority requirements for non-potable service applications such as irrigation, fireline, or industrial processing.

**Benefits:** Detects leaks with emphasis on the cost of unaccountable water; incorporates a meter which allows the water utility to:

- detect leaks underground that historically create great annual cost due to waste.
  - provide a detection point for unauthorized use. It can help locate illegal taps.
- Modular check design concept facilitates maintenance and assembly access. All sizes are standardly equipped with resilient seated OSY shutoff valves,  $\frac{5}{8}$ " x  $\frac{3}{4}$ " meter and ball type test cocks.

### Materials

- Body: Epoxy coated cast iron
- Seat: Bronze
- Disc Holder: Bronze
- Trim: Stainless steel
- Check Valve Discs: Rubber
- Test Cocks: Bronze

### Models


#### Suffix:

**OSY** - UL/FM outside stem and yoke resilient seated gate valves  
**CFM** - cubic feet per minute meter  
**GPM** - gallons per minute meter  
**LF** - 4" – 10" without shutoff valves

### Approvals



Approved by the Foundation for Cross-Connection Control and Hydraulic Research at the University of Southern California. Sizes 4" – 10" approved for horizontal and vertical "flow up". Size 3" approved for horizontal only. Factory Mutual approved 4" – 10" vertical "flow up".

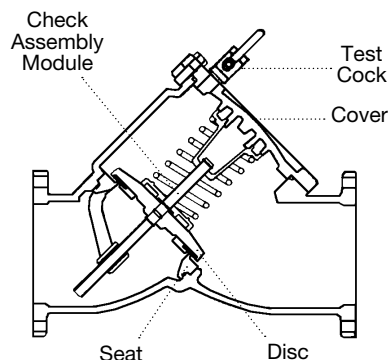



# Series 007DCDA

## Double Check Detector Assemblies

Sizes: 2½" – 3" (65 – 80mm)



007DCDA

### Features

- Fused epoxy coated cast iron unibody 2½" – 3"
- Replaceable seats
- Maximum flow at low pressure drop
- Compact for ease of installation
- Design simplicity for easy maintenance
- No special tools required for servicing
- Bronze body ball valve test cocks
- Modular spring loaded checks
- Furnished with bronze ⅝" x ¾" meter

### Pressure-Temperature

Temperature Range: 33°F – 110°F  
(0.5°C – 43°C) continuous  
Maximum Working Pressure: 175psi  
(12.1 bar)

### 007DCDA

Series 007DCDA Double Check Detector Assemblies are designed exclusively for use in accordance with water utility authority on non-health hazard containment requirements. It is mandatory to prevent the reverse flow of fire protection system substances, i.e., glycerin wetting agents, stagnant water and water of non-potable quality from being pumped or siphoned into the potable water line.

**Benefits:** Detects leaks with emphasis on the cost of unaccountable water; incorporates a meter which allows the water utility to:

- detect underground leaks that historically create great annual cost due to waste.
- provide a detection point for unauthorized use. It can help locate illegal taps.

Modular check design concept facilitates maintenance and assembly access. All sizes are standardly equipped with resilient seated OSY shutoff valves, ⅝" x ¾" meter.

### Materials

- Body: Epoxy coated cast iron
- Seats: Bronze or Stainless steel
- Discs: Silicone
- Springs: Stainless steel
- Meter: Bronze

### Models

**Suffix:**

**CFM** - cubic feet per minute meter


**GPM** - gallons per minute meter

### Approvals





Approved by the Foundation for Cross-Connection Control and Hydraulic Research at the University of Southern California. 2½" 007DCDA approved for horizontal and vertical upward flow position. 3" 007DCDA approved for horizontal only.

### Dimensions — Weights



007DCDA

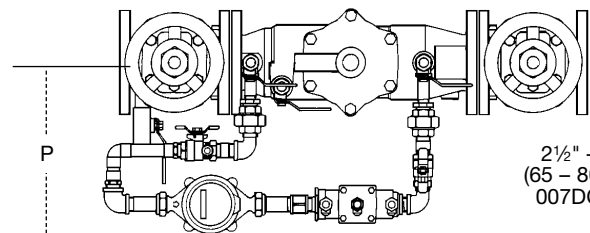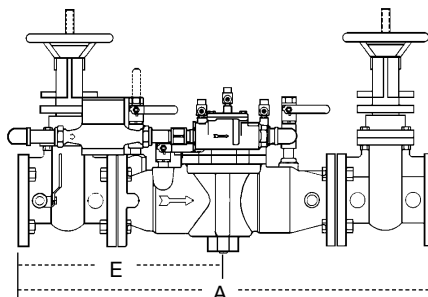

2½" – 3"  
(65 – 80mm)  
007DCDA


SIZE	DIMENSIONS						WEIGHT	
	A		C		E		P	
	in.	mm	in.	mm	in.	mm	in.	mm
2½	33¼	845	16¾	416	16¾	416	12⅝	313
3	34¼	870	18⅞	479	16⅝	422	12⅝	313
							lbs.	kgs.
							164	74
							196	89

# Series 007M1DCDA

## Residential Fire Sprinkler

## Double Check Detector Backflow Prevention Assembly

Sizes: 2" (50mm)

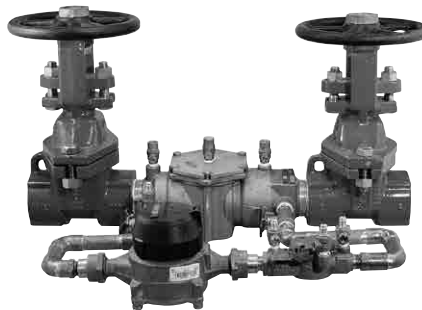

007M1DCDA-OSY-GPM

### Features

#### Main Valve

- Compact Design for Ease of Installation
- Inline Serviceable Assembly
- No Special Tools Required for Servicing
- Captured Modular Spring Loaded Checks
- Field Replaceable Seats & Discs
- Field Replaceable Auxiliary Bypass Line & Components

#### Auxiliary Bypass

- Compact Bypass Design; Remains within Main Valve Assembly Profile
- Inline Serviceable 1/2" Backflow Assembly
- No Special Tools Required for Servicing
- Captured Modular Spring Loaded Checks
- Field Replaceable Seats & Discs
- Detect Potential Underground Water Leaks
- Detect Unauthorized Water Usage

### Pressure Specification

- Max. Working Pressure: 175psi
- Min. Working Pressure: 10psi
- Hydrostatic Test Pressure: 350psi
- Hydrostatic Safety Pressure Rating: 700psi

### Temperature Specifications

- Continuous Operating Range: 33°F-110°F (0.5°C-43°C)
- Intermittent Operating Range up to 140°F (60°C)

Must not exceed 12 hour duration

### 007M1DCDA

The Model 007M1DCDA Double Check Detector Assembly is designed to protect drinking water supplies from dangerous cross-connections in accordance with national plumbing codes and water authority requirements for non-potable service applications such as irrigation, fireline, or industrial processing. Protects against backpressure and back siphonage (i.e. pollutants) in non-health hazard applications in accordance with local governing water utility code.

### Materials

- Body: Cast Bronze ASTM B584
- Elastomers: Silicone
- O-Rings: EPDM
- Check Modules: Engineered Plastics

### Configurable Options

#### (Prefix – Suffix)

#### Suffix

**OSY** – UL/FM Approved OS&Y Gate Valves (ANSI/AWWA C515 Compliant)

**CFM** – Cubic Feet per Minute 5/8"x3/4" Water Meter (ANSI/AWWA C700 Compliant)


**GPM** – Gallon per Minute 5/8"x3/4" Water Meter (ANSI/AWWA C700 Compliant)

**LF** – Less Shutoff valves; This is **NOT** an APPROVED ASSEMBLY




### Approvals



Approved by the Foundation for Cross-Connection Control and Hydraulic Research at The University of Southern California (FCCCCHR-USC)  
ASSE 1048 Listed  
UL Classified (US & Canada)  
FM Approved  
IAPMO/cUPC  
AWWA Standard C510 Compliant  
NFPA 13, 14, 15, 16, 20, 22 & 24 Compliant  
End Connections OS&Y Gate Valves – Compliant to ASME B16.1 Class 125 & AWWA Class D Flange

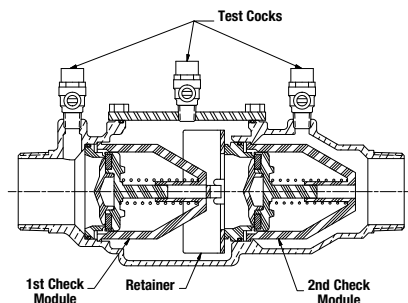

Dimensions — Weights

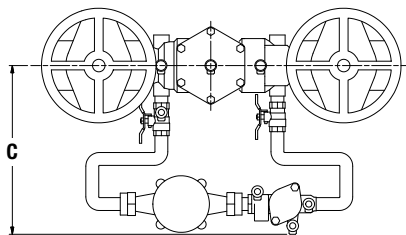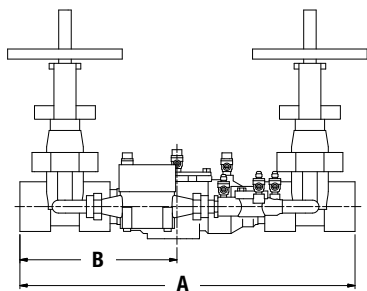


007M1DCDA

MODEL	SIZE	DIMENSIONS								WEIGHT	
		A		B		C		D			
	<i>in.</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>lbs.</i>	<i>kgs.</i>
007M1DCDA-OSY	2	22 <sup>5</sup> / <sub>8</sub>	575	10 <sup>9</sup> / <sub>16</sub>	268	11 <sup>13</sup> / <sub>16</sub>	300	13 <sup>1</sup> / <sub>2</sub>	343	85	38.6


# Series 957 / 957N / 957Z

## Reduced Pressure Zone Assemblies

Sizes: 2½" – 10" (65 – 250mm)

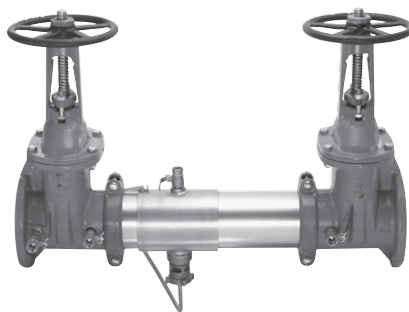

9570SY

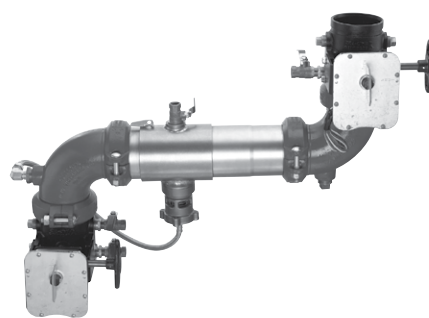

957ZBFG

### Features

- 2½", 3" and 4" sizes available with quarter-turn ball valve shutoffs
- Replaceable check disc rubber
- Extremely compact design
- 70% Lighter than traditional designs
- 304 (Schedule 40) stainless steel housing & sleeve
- Groove fittings allow integral pipeline adjustment
- Patented torsion spring checks provide lowest pressure loss
- Unmatched ease of serviceability
- Bottom mounted cast stainless steel relief valve
- Available with grooved butterfly valve shutoffs

### Pressure-Temperature

Temperature Range: 33°F – 140°F  
(0.5°C – 60°C)

Maximum Working Pressure: 175psi  
(12.1 bar)

### 957 / 957N / 957Z

#### LEAD FREE

Series 957, 957N, 957Z Reduced Pressure Zone Assemblies provide protection to the potable water system from contamination in accordance with national plumbing codes. Series 957, 957N, 957Z are normally used in health hazard applications for protection against backsiphonage or backpressure.

### Materials

- Housing & Sleeve: 304 (Schedule 40) Stainless Steel
- Elastomers: EPDM, Silicone and Buna-N
- Torsion Spring Checks: Noryl®, Stainless Steel
- Check Discs: Reversible Silicone or EPDM
- Test Cocks: Bronze Body Nickel Plated
- Pins & Fasteners: 300 Series Stainless Steel
- Springs: Stainless Steel

### Available Models

#### Suffix:

**NRS** – non-rising stem, resilient seated gate valves

**OSY** – UL/FM outside stem and yoke resilient seated gate valves

**BFG** – UL/FM grooved gear operated butterfly valves with tamper switch

**QT** – 2½" - 4" (65 - 100mm) quarter-turn ball valves

**\*\*OSY FxG** – Flanged inlet gate connection and grooved outlet gate connection

### Approvals



**\*\*OSY GxF** – Grooved inlet gate connection and flanged outlet gate connection


**\*\*OSY GxG** – Grooved inlet gate connection and grooved outlet gate connection

Available with grooved NRS gate valves - consult factory\*\*

Post indicator plate and operating nut available - consult factory\*\*

\*\*Consult factory for dimensions


## Dimensions — Weights

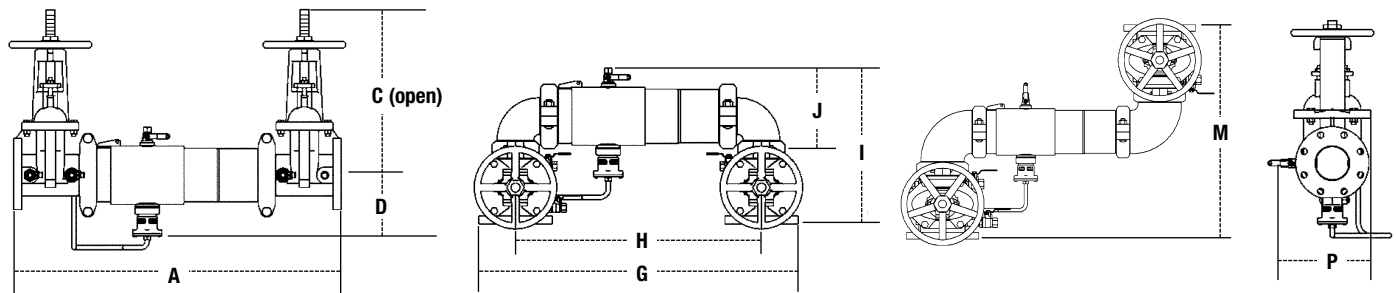


### 957

SIZE			DIMENSIONS												WEIGHT													
	A		C (OSY)		C (NRS)		D		G		H		I		J		M		P		957NRS		957OSY		957N NRS		957N OSY	
<i>in.</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>lbs.</i>	<i>kgs.</i>	<i>lbs.</i>	<i>kgs.</i>	<i>lbs.</i>	<i>kgs.</i>	<i>lbs.</i>	<i>kgs.</i>
2½	31	787	16⅝	416	9⅝	238	6½	165	29⅞	738	21½	546	15½	393	8⅜	223	21⅞	548	9⅜	234	118	54	128	58	126	57	136	62
3	31⅞	805	18⅞	479	10¼	260	6⅞	170	30¼	768	22¼	565	17⅞	435	9⅞	233	23⅞	587	10½	267	134	61	148	67	147	67	161	73
4	33½	851	22¾	578	12⅞	310	7	178	33	838	23½	597	18½	470	9⅞	252	26½	673	11⅞	284	164	74	164	74	187	85	187	85
6	44	1118	30⅞	765	16	406	8½	216	44¾	1137	33¾	857	23⅞	589	13⅞	332	32¾	832	15	381	276	125	298	135	317	144	339	154
8	50	1270	37¾	959	19⅞	506	9⅞	246	54⅞	1375	40⅞	1032	27⅞	697	15⅞	399	37⅞	943	17⅞	437	441	200	483	219	516	234	558	253
10	57½	1461	45¾	1162	23⅞	605	11⅞	285	66	1676	50	1270	32½	826	17⅞	440	46⅞	1178	20	508	723	328	783	355	893	405	950	431

### 957BFG

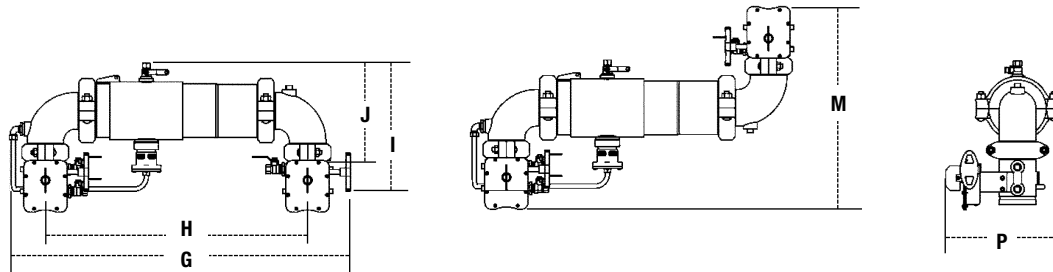

SIZE		DIMENSIONS										WEIGHT		
	G		H		I		J		M		P		957N/957Z	
<i>in.</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>lbs.</i>	<i>kgs.</i>
2½	32½	826	21½	546	15½	394	9½	241	21⅓ <sub>16</sub>	555	11⅓ <sub>16</sub>	300	67	30
3	34	864	22¼	565	16⅝ <sub>16</sub>	414	10⅞ <sub>16</sub>	256	23⅞ <sub>8</sub>	587	12⅞ <sub>8</sub>	308	70	32
4	35⅞	905	23½	597	17⅞ <sub>16</sub>	437	10⅞ <sub>16</sub>	279	24⅞ <sub>16</sub>	634	12⅞ <sub>8</sub>	321	87	39
6	46½	1181	33¾	857	20½	521	13½	343	28¼ <sub>4</sub>	718	15	382	160	73

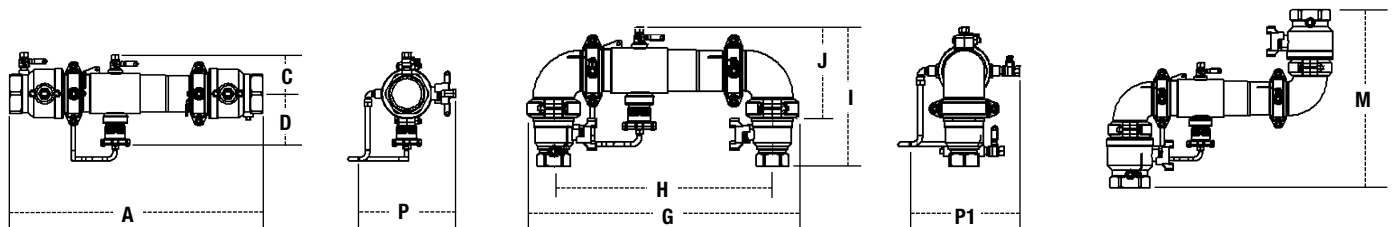


### 957QT

SIZE			DIMENSIONS										WEIGHT											
	A		C		D		G		H		I		J		M		P		P1		QT		QTN	
<i>in.</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>lbs.</i>	<i>kgs.</i>	<i>lbs.</i>	<i>kgs.</i>
2½	27½	698	4⅞	124	6⅞	175	30¼	768	21½	546	16 ⅞	407	11⅞	289	19⅞	505	11⅞	287	11⅞	287	46	21	57	26
3	28	711	4⅞	124	6⅞	175	30¼	768	22¼	565	16⅞	420	11⅞	289	20⅞	531	11⅞	287	11⅞	287	56	25	67	30
4	28¾	730	4⅞	124	6⅞	175	30¼	768	23½	597	18⅞	465	11⅞	289	24⅞	619	11⅞	287	11⅞	287	76	34	87	39

# Series 994

## Reduced Pressure Zone Assemblies

Sizes: 2½" – 10" (65 – 250mm)

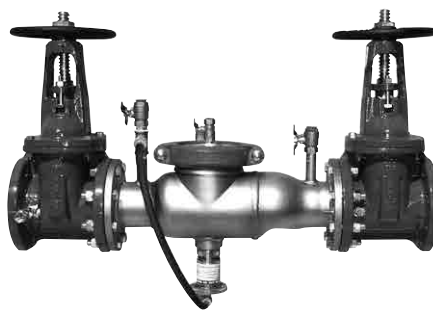

9940SY


### Features

- Stainless steel construction provides long term corrosion resistance and maximum strength
- Stainless steel body is half the weight of competitive designs reducing installation & shipping costs
- Short end-to-end dimensions makes retrofit easy
- Bottom mounted relief valve reduces clearance requirements when installed against an outside wall
- Torsion spring check valves provides maximum flow at low pressure drop
- Thermoplastic & stainless steel check valves for trouble-free operation
- No special tools required for servicing
- Compact construction allows for smaller enclosures
- Stainless steel relief valve features a balanced rolling diaphragm to eliminate sliding seals and lower maintenance costs

### Pressure-Temperature

Temperature Range: 33°F – 110°F  
(0.5°C – 43°C)

Maximum Working Pressure: 175psi  
(12.1 bar)

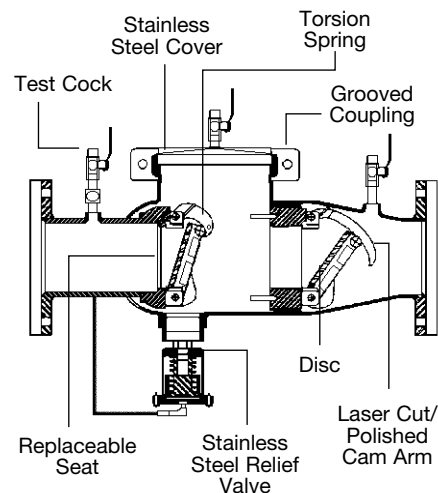

### 994

#### LEAD FREE

Series 994 Reduced Pressure Zone Assemblies are designed to provide protection of the potable water supply in accordance with national codes. This series can be used where approved by the local authority having jurisdiction on health hazard cross-connections. Series 994 features a short lay length, lightweight stainless steel body, corrosion resistant stainless steel relief valve, and patented torsion spring check valves.

### Materials

- All internal metal parts: 300 Series stainless steel
- Main valve body: 300 Series stainless steel
- Check assembly: Noryl®
- Flange dimension in accordance with AWWA Class D

### Available Models

#### Suffix:

**NRS** – non-rising stem, resilient seated gate valves

**OSY** – UL/FM outside stem and yoke resilient seated gate valves

**\*\*OSY FxG** – Flanged inlet gate connection and grooved outlet gate connection

**\*\*OSY GxF** – Grooved inlet gate connection and flanged outlet gate connection

**\*\*OSY GxG** – Grooved inlet gate connection and grooved outlet gate connection

**LF** – without shutoff valves

**S** – cast iron strainer

Available with grooved NRS gate valves - consult factory\*\*

Post indicator plate and operating nut available - consult factory\*\*

\*\*Consult factory for dimensions

Note: The installation of a drain line is recommended. When installing a drain line, a 994AGK-P air gap is necessary. See ES-AG/EL/TC for additional information.

### Approvals






Approved by the Foundation for Cross Connection Control & Hydraulic Research at the University of Southern California  
Sizes 2½" – 6"

\*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.



Dimensions — Weights

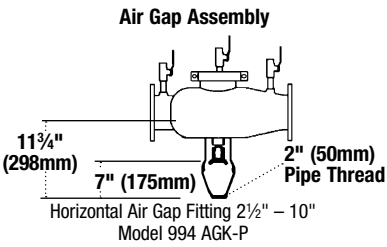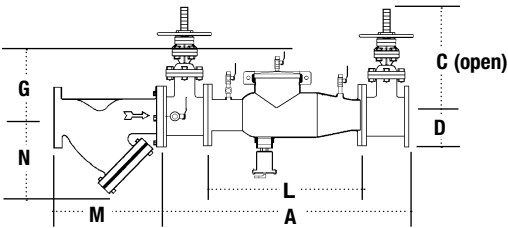


994

SIZE			DIMENSIONS																WEIGHT			
	A		C (OSY)		C (NRS)		D		G		L		M		N		P		w/Gates		w/o Gates	
<i>in.</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>lbs.</i>	<i>kgs.</i>	<i>lbs.</i>	<i>kgs.</i>
2½	37	940	16¾	416	9¾	238	10½	267	10	254	22	559	10	254	6½	165	7	178	148	67	60	27
3	38	965	18⅞	479	10¼	260	10½	267	10	254	22	559	10⅞	257	7	178	7½	191	226	103	62	28
4	40	1016	22¾	578	12⅞	310	10½	267	10	250	22	559	12⅞	308	8¼	210	9	229	235	107	65	30
6	48½	1232	30⅞	765	16	406	11½	292	15	381	27½	699	18½	470	13½	343	11	279	380	172	110	50
8	52½	1334	37¾	959	19⅟16	506	12½	318	15	381	29½	749	21⅞	549	15½	394	13½	343	571	259	179	81
10	55½	1410	45¾	1162	23⅟16	605	12½	318	15	381	29½	749	26	660	18½	470	16	406	773	351	189	86


# Series LF909

## Reduced Pressure Zone Assemblies

LF909 Sizes: 3/4", 1" (20, 22mm) / LF909M1 Sizes: 1 1/4", 1 1/2", 2" (32, 40, 50mm)

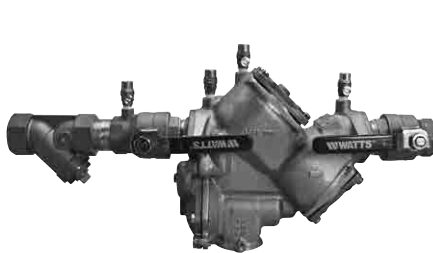

LF909

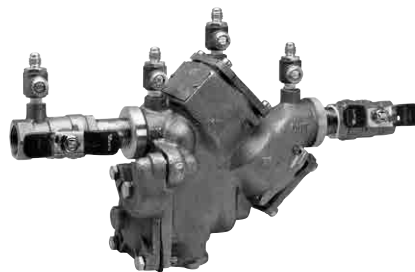

LF909QT

### Features

- Modular design
- Replaceable seats
- Compact for installation ease
- Horizontal or vertical (up or down) installation
- No special tools required for servicing

### Pressure-Temperature

Temperature Range: 33°F – 140°F  
(0.5°C – 60°C) continuous  
180°F (82°C) intermittent

Maximum Working Pressure: 175psi  
(12.1 bar)

#### Series LF909HW

Temperature Range: 33°F – 210°F  
(0.5°C – 99°C)

Maximum Working Pressure: 175psi  
(12.1 bar)

### Approvals

Listed by IAPMO  
Listed by SBCCI



‡Approved by the Foundation for Cross-Connection Control and Hydraulic Research at the University of Southern California.

Horizontal and vertical "flow-up" approval on 3/4" and 1" sizes (model LF909QT)

### LF909

#### LEAD FREE

Series LF909 Reduced Pressure Zone Assemblies are designed to provide superior cross-connection control protection of the potable water supply in accordance with national plumbing codes and containment control for water authority requirements. This series can be utilized in a variety of installations, including health hazard cross-connections in plumbing systems or for containment at the service line entrance. The LF909 features Lead Free\* construction to comply with Lead Free\* installation requirements. Model LF909QT, standardly furnished with full port, resilient seated and Lead Free\* cast copper silicon alloy ball valve shutoffs. Sizes 3/4" and 1" shutoffs have tee handles.

### Materials

- Body: Lead Free\* Cast Copper Silicon Alloy
- Check Seats: 909 Celcon®
- Relief Valve Seats: Stainless Steel 909HW
- Test Cocks: Lead Free\* Cast Copper Silicon Alloy

### Models


#### Suffix:

**QT** — Quarter-turn ball valves




**S** – Bronze strainer

**HW** –Stainless steel check modules for hot and harsh water conditions

\*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.

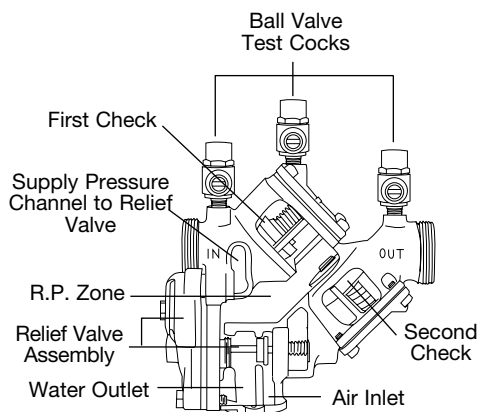

Dimensions — Weights

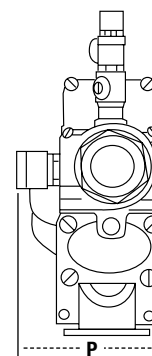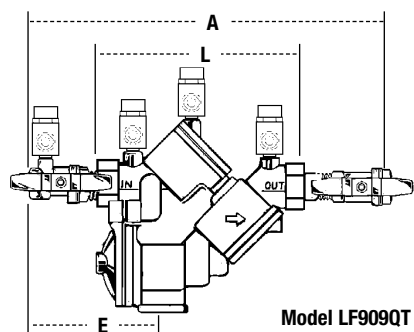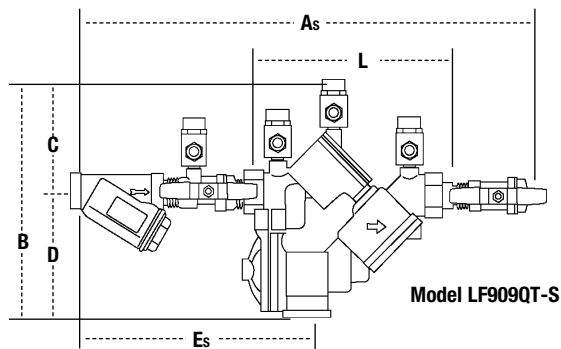

LF909QT, LF909QT-S


SIZE		DIMENSIONS														WEIGHT						
	A		As		B		C		D		E		Es		L		P		QT		QT-S	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	kgs.	lbs.	kgs.
¾"	14⅜	365	18⅞	459	8¾	222	4	102	4¾	121	6¾	171	10⅞	259	7⅞	186	3⅞	98	14	6.4	15.6	7.1
1"	15⅜	391	19⅞	498	8¾	222	4	102	4¾	121	7	178	11	279	7⅞	186	3⅞	98	15	6.8	17.5	7.9
1¼"M1	18½	470	23⅞	595	11⅞	295	5½	140	6½	165	7½	191	12⅞	310	10⅞	264	5¼	133	40	18.1	42.8	19.4
1½"M1	19	483	24⅞	619	11⅞	295	5½	140	6½	165	7½	191	12⅞	321	10⅞	264	5¼	133	40	18.1	44.0	20.0
2"M1	19½	495	25⅞	659	11⅞	295	5½	140	6½	165	7¾	197	13⅞	354	10⅞	264	5¼	133	40	18.1	47.4	21.5

Subscript 'S' = strainer model


# Series LF909

## Reduced Pressure Zone Assemblies

Sizes: 2½" – 10" (65 – 250mm)

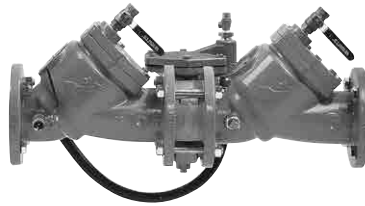

LF909

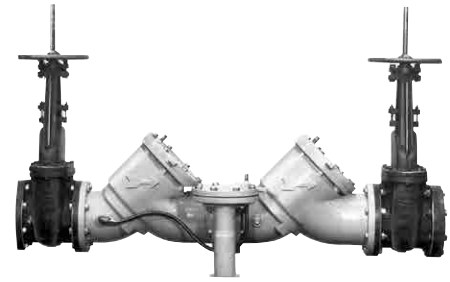

LF9090SY

### Features

- Replaceable seats
- Stainless steel internal parts
- No special tools required for servicing
- Captured spring check assemblies
- Fused epoxy coated & lined checks
- Industrial strength sensing hose
- Field reversible relief valve
- Air-in/water-out relief valve design provides maximum capacity during emergency conditions

### Pressure-Temperature

Temperature Range: 33°F – 110°F  
(0.5°C – 43°C) continuous  
140°F (60°C) intermittent  
Maximum Working Pressure: 175psi  
(12.1 bar)

### Approvals



Approved by the Foundation for Cross-Connection Control and Hydraulic Research at the University of Southern California.

### LF909

#### LEAD FREE

Series LF909 Reduced Pressure Zone Assemblies are designed to provide cross-connection control protection of the potable water supply in accordance with national plumbing codes. This series can be utilized in a variety of installations, including health hazard cross-connections in plumbing systems or for containment at the service line entrance. With its exclusive relief valve design incorporating the "air-in/water-out" principle, it provides substantially improved relief valve discharge performance during the emergency conditions of combined backsiphonage and backpressure with both checks fouled. The LF909 features Lead Free\* construction to comply with Lead Free\* installation requirements.

### Materials

- Check Valve Bodies: FDA epoxy coated cast iron
- Seats: Stainless steel
- Trim: Stainless steel
- Relief Valve Body: 2½"-3" Lead Free\* cast copper silicon alloy  
4"-10" FDA epoxy coated cast iron
- Test Cocks: Lead Free\* copper silicon alloy

### Models

#### Suffix:

**LF** – without shutoff valves

**NRS** – non-rising stem resilient seated gate valves


**OSY** – UL/FM outside stem & yoke resilient seated gate valves


**QT-FDA** – FDA epoxy coated quarter-turn ball valves

**S-FDA** – FDA epoxy coated strainer

**Note:** The installation of a drain line is recommended. When installing a drain line, an air gap is necessary.

\*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.

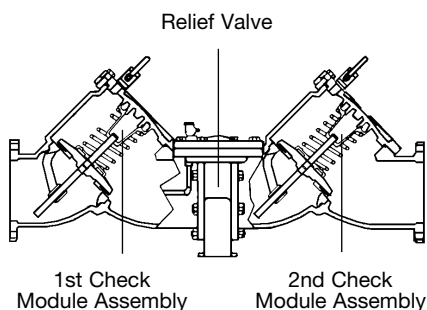

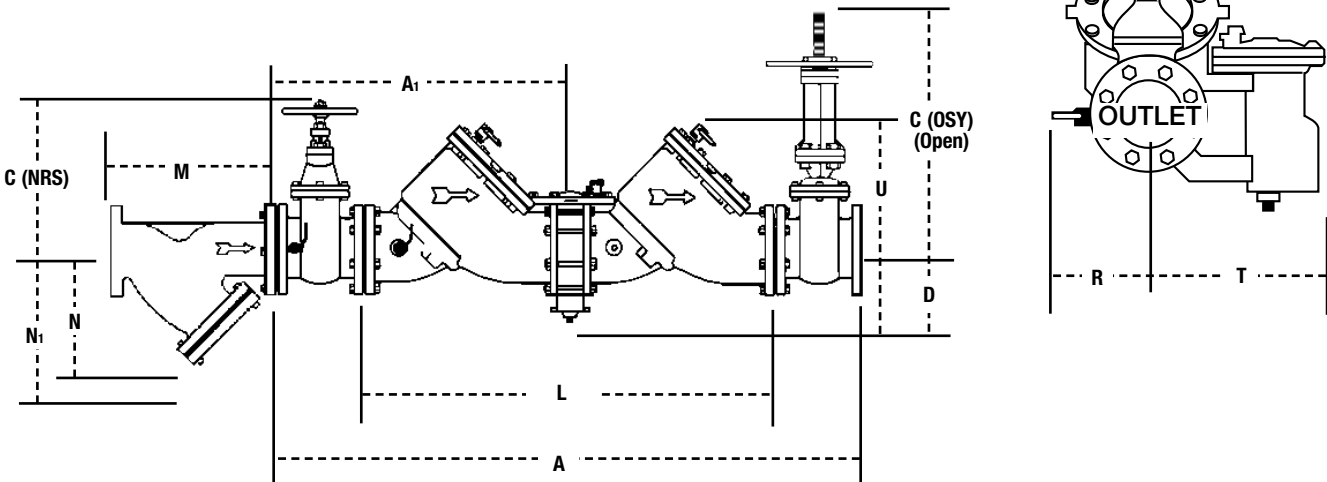

Note: Relief valve section is reversible, therefore, can be on either side and is furnished standardly as shown.

LF909

SIZE		DIMENSIONS																		WEIGHT					
		A		A1		C clearance for check (OSY)* (NRS)		D		L		U		R		R (QT)		T		NRS		OSY		QT	
in.	in. mm	in. mm	in. mm	in. mm	in. mm	in. mm	in. mm	in. mm	in. mm	in. mm	in. mm	in. mm	in. mm	in. mm	in. mm	in. mm	in. mm	lbs. kgs.	lbs. kgs.	lbs. kgs.	lbs. kgs.	lbs. kgs.	lbs. kgs.		
2½	41¼ 1048	20⅝ 524	16⅞ 416	9⅞ 238	5¼ 133	26⅞ 663	11 279	4 102	16 406	9⅞ 230	195 88.4	198 89.8	182 82.6												
3	42¼ 1073	21¼ 540	18⅞ 479	10¼ 260	5¼ 133	26⅞ 663	11 279	5 127	16 406	9⅞ 230	225 102	230 104	190 86												
4	55⅞ 1400	27⅝ 702	22¾ 578	12⅞ 310	6 152	37 940	14 356	6 152	19¾ 502	14⅜ 365	455 206	470 213	352 160												
6	65½ 1664	32¾ 832	30⅞ 765	16 406	6 152	44½ 1130	16 406	11 279	26 660	14⅜ 365	718 326	798 362	762 346												
8	78½ 2000	39⅞ 1000	37¼ 959	19⅞ 506	9¾ 248	55¼ 1403	21 533	11¼ 286	11¼ 286	19¼ 489	1350 612	1456 660	2286 1037												
10	93⅞ 2378	46⅞ 1190	45¼ 1162	23⅞ 605	9¾ 248	67⅞ 1711	21 533	12½ 318	12½ 318	21 533	2160 980	2230 1011	3716 1685												

\*UL, FM approved backflow preventers must include UL/FM approved OSY gate valves.

Strainer Dimensions

SIZE		DIMENSIONS				WEIGHT	
in.	in.	M		N1†		N	
		in.	mm	in.	mm	in.	mm
2½	10	254	10	254	6½	165	28
3	10⅞	257	10	254	7	178	34
4	12⅞	308	12	305	8¼	210	60
6	18½	470	20	508	13½	343	133
8	21⅞	549	22¼	578	15½	394	247
10	26	660	28	711	18½	470	370

† – Dimension required for screen removal

# Series LF009 / 009

## Reduced Pressure Zone Assemblies

Sizes: 1/4" – 3" (8 – 80mm)



LF009QT



009M2QT

### Features

- Single access cover and modular check construction for ease of maintenance
- Top entry - all internals immediately accessible
- Captured springs for safe maintenance
- Internal relief valve for reduced installation clearances
- Replaceable seats for economical repair
- Lead Free\* cast copper silicon alloy body construction for durability 1/4" – 2"
- Fused epoxy coated cast iron body 2 1/2" and 3"
- Ball valve test cocks — screwdriver slotted 1/4" – 2"
- Large body passages provides low pressure drop
- Compact, space saving design
- No special tools required for servicing

### Pressure-Temperature

#### Series LF009: 1/4" - 2" (8 – 50mm)


Suitable for supply pressure up to 175psi (12 bar). Water temperature: 33°F – 180°F (0.5° – 75°C).

#### Series 009: 1/4" - 2" (8 – 50mm)

Suitable for supply pressure up to 175psi (12 bar). Water temperature: 33°F – 180°F (0.5° – 75°C).

#### Sizes: 2 1/2" and 3" (65 – 80mm)

are suitable for supply pressures up to 175psi (12.1 bar) and water temperature at 110°F (43°C) continuous, 140°F (60°C) intermittent.

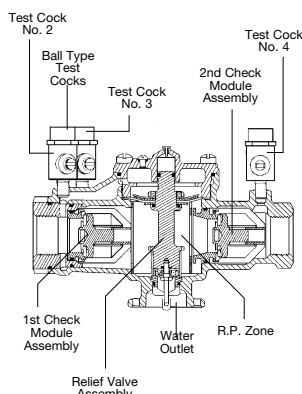

### LF009

#### LEAD FREE

Series LF009 Reduced Pressure Zone Assemblies are designed to protect potable water supplies in accordance with national plumbing codes and water authority requirements. This series can be used in a variety of installations, including the prevention of health hazard cross-connections in piping systems or for containment at the service line entrance. The LF009 features Lead Free\* construction to comply with Lead Free\* installation requirements.

This series features two in-line, independent check valves, captured springs and replaceable check seats with an intermediate relief valve. Its compact modular design facilitates easy maintenance and assembly access. Sizes 1/4" – 1" shutoffs have tee handles.

### Materials

#### 1/4" – 2" (8 – 50mm)

- Lead Free\* cast copper silicon alloy body construction, silicone rubber disc material in the first and second check plus the relief valve. Replaceable polymer check seats for first and second checks. Removable stainless steel relief valve seat. Stainless steel cover bolts.
- Standardly furnished with NPT body connections. Model LF009QT furnished with quarter-turn, full port, resilient seated, Lead Free\* cast copper silicon alloy body ball valve shutoffs.

#### 2 1/2" and 3" (65 – 80mm)

- FDA approved) Epoxy coated cast iron unibody with plastic seats
- Relief valve with stainless steel seat and trim
- Lead Free cast copper silicon alloy body ball valve test cocks

### Models

#### Sizes: 1/4" – 2" (8 – 50mm)

##### Suffix:

QT – quarter-turn ball valves

S – strainer

LF – without shutoff valves

PC – internal polymer coating

##### Prefix:

U – union connections

### Approvals



ASSE, AWWA, CSA, IAPMO

Approved by the Foundation for Cross-Connection Control and Hydraulic Research at the University of Southern California.

Approval models QT, PC, NRS, OSY.

UL Classified

2 1/2" and 3" with OSY gate valves.

3/4" - 2" without shutoff valves (-LF) (except LF009M3LF)

**\*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.**

#### Sizes: 2 1/2" – 3" (65 – 80mm)

##### Suffix:

NRS – non-rising stem resilient seated gate valves

OSY – UL/FM outside stem and yoke resilient seated gate valves

S-FDA – FDA epoxy coated strainer

QT-FDA – FDA epoxy coated quarter-turn ball valves

LF – without shutoff valves



For Use in Non-Potable Applications

Series 009 Reduced Pressure Zone Assemblies are designed to protect drinking water supplies from dangerous cross-connections in accordance with national plumbing codes and water authority requirements for non-potable service applications such as irrigation, fireline, or industrial processing.

This series features two in-line, independent check valves, captured springs and replaceable check seats with an intermediate relief valve. Its compact modular design facilitates easy maintenance and assembly access. Sizes 1/4" – 1" shutoffs have tee handles.

Materials

Size: 1/4" – 2" (8 – 50mm)

- Bronze body construction, silicone rubber disc material in the first and second check plus the relief valve. Replaceable polymer check seats for first and second checks. Removable stainless steel relief valve seat. Stainless steel cover bolts.
- Standardly furnished with NPT body connections. For optional bronze union inlet and outlet connections, specify prefix U (1/2" – 2"). Series 009QT furnished with quarter turn, full port, resilient seated, bronze ball valve shutoffs

Approvals



ASSE, AWWA, CSA, IAPMO  
Approved by the Foundation for Cross-Connection Control and Hydraulic Research at the University of Southern California.  
UL Classified 3/4" – 2"  
(LF models only except 009M3LF)

Models

Size: 1/4" – 2" (8 – 50mm)

Suffix:

QT – quarter-turn ball valves

S – bronze strainer

LF – without shutoff valves

AQT – elbow fittings for 360° rotation  
3/4" – 2" only

PC – internal Polymer Coating

SH – stainless steel ball valve handles


HC – 2 1/2" inlet/outlet fire hydrant fitting  
(2" valve)

Prefix:

C – clean and check strainer 3/4" – 1" only

U – union connections

Dimensions and Weights

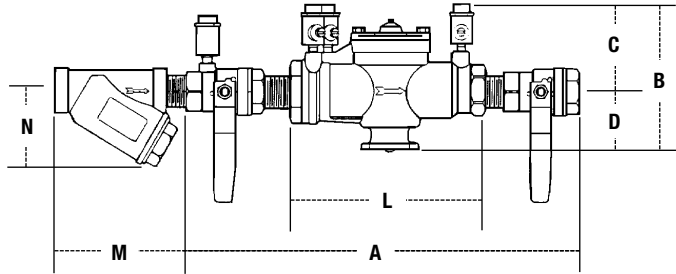


LF009 / 009 1/4" – 2" (8 – 50mm)

SIZE		DIMENSIONS (APPROX.)										WEIGHT				
	A		B		C		D		L		M		N			
<i>in.</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>lbs.</i>	<i>kgs.</i>
¼	10	250	4⅞	117	3⅝	86	1¼	32	5½	140	2⅜	60	2½	64	5	2
⅜	10	250	4⅞	117	3⅝	86	1¼	32	5½	140	2⅜	60	2½	64	5	2
½	10	250	4⅞	117	3⅝	86	1¼	32	5½	140	2¾	70	2¼	57	5	2
¾	10¾	273	5	127	3½	89	1½	38	6¼	171	3⅞	81	2¾	70	6	3
1	16¾	425	5½	140	3	76	2½	64	9½	241	3¾	95	3	76	12	5
1¼	17⅞	441	6	150	3½	89	2½	64	11⅞	289	4⅞	113	3½	89	15	6
1½	17⅞	454	6	150	3½	89	2½	64	11⅞	283	4⅞	124	4	102	16	7
2	21⅞	543	7¾	197	4½	114	3¾	83	13½	343	5⅟16	151	5	127	30	13

# Series LF009 / 009

## Reduced Pressure Zone Assemblies

Dimensions and Weight cont.

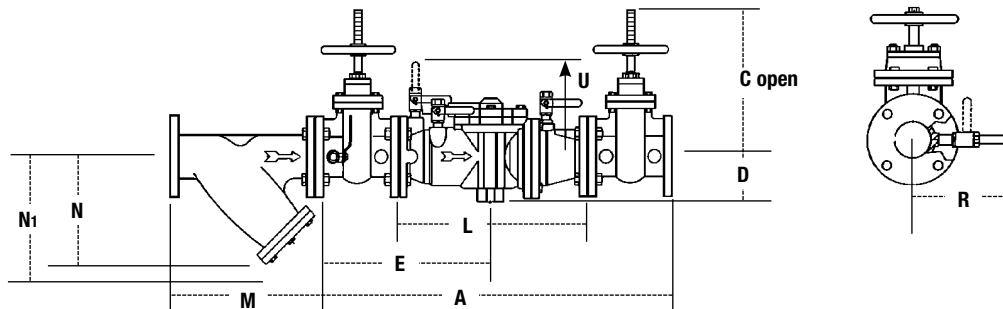

STRAINER SIZE		DIMENSIONS (APPROX.)						WEIGHT	
in.	mm	M		N		N1†		lbs.	kgs.
2½	65	10	254	6½	165	9¼	248	28	12.7
3	80	10⅞	257	7	178	10	254	34	15.4

†Clearance for servicing

### LF009 2½" and 3" (65 – 80mm)

MODEL	SIZE	DIMENSIONS (APPROX.)										WEIGHT					
		A		C		D		E		L		R		U			
	<i>in.</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>lbs.</i>	<i>kgs.</i>
LF009LF	2½	—	—	—	—	4½	114	—	—	18⅞	460	—	—	10⅝	270	76	34.5
LF0090SY	2½	33¼	845	15⅞	403	4½	114	16⅜	416	18⅞	460	7¾	197	10⅝	270	166	75.3
LF009NRS	2½	33¼	845	11⅞	289	4½	114	16⅜	416	18⅞	460	7¾	197	10⅝	270	161	73.0
LF009QTFDA	2½	33¼	845	6	152	4½	114	16⅜	416	18⅞	460	7¾	197	10⅝	270	150	68.0
LF009LF	3	—	—	—	—	4½	114	—	—	18⅞	460	—	—	10⅝	270	76	34.5
LF0090SY	3	34¼	870	18½	470	4½	114	16⅞	422	18⅞	460	8¾	222	10⅝	270	198	89.8
LF009NRS	3	34¼	870	12¾	324	4½	114	16⅞	422	18⅞	460	8¾	222	10⅝	270	191	86.6
LF009QTFDA	3	34¼	870	7	178	4½	114	16⅞	422	18⅞	460	8¾	222	10⅝	270	158	71.7


### LFU009QT / U009QT

MODEL	SIZE	DIMENSIONS						WEIGHT	
		A		B		C			
	<i>in.</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>		
LFU009QT	½	12 <sup>3</sup> / <sub>16</sub>	326	4 <sup>5</sup> / <sub>8</sub>	117	3 <sup>7</sup> / <sub>16</sub>	87	5.5	2.5
LFU009M2QT	¾	13¾	349	5	127	3¾	95	6	2.7
LFU009M2QT	1	17¾	441	5½	140	3⅞	79	12.75	5.8
LFU009M2QT	1¼	24½	622	7¾	197	4	100	26.5	12.0
LFU009M2QT	1½	25½	648	7¾	197	4¼	108	28.75	13.0
LFU009M2QT	2	27¾	695	7¾	197	4¼	108	32.75	14.9
U009QT	½	12 <sup>3</sup> / <sub>16</sub>	326	4 <sup>5</sup> / <sub>8</sub>	117	3 <sup>7</sup> / <sub>16</sub>	87	5.5	2.5
U009M2QT	¾	13¾	349	5	127	3¾	95	6	2.7
U009M2QT	1	17¾	441	5½	140	3⅞	79	12.75	5.8
U009M2QT	1¼	24½	622	7¾	197	4	100	26.5	12.0
U009M2QT	1½	25½	648	7¾	197	4¼	108	28.75	13.0
U009M2QT	2	27¾	695	7¾	197	4¼	108	32.75	14.9


# Series 994BLT, 994HMB

## Hydrant Meter Backflow Preventers

Sizes: 994BLT 2½" FNPT x 3" MNPT / 994HMB 2½" – 7NST x 3"

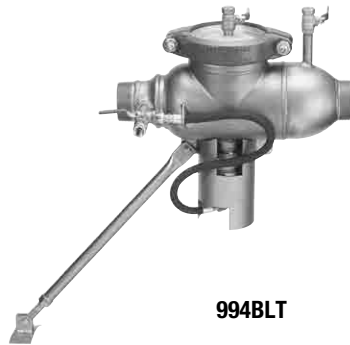

994BLT

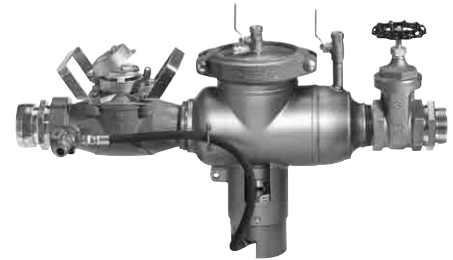

994HMB

### Features

- Built-in support leg is adjustable in the field, no matter the installation. Eliminates assembly from sitting directly in field or from being stacked on wood bracing.
- Dual thread connections, inside 2½" FNPT and outside 3" MNPT threaded on each inlet and outlet, allows the user a variety of connection alternatives.
- Large flow capacity-rated at over 500 gpm with less than 14psi (96.5Kpa) loss per ASSE, USC and AWWA standards for Reduced Pressure Zone Assemblies.
- No field assembly required, eliminates leaks, fouls, and improper assembly.
- Factory assembled and tested.
- Variety of end connection accessories are available to fit on-site requirements.
- Corrosion resistant 304 stainless steel body for long life field dependability.

Portable-lightweight design makes device easily transportable between job sites.

### Pressure-Temperature

Temperature Range: 33°F – 110°F  
(0.5°C – 43°C)  
Maximum Working Pressure: 175psi  
(12.1 bar)

### 994BLT, 994HMB

Model 994BLT, 994HMB Portable Hydrant Backflow Preventers are designed to protect drinking water supplies from dangerous cross-connections in accordance with national plumbing codes and water authority requirements for non-potable service applications such as irrigation, fireline, or industrial processing.

For use in protection of water from a fire hydrant or other nonpermanent installation where flow is in one direction only and the possibility of a cross-connection exists. This model can be used where approved by the local authority having jurisdiction on health hazard cross-connections.

Ideal for use with client's existing hydrant meter hookup.

### Materials

- Body and Cover: Stainless Steel
- Check Assemblies: Engineered Plastic and Stainless Steel
- Relief Valve Assembly: Engineered Plastic and Stainless Steel
- Lid Coupler: DI/CI

### Options

#### Inlet modules

- 3" female hydrant thread
- 3" male hydrant thread
- 2½" female hydrant thread
- 2½" male hydrant thread
- 2½" male NPT thread
- Customer specified

#### Outlet modules

- 3" gate w/female hose thread
- 3" gate w/male hose thread
- 2½" gate w/female hose thread
- 2½" gate w/male hose thread
- 3" gate valve only, 3" INPT thread
- 2½" gate valve only, 2½" FNPT thread
- Customer specified


#### Foot modules

- Uneven surface saddle (supplied STD with unit)
- Flat surface adapter
- Customer Specified

### Approvals

Models 994BLT, 994HMB Portable Hydrant Backflow Preventers meet the design requirements of most national standards. Due to the portability of the unit, there are no national approvals available. Contact the factory for specific approvals on the reduced pressure back-flow preventer.

### Dimensions — Weights

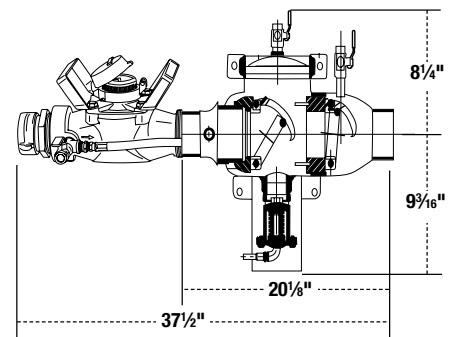


MODEL	WEIGHT	
	lbs.	kgs.
994BLT	62	28
994HMB-GPM	66	30
994HMB-CFM	66	30

# Series LF919 / 919

## Reduced Pressure Zone Assemblies

LF919 Sizes: 3/4" – 2" (20 – 50mm) / 919 Sizes: 1/4" – 2" (8 – 50mm)

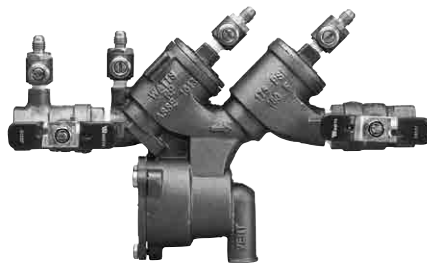


LF919QT

### Features

- Separate access covers for the check valves and relief valve for ease of maintenance
- Top entry-all check internals easily accessible
- Chloramine resistant rubber elastomers
- Check valve poppet assemblies are fully guided by innovative plastic seat guide
- Replaceable push-in check valve and relief valve seats eliminates threads from the water way
- EZ twist relief valve cover quarter-turn locking joint captures the spring load during repair to facilitate disassembly
- Innovative check valve plastic cover bushing provides trouble free guiding of the check valve poppet
- Bottom mounted relief valve provides reduced installation clearances
- Compact, space saving design
- No special tools required for servicing
- Top mounted test cocks for ease in testing and reduced installation clearances
- Standardly furnished with NPT body connections

### Pressure-Temperature

Temperature Range: 33°F – 180°F  
(0.5°C – 82°C)  
Maximum Working Pressure: 175psi  
(12.1 bar)

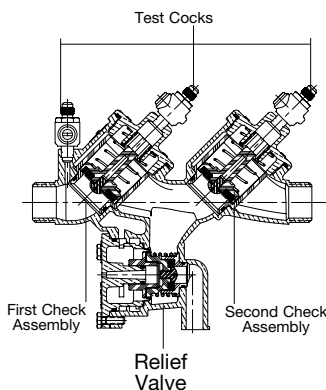

### LF919

#### LEAD FREE

Series LF919 Reduced Pressure Zone Backflow Assemblies are designed to protect potable water supplies in accordance with national plumbing codes and water authority requirements. This series can be used in a variety of installations, including the prevention of health hazard cross-connections or for containment at the service line entrance.

This series features two poppet style check valves, replaceable check seats, with an intermediate relief valve. Its compact modular design facilitates easy maintenance and assembly access. Sizes 3/4" – 1" (5 – 25mm) shutoffs have tee handles. The LF919 features Lead Free\* construction to comply with Lead Free\* installation requirements.

### Materials

- Body: Lead Free\* Cast Copper Silicon Alloy
- Discs: Silicone rubber
- Check Seats: Replaceable polymer
- Cover Bolts: Stainless steel

### Models

#### Suffix:

- QT – quarter-turn ball valves
- S – bronze strainer

### Approvals



Approved by the Foundation for Cross-Connection Control and Research at The University of Southern California.

\*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.

### 919

#### For Use in Non-Potable Applications

Series 919 Reduced Pressure Zone Backflow Assemblies are designed to protect drinking water supplies from dangerous cross-connections in accordance with national plumbing codes and water authority requirements for non-potable service applications such as irrigation, fireline, or industrial processing. Sizes 1/4" – 1" shutoffs have tee handles.

### Materials

- Body: Bronze
- Discs: Silicone rubber
- Check Seats: Replaceable polymer
- Cover Bolts: Stainless steel

### Models

#### Suffix:

- QT – quarter-turn ball valves
- S – bronze strainer
- LF – without shutoff valves
- AQT – elbow fitting for 360° rotation
- ZQT – inlet & outlet flow up

### Approvals




Approved by the Foundation for Cross-Connection Control and Research at The University of Southern California (for sizes 3/4" -2")

#### Prefix:

- U – union connections

## Dimensions and Weights


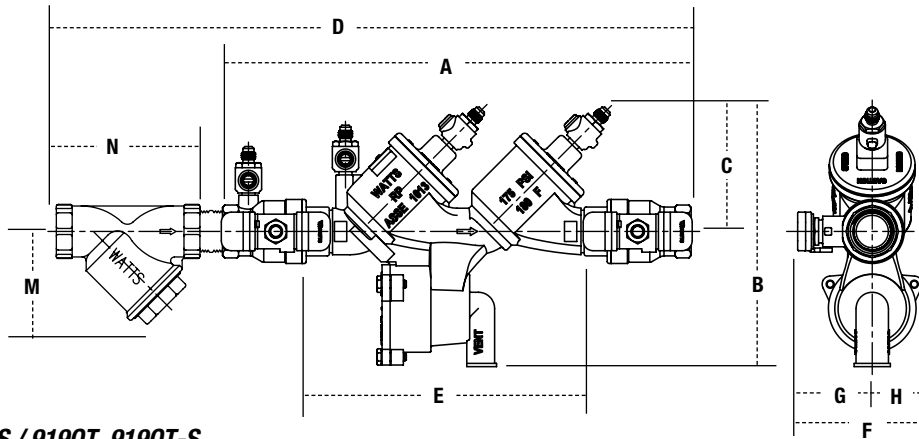


**LF919QT, LF919QT-S / 919QT, 919QT-S**

SIZE		DIMENSIONS										STRAINER DIMENSIONS				WEIGHT									
		A		B		C		D		E (LF)		F		G		H		M		N		919QT		919QT-S	
in.		in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	kgs.	lbs.	kgs.
1/4		9½	241	6⅞	175	2⅞	73	12¾	314	5¾	146	3	75	1⅜	35	1⅞	40	2⅜	60	2½	64	5.8	2.6	6.3	2.9
3/8		9½	241	6⅞	175	2⅞	73	12¾	314	5¾	146	3⅓	84	1¾	44	1⅞	40	2⅜	60	2½	64	5.8	2.6	6.3	2.9
½		9½	241	6⅞	175	2⅞	73	12¾	324	5¾	146	3⅜	86	1⅞	48	1⅞	40	2¾	70	2¼	57	5.8	2.6	6.3	2.9
¾		12⅞	307	7⅞	188	3½	88	15½	393	7⅞	195	3⅜	92	2⅞	52	1⅞	40	1⅞	41	3⅞	81	8.3	3.7	10.0	4.5
1		14½	368	8	202	3⅝	98	19⅞	487	9⅞	233	4	102	2⅞	62	1⅞	40	2⅞	54	3¾	95	11.8	5.4	13.8	6.3
1¼		18⅞	461	11⅞	290	5⅝	129	23¼	591	11⅞	297	5⅝	130	2⅝	67	2½	64	2½	64	4⅞	113	22.3	10.1	26.3	11.9
1½		18¾	476	11⅞	290	5⅝	129	25⅞	637	11⅞	297	5⅝	143	3⅞	79	2½	64	3	76	4⅞	124	28.3	12.8	32.0	14.5
2		21⅞	535	12⅞	307	5⅝	142	28⅞	732	13⅝	340	5⅞	151	3⅞	87	2½	64	3⅞	90	5⅞	151	37.3	16.9	45.0	20.4

**U919QT, U919QT-S**

SIZE		DIMENSIONS										STRAINER DIMENSIONS				WEIGHT	
	A	B	C	D	E (LF)	F	G	H	M	N	U919QT	U919QT-S					
<i>in.</i>	<i>in.</i> <i>mm</i>	<i>in.</i> <i>mm</i>	<i>in.</i> <i>mm</i>	<i>in.</i> <i>mm</i>	<i>in.</i> <i>mm</i>	<i>in.</i> <i>mm</i>	<i>in.</i> <i>mm</i>	<i>in.</i> <i>mm</i>	<i>in.</i> <i>mm</i>	<i>in.</i> <i>mm</i>	<i>lbs.</i> <i>kgs.</i>	<i>lbs.</i> <i>kgs.</i>					
¾	16 <sup>15</sup> / <sub>16</sub> 430	8 <sup>1</sup> / <sub>16</sub> 204	3 <sup>7</sup> / <sub>8</sub> 98	20 <sup>5</sup> / <sub>16</sub> 515	11 <sup>1</sup> / <sub>2</sub> 292	3 <sup>5</sup> / <sub>8</sub> 92	2 <sup>1</sup> / <sub>16</sub> 52	1 <sup>9</sup> / <sub>16</sub> 40	1 <sup>5</sup> / <sub>8</sub> 41	3 <sup>9</sup> / <sub>16</sub> 81	13.4 6.1	15.1 6.9					
1	17 <sup>1</sup> / <sub>8</sub> 435	8 <sup>1</sup> / <sub>16</sub> 204	3 <sup>7</sup> / <sub>8</sub> 98	21 <sup>13</sup> / <sub>16</sub> 554	11 <sup>3</sup> / <sub>4</sub> 297	4 102	2 <sup>7</sup> / <sub>16</sub> 62	1 <sup>9</sup> / <sub>16</sub> 40	2 <sup>1</sup> / <sub>8</sub> 54	3 <sup>3</sup> / <sub>4</sub> 95	13.3 6.0	15.3 6.9					
1¼	20 <sup>15</sup> / <sub>16</sub> 532	11 <sup>7</sup> / <sub>16</sub> 290	5 <sup>1</sup> / <sub>8</sub> 129	26 <sup>1</sup> / <sub>4</sub> 662	15 <sup>3</sup> / <sub>8</sub> 390	5 <sup>1</sup> / <sub>8</sub> 130	2 <sup>5</sup> / <sub>8</sub> 67	2½ 64	2½ 64	4 <sup>7</sup> / <sub>16</sub> 113	25.9 11.8	29.9 13.6					
1½	21 <sup>9</sup> / <sub>16</sub> 547	11 <sup>7</sup> / <sub>16</sub> 290	5 <sup>1</sup> / <sub>8</sub> 129	27 <sup>7</sup> / <sub>8</sub> 708	15 <sup>3</sup> / <sub>8</sub> 390	5 <sup>5</sup> / <sub>8</sub> 143	3 <sup>1</sup> / <sub>8</sub> 79	2½ 64	3 76	4 <sup>7</sup> / <sub>8</sub> 124	31.9 14.5	35.6 16.2					
2	24 <sup>15</sup> / <sub>16</sub> 633	12 <sup>1</sup> / <sub>16</sub> 307	5 <sup>5</sup> / <sub>8</sub> 142	32 <sup>11</sup> / <sub>16</sub> 830	16 <sup>3</sup> / <sub>4</sub> 425	5 <sup>15</sup> / <sub>16</sub> 151	3 <sup>7</sup> / <sub>16</sub> 87	2½ 64	3 <sup>9</sup> / <sub>16</sub> 90	5 <sup>15</sup> / <sub>16</sub> 151	41.6 18.9	49.3 22.4					

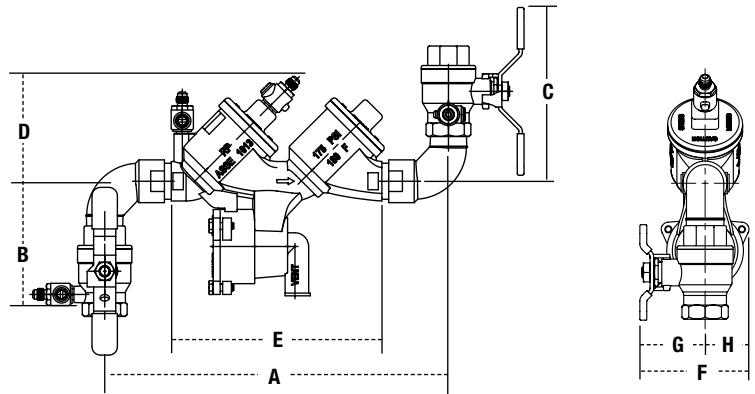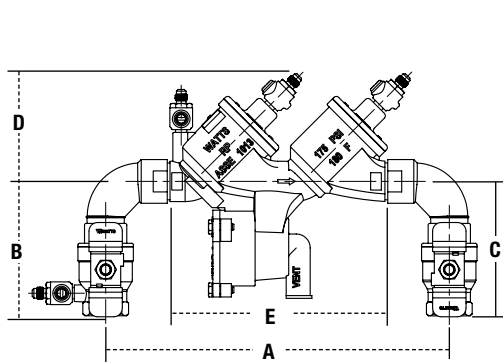

**919AQ, 919ZQT**

SIZE		DIMENSIONS										WEIGHT	
in.		A in. mm	B in. mm	C in. mm	D in. mm	E (LF) in. mm	F in. mm	G in. mm	H in. mm			lbs.	kgs.
3/4		10 3/8 263	3 15/16 100	3 15/16 100	3 1/2 88	7 11/16 195	3 3/8 92	2 1/16 52	1 9/16 40			9.3	4.2
1		12 1/4 311	4 13/16 122	4 13/16 122	3 7/8 98	9 3/16 233	4 102	2 7/16 62	1 9/16 40			13.3	6.0
1 1/4		16 1/16 407	5 7/8 149	5 7/8 149	5 1/8 129	11 11/16 297	5 1/8 130	2 5/8 67	2 1/2 64			24.0	10.9
1 1/2		16 5/8 421	6 1/2 164	6 1/2 164	5 1/8 129	11 11/16 297	5 5/8 143	3 1/8 79	2 1/2 64			30.5	13.8
2		17 5/16 440	6 3/8 168	6 3/8 168	5 1/8 142	13 3/8 340	5 15/16 151	3 7/16 87	2 1/2 64			40.6	18.4

# Series LF957RPDA, LF957NRPDA, LF957ZRPDA / 957RPDA, 957NRPDA, 957ZRPDA

## Reduced Pressure Detector Assemblies

Sizes: 2½" – 10" (65 – 250mm)



LF957NRPDA0SY

### Features

- Extremely compact design
- 70% lighter than traditional designs
- 304 (Schedule 40) stainless steel housing & sleeve
- Groove fittings allow integral pipeline adjustment
- Patented torsion spring check provides lowest pressure loss
- Unmatched ease of serviceability
- Replaceable check disc rubber
- Available with grooved butterfly valve shutoffs
- Bottom mounted cast stainless steel relief valve
- Metered bypass to detect leakage or theft of water from the fire sprinkler system

### Pressure-Temperature

Temperature Range: 33°F – 110°F  
(0.5°C – 43°C)  
Maximum Working Pressure: 175psi  
(12.1 bar)

### Models

Suffix:

**OSY** – UL/FM outside stem and yoke, resilient seated gate valves

**BFG** – UL/FM grooved gear operated butterfly valves with tamper switch

**\*OSY FxG** – Flanged inlet gate connection and grooved outlet gate connection

**\*OSY GxG** – Grooved inlet gate connection and flanged outlet gate connection

**\*OSY GxG** – Grooved inlet gate connection and grooved outlet gate connection

Available with grooved NRS gate valves - consult factory\*

Post indicator plate and operating nut available - consult factory\*

\*Consult factory for dimensions

## LF957RPDA, LF957NRPDA, LF957ZRPDA

### LEAD FREE

Series LF957RPDA, LF957NRPDA, 9LF57ZRPDA Reduced Pressure Detector Assemblies provide protection to the potable water system from contamination in accordance with national plumbing codes. The LF957RPDA, LF957NRPDA, LF957ZRPDA are normally used in health hazard applications to protect against back-siphonage and backpressure. The Watts LF957RPDA, LF957NRPDA, LF957ZRPDA are used to monitor unauthorized use of water from the fire protection system. They feature Lead Free\* construction to comply with Lead Free\* installation requirements.

### Materials

- Housing & Sleeve: 304 (Schedule 40) Stainless Steel
- Elastomers: EPDM, Silicone and Buna 'N'
- Torsion Spring Checks: Noryl®, Stainless Steel
- Check Discs: Reversible Silicone or EPDM
- Test Cocks: Bronze Body Nickel Plated
- Pins & Fasteners: 300 Series Stainless Steel
- Springs: Stainless Steel
- Bypass: Lead Free\* materials

### Approvals



\*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.

## 957RPDA, 957NRPDA, 957ZRPDA

### For Use in Non-Potable Applications

Series 957RPDA, 957NRPDA, 957ZRPDA Reduced Pressure Detector Assemblies are designed to protect drinking water supplies from dangerous cross-connections in accordance with national plumbing codes and water authority requirements for non-potable service applications such as irrigation, fireline, or industrial processing. The 957RPDA, 957NRPDA, 957ZRPDA are normally used in health hazard applications to protect against back-siphonage and backpressure. The Watts 957RPDA, 957NRPDA, 957ZRPDA are used to monitor unauthorized use of water from the fire protection system.

### Materials


- Housing & Sleeve: 304 (Schedule 40) Stainless Steel
- Elastomers: EPDM, Silicone and Buna 'N'
- Torsion Spring Checks: Noryl®, Stainless Steel
- Check Discs: Reversible Silicone or EPDM
- Test Cocks: Bronze Body Nickel Plated
- Pins & Fasteners: 300 Series Stainless Steel
- Springs: Stainless Steel

### Approvals






## Dimensions and Weights

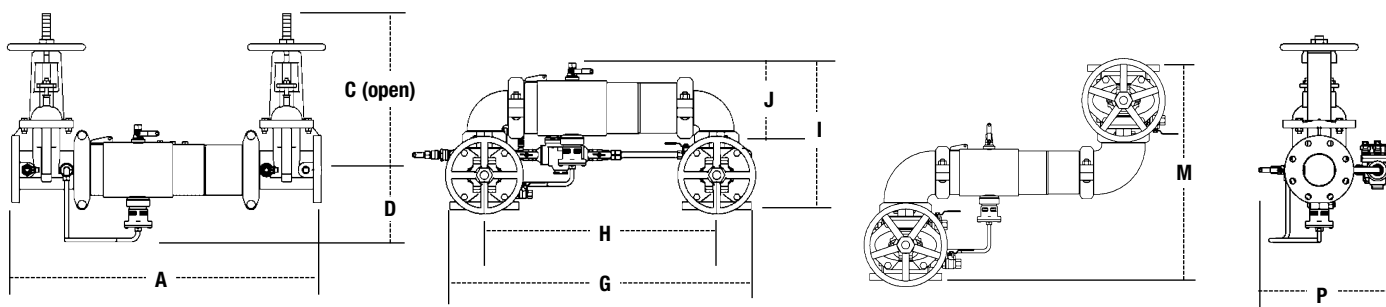

### LF957RPDA0SY / 957RPDA0SY

SIZE			DIMENSIONS												WEIGHT							
	A		C (OSY)		D		G		H		I		J		M		P		957RPDA		957NRPDA	
<i>in.</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>lbs.</i>	<i>kgs.</i>	<i>lbs.</i>	<i>kgs.</i>
2½	31	787	16¾	416	6½	165	29⅞	738	22	559	15½	393	8⅓	223	21⅞	548	13¾	335	142	64	150	68
3	31⅞	805	18⅞	479	6⅞	170	30¼	768	22¾	578	17⅞	435	9⅞	233	23⅞	587	14½	368	162	73	175	79
4	33⅞	856	22¾	578	7	178	33	838	24	610	18½	470	9⅝	252	26½	673	15⅞	386	178	81	201	91
6	43½	1105	30⅞	765	8½	216	44¾	1137	33¾	857	23⅞	589	13⅞	332	32¾	832	19	483	312	142	353	160
8	50	1270	37¾	959	9⅞	246	54⅞	1375	40⅞	1032	27⅞	697	15⅞	399	37⅞	943	21⅞	538	497	225	572	259
10	57½	1460	45¾	1162	11⅞	285	66	1676	50	1270	32½	826	17⅞	440	46⅞	1178	24	610	797	362	964	437

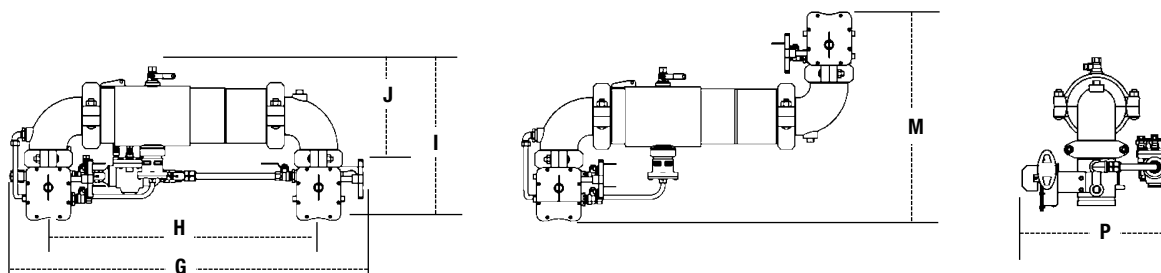

### LF957RPDABFG / 957RPDABFG


SIZE			DIMENSIONS								WEIGHT	
in.	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
2½	32½	826	23½	597	15½	394	9½	241	21⅓	555	15⅓	402
3	34	864	24½	622	16⅝	414	10⅞	256	23⅞	587	16⅞	410
4	35⅞	905	26	660	17⅞	437	10⅝	279	24⅝	634	16⅞	422
6	46½	1181	35⅝	908	20½	521	13½	343	28¼	718	19	483



# Series 994RPDA

## Reduced Pressure Detector Assemblies

Sizes: 2½" – 6" (65 – 150mm)

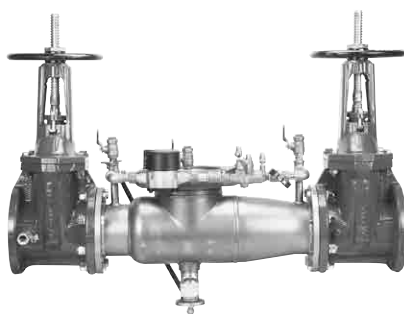

994RPDA0SY

### Features

- Stainless steel construction provides long term corrosion resistance and maximum strength
- Stainless steel body is half the weight of competitive designs reducing installation and shipping costs
- Short end to end dimensions makes retrofit easy
- Bottom mounted relief valve reduces clearance requirements when installed against an outside wall
- Torsion spring check valves provides maximum flow at low pressure drop
- Thermoplastic & stainless steel check valves for trouble-free operation
- No special tools required for servicing
- Compact construction allows for smaller enclosures
- Stainless steel relief valve features a balanced rolling diaphragm to eliminate sliding seals and lower maintenance costs
- Detects underground leaks and unauthorized water use.
- GPM or CFM meter available

### Pressure-Temperature

Temperature Range: 33°F – 110°F  
(0.5°C – 43°C)

Maximum Working Pressure: 175psi  
(12.1 bar)

### Materials

- All internal metal parts: 300 Series stainless steel
- Main valve body: 300 Series stainless steel
- Check assembly: Noryl®
- Flange dimension in accordance with AWWA Class D

### 994RPDA

Series 994RPDA Reduced Pressure Detector Assemblies are designed to protect drinking water supplies from dangerous cross-connections in accordance with national plumbing codes and water authority requirements for non-potable service applications such as irrigation, fireline, or industrial processing. This series is usually used in health hazard applications in accordance with local governing water utility code.

### Models

#### Suffix:

LF – without shutoff valves

OSY – UL/FM outside stem and yoke resilient seated gate valves

\*OSY FxG – flanged inlet gate connection and grooved outlet gate connection

\*OSY GxG – grooved inlet gate connection and flanged outlet gate connection

\*OSY GxG – grooved inlet gate connection and grooved outlet gate connection

CFM – cubic feet per minute meter

GPM – gallons per minute meter

### Approvals




Available with grooved NRS gate valves - consult factory\*

Post indicator plate and operating nut available - consult factory\*

\*Consult factory for dimensions

Note: The installation of a drain line is recommended. When installing a drain line, an air gap is necessary.

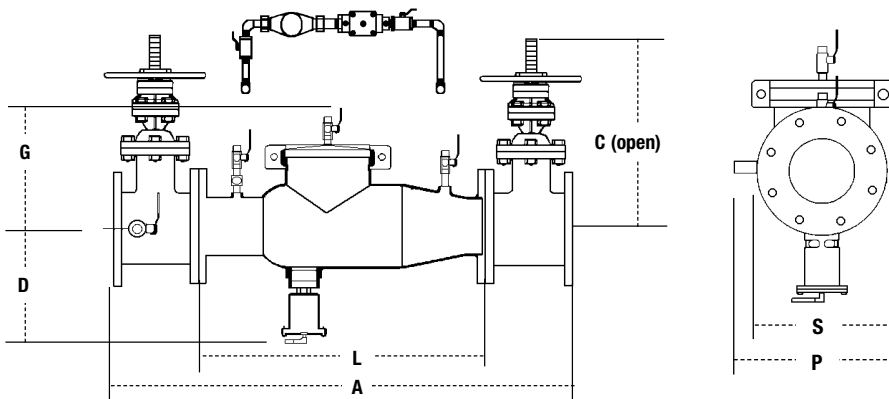


SIZE		DIMENSIONS										WEIGHTS						
	A		C		D		G		L		P		S		with Gates		without Gates	
<i>in.</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>lbs.</i>	<i>kgs.</i>	<i>lbs.</i>	<i>kgs.</i>
2½	37	940	16¾	416	10½	267	10	254	22	559	12½	318	7	178	170	77	61	28
3	38	965	18¾	479	10½	267	10	254	22	559	13	330	7½	191	205	93	65	29
4	40	1016	22¾	578	10½	267	10	254	22	559	14½	368	9	229	270	122	67	30
6	48½	1232	30⅞	765	11½	292	11½	292	27½	699	15½	394	11	279	405	184	105	48

# Series 909RPDA

## Reduced Pressure Detector Assemblies

Sizes: 2½" – 10" (65 – 250mm)

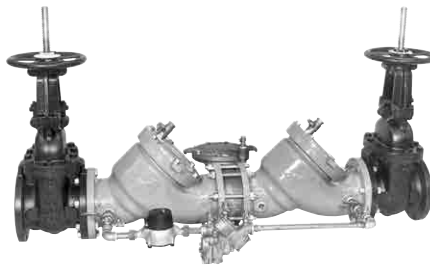

909RPDA0SY

### Features


- Body construction fused epoxy coated cast iron
- Replaceable bronze seats
- Maximum flow at low pressure drop
- Compact for economy combined with performance
- Design simplicity for easy maintenance
- Furnished with ⅝" x ¾" (16 x 19mm) meter
- Air-in/Water-out relief valve design provides maximum capacity during emergency conditions.
- No special tools required

### Pressure-Temperature

Temperature Range: 33°F – 140°F  
(0.5°C – 60°C)  
Maximum Working Pressure: 175psi  
(12.1 bar)

### Materials

- Discs: Rubber
- Body: Epoxy coated cast iron
- Seat and Disc Holder: Bronze
- Trim: Stainless steel
- Test Cocks: Bronze

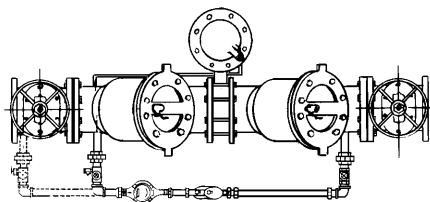

Note: Piping for 3" 909 will start from #1 gate valve and connect at #2 check valve.

### 909RPDA

Series 909RPDA Reduced Pressure Detector Assemblies are designed to protect drinking water supplies from dangerous cross-connections in accordance with national plumbing codes and water authority requirements for non-potable service applications such as irrigation, fireline, or industrial processing. This series is used in health hazard applications in accordance with local governing water utility code.

**Benefits:** Detects leaks with emphasis on the cost of unaccountable water; incorporates a meter which allow the water utility to:

- detect leaks that historically create great annual cost due to waste
- provide a detection point for unauthorized use. It can help locate illegal taps

Modular check design concept facilitates maintenance and assembly access. All sizes are standardly equipped with AWWA epoxy coated, UL/FM listed OSY resilient seated gate valves, CFM (cubic feet per minute) or GPM (gallon per minute) meter and ball type test cocks. A pressure differential relief valve is located in a zone between the check valves.

### Models

**Suffix:**

**OSY** – UL/FM outside stem and yoke resilient seated gate valves

**CFM** – cubic feet per minute meter


**GPM** – gallons per minute meter

**LF** – less shutoff valves

### Approvals



Approved by the foundation for Cross-Connection Control and Hydraulic Research at the University of Southern California.

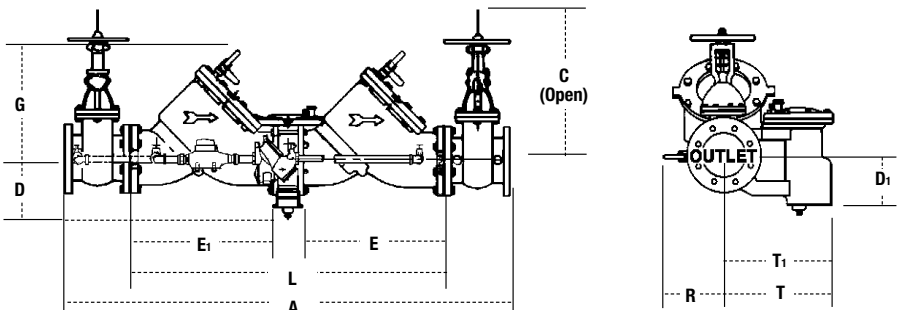

SIZE	DIMENSIONS										WEIGHT	
in.	A in. mm	C in. mm	D in. mm	D1 in. mm	E, E1 in. mm	G in. mm	L in. mm	R in. mm	T in. mm	T1 in. mm	lbs.	kgs.
2½	42⅞ 1070	16⅞ 416	5¼ 133	4¼ 114	12 305	7 178	26⅞ 664	14 356	9 229	7⅝ 194	230	104
3	42⅞ 1070	18⅞ 479	5¼ 133	4¼ 114	12 305	7 178	26⅞ 664	14 356	9 229	7⅝ 194	230	104
4	55⅞ 1400	22¾ 578	6 152	5⅞ 149	17 432	9½ 241	37 940	15 381	13⅝ 346	11¾ 299	470	213
6	66 1664	30⅞ 765	6 152	6 152	20¾ 527	14½ 368	45 1130	16 406	13⅝ 346	11¾ 299	798	362
8	78½ 1994	37¾ 959	9¾ 248	8⅝ 219	26 660	18½ 470	55¼ 1403	17 432	18½ 470	16⅞ 416	1456	660
10	93⅞ 2378	45¾ 1162	9¾ 248	8⅝ 219	32 813	21½ 546	67½ 1715	18 457	18½ 470	16⅞ 416	2230	1012

# Series LFN9

## Dual Check Vacuum Breakers

Sizes: 1/4" – 3/8" (6 – 10mm)



LFN9C

### Features

- Exclusive "Non-removable" design eliminates the need for break-away set screw
- Center-guided check valves for repeat-able seating
- In-line field testable - no special gauges required
- Manually drainable for freeze protection
- Durable brass body with stainless steel checks for corrosion resistance
- Streamlined design for low pressure drop
- Can be installed vertically or horizontally
- Positive backsiphonage protection

### Pressure-Temperature

Temperature Range: 33°F – 180°F  
(0.5°C – 82°C)  
Maximum Working Pressure: 150psi  
(8.6 bar)

### LFN9

#### LEAD FREE


Series LFN9 Dual Check Vacuum Breakers for In-Line Applications are used for continuous pressure, non-health hazard, applications. These valves have NPT female inlet and outlet connection and Lead Free\* brass body construction. The LFN9 features Lead Free\* construction to comply with Lead Free\* installation requirements.

### Models

LFN9C – chrome body

\*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.

### Dimensions and Weights



MODEL	SIZE	DIMENSIONS						WEIGHT	
		A		B		B1		lbs.	kgs.
	<i>in.</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>		
LFN9C	1/4	2 3/8	60	1 1/4	32	1	25	.38	.17
LFN9C	3/8	2 3/8	60	1 1/4	32	1	25	.38	.17
LFN9	1/4	2 3/8	60	1 1/4	32	1	25	.38	.17
LFN9	3/8	2 3/8	60	1 1/4	32	1	25	.38	.17

# Series 9BD

## Backflow Preventer for Vending Machine Water Supply Lines

Sizes: 1/4" – 3/8" (6 – 10mm)



9BD

### Features

- Available in Flare or NPTM end connections
- Stainless steel body and parts
- Instant check valve response
- Minimum pressure drop
- Triple check protection of the water supply

### Pressure-Temperature

Temperature Range: 33°F – 140°F  
(0.5°C – 60°C)

Maximum Working Pressure: 150psi  
(10.34 bar)

All stainless steel body and heavy duty rubber parts assure the longest and most dependable operating life. All rubber compounds comply with FDA food additive regulations.

### 9BD

#### LEAD FREE

Model 9BD backflow preventer for vending machine water supply lines prevents backflow of carbon dioxide gas and carbonated water into the water supply system to vending machines, thus eliminating the hazardous reaction of carbon dioxide with copper tubing.

### Approvals

Approved by independent testing, completing over 2,000,000 successful pump cycles with positive backflow protection and trouble-free performance.


All rubber compounds comply with FDA food additive regulations.

**\*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.**



Dual Check Valves

### Dimensions and Weights



SIZE	DIMENSIONS				WEIGHT	
	A		B		lbs.	kgs.
	in.	mm	in.	mm		
1/4	2 3/4	70	1 3/8	35	.38	.17
3/8	2 3/4	70	1 3/8	35	.38	.17

# Series LFN9-CD

## Dual Check Vacuum Breakers

Sizes: 3/4" (20mm)



LFN9CD

### Features

- Exclusive "Non-removable" design eliminates the need for break-away set screw
- Center-guided check valves for repeatable seating
- In-line field testable - no special gauges required
- Manually drainable for freeze protection
- Durable brass body with stainless steel checks for corrosion resistance
- Streamlined design for low pressure drop
- Can be installed vertically or horizontally
- Positive backsiphonage protection

### Pressure-Temperature

Maximum Pressure: 125psi (8.6 bars)  
Maximum Temperature: 180°F (82°C)

### LFN9-CD

#### LEAD FREE

The LFN9-CD is designed to prevent high hazard backsiphonage backflow and low-head backpressure (10ft. or less) from contaminating the potable water supply. The LFN9-CD is ideally suited to prevent backflow associated with hose connections and may be screwed directly to the sill cock, yard hydrant or wall hydrant. Typical installations include service sinks, chemical dispensers, sill cocks and frost proof hydrants.

Watts LFN9-CD features include two independently operating rubber and stainless steel check valves with an atmospheric vent located between the check valves. In the event of fouling of the downstream check valve, leakage would be vented to atmosphere, thereby providing a visual indication of failure. The integrity of the check valves can also be verified by performing the field test procedure included with the LFN9-CD. The LFN9-CD features Lead Free\* construction to comply with the Lead Free installation requirements.

### Models


**Inlet Connection:** 3/4" (20mm) standard female hose thread

**Outlet Connection:** 3/4" (20mm) standard male hose thread

### Approvals



### Dimensions and Weights

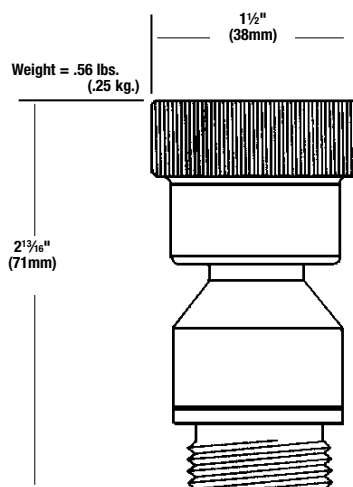

# Series 9D

## Dual Check Valve with Intermediate Atmospheric Vent

Sizes: ½" M3 (15mm), ¾" M2 (20mm)



9DM2



9DM3

### Features

- True line-sized construction allows the check modules to open further allowing dirt and debris to pass more freely reducing check fouling
- Stainless steel internal parts
- Maximum flow at low pressure drop
- Furnished with union connections to facilitate removal and replacement for maintenance
- Compact for economy combined with performance
- Design simplicity for easy maintenance
- Can be installed vertically or horizontally

### Pressure-Temperature

Temperature Range: 33°F – 250°F  
(0.5°C – 121°C)  
Maximum Working Pressure: 175psi  
(12.1 bar)  
Maximum Required Pressure: 25psi  
(172 kPa)

### 9D

Series 9D is designed to protect drinking water supplies from dangerous cross-connections in accordance with national plumbing codes and water authority requirements for non-potable service applications for smaller supply lines such as laboratory equipment, processing tanks, sterilizers, and dairy equipment. It is ideally suited for boiler feed lines to prevent backflow when supply pressure falls below system pressure.

Series 9D is suitable for use on hot or cold water and can be used under continuous pressure. It features a primary check valve utilizing a rubber disc seating against a mating rubber part to ensure tight closing. A secondary check valve utilizes a rubber disc-to-metal seating. In the event of fouling of the downstream check valve, leakage would be vented to atmosphere through the vent port thereby safeguarding the potable water system. Construction is brass body with stainless steel working parts, integral strainer and durable rubber discs. Female union inlet and outlet connections. Sizes ½" (15mm) and ¾" (20mm). Drain is ½" (15mm) thread connection.


### Materials

- Forged brass body construction
- Stainless steel internal parts
- Durable, tight seating rubber check valve assemblies

### Options


#### Suffix:

- S** – for ½" (15mm) union end solder connections  
**SC** – for satin chrome finish  
**LU** – less union

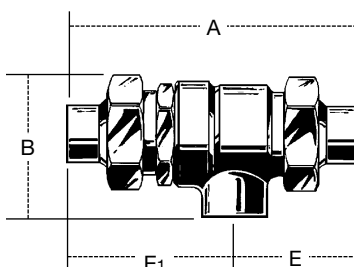

9D

### Approvals



N.Y.C. BSA 104-75-SM  
Tested and approved Conformance with Standard 1012 of the American Society of Sanitary Engineers and by all principal cities, states and areas having these requirements.

#### IMPORTANT

This valve should only be used and properly installed so that spillage of water could not cause damage. To avoid water damage due to valve operation, a drain pipe must be installed. It should terminate approximate 12" (305mm) above a floor drain or through an air gap piped to a floor drain, or other suitable place of disposal. Under no circumstances, should the vent opening or drain line be plugged.

MODEL	SIZE	DIMENSIONS								WEIGHT	
		A		B		E		E1		lbs.	kg.
		in.	mm	in.	mm	in.	mm	in.	mm		
9DM3	½"	4 <sup>15</sup> / <sub>16</sub>	125	2 <sup>9</sup> / <sub>16</sub>	65	1 <sup>15</sup> / <sub>16</sub>	49	2 <sup>9</sup> / <sub>16</sub>	65	1½	.68
9DM3-S	½"	4 <sup>3</sup> / <sub>8</sub>	111	2 <sup>9</sup> / <sub>16</sub>	65	1 <sup>15</sup> / <sub>16</sub>	49	2 <sup>9</sup> / <sub>16</sub>	65	1½	.68
9DM2	¾"	4½	114	2 <sup>9</sup> / <sub>16</sub>	65	1 <sup>15</sup> / <sub>16</sub>	49	2 <sup>9</sup> / <sub>16</sub>	65	1¾	.79
9DM2	¾"	4 <sup>13</sup> / <sub>16</sub>	122	2 <sup>9</sup> / <sub>16</sub>	65	2 <sup>1</sup> / <sub>16</sub>	52	2¾	70	1¾	.79

# Series 912HP

## High Pressure Hose Drop Backflow Preventers

Sizes: 3/4", 1" (20, 25mm)



912HP

### Features

- All bronze ball valve and brass backflow preventer
- Designed for maximum working pressure of 400psi (28 bars)
- Female national pipe thread inlet connection and male national pipe thread outlet connection
- Ball valve design includes reinforced/enhanced PTFE seats and electroless nickel plated brass ball, blow-out proof pressure retaining stem, and low profile oval handle.
- In the event of fouling of the downstream check valve, leakage would be vented to atmosphere thereby providing a visual indication of failure of the check assembly.
- Can be installed vertically (flow up or flow down) or horizontally.
- Integral stainless steel screen protects the check assemblies from fouling due to dirt and debris.

### Pressure-Temperature

Suitable for supply pressures up to 400psi (27.5 bars) and temperatures up to 180°F (82°C). May also be used at temperatures up to 200°F (93°C) and water supply pressures up to 250psi (17 bars).


### 912HP

Series 912HP High Pressure Hose Drop Backflow Preventers are specifically made for isolation protection on high pressure plumbing supply lines, such as high pressure hose drops which are used for the washdown of equipment and facilities. Ideally suited for food processing plants. Series 912HP are designed to protect drinking water supplies from dangerous cross-connections in accordance with National plumbing codes and water authority requirements for non-potable service applications.

### Materials

- Body: Brass
- Internal Metal Parts: Stainless Steel

### Dimensions and Weights

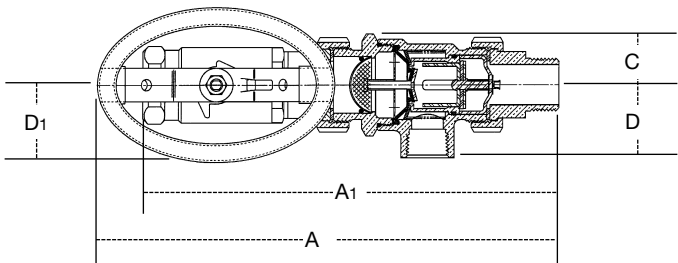

912HP

SIZE		DIMENSIONS								WEIGHT	
	A	A <sub>1</sub>	C	D	D <sub>1</sub>					lbs.	kgs.
in.	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	
3/4	9 3/16	233	8 5/16	211	1	25	1 7/16	37	1 1/2	38	3 1.4
1	10	254	9 5/16	236	1	25	1 7/16	37	1 1/2	38	4 1.8



# Series SD2 / SD3

## Dual Check Valves

Sizes: 1/4" , 3/8" (6 and 10mm)



SD2



SD3

### Features

- Certified to ANSI/NSF Standard 18, Manual Food and Beverage Dispensing Equipment
- ASSE 1032 Approved Dual Check Valve
- 316 stainless steel body for corrosion resistance
- All rubber compounds comply with FDA food additive regulations
- Streamlined body design minimizes pressure loss and cavitation
- A wide variety of custom end connections are available
- Endurance tested for more than 500,000 pumping cycle
- Shock tested for more than 100,000 pumping cycle

### Pressure-Temperature

#### SD2

Maximum Working Pressure: 200psi  
(13.8 bar)  
Maximum Required Temp.: 110°F (43°C)

#### SD3

Maximum Working Pressure: 150psi  
(10 bar)  
Maximum Required Temp.: 130°F (54°C)

\*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.

### SD2

#### LEAD FREE

The Watts SD2 is a dual check designed for the protection of the water supply from carbon dioxide gas and carbonated water. These substances can flow from post-mix beverage systems and are very acidic. If the acidic water comes in contact with copper tubing or copper pipe, it will cause the leaching of copper salts into the water supply. The dissolved copper if ingested can cause nausea, abdominal pain, and in some cases vomiting. The SD-2 prevents the reverse flow of potentially contaminated water into the potable water supply due to back pressure backflow and is used for continuous or intermittent pressure conditions. The Watts SD-2 is recommended for use on Post-Mix Carbonated Beverage Equipment and dispensing equipment for tea and coffee.

#### Models

1/4" SD2-MN: Male NPT  
3/8" SD2-MN: Male NPT  
1/4" SD2-FN: Female NPT  
3/8" SD2-FN: Female NPT  
1/4" SD2-MF: SAE Male Flare  
3/8" SD2-MF: SAE Male Flare  
1/4" SD2-FF: SAE Female Flare  
3/8" SD2-FF: SAE Female Flare

### SD3

#### LEAD FREE

Series SD3 is a dual check with atmospheric port designed for the protection of the water supply from carbon dioxide gas and carbonated water. These substances can flow from post-mix beverage systems and are very acidic. If the acidic water comes in contact with copper tubing or copper pipe, it will cause the leaching of copper salts into the water supply. The dissolved copper if ingested can cause nausea, abdominal pain, and in some cases vomiting. The SD3 prevents the reverse flow of potentially contaminated water into the potable water supply due to back pressure backflow and is used for continuous or intermittent pressure conditions. The SD3 atmospheric vent provides a visual indication of failure in the event that the downstream check fails and system backpressure exceeds the supply pressure.

The Watts SD3 is recommended for use on Post-Mix Carbonated Beverage Equipment and dispensing equipment for tea and coffee.

#### Materials

- Wye pattern strainer model for water supply installations

#### Models

1/4" SD3-MN: Male NPT  
3/8" SD3-MN: Male NPT  
1/4" SD3-FN: Female NPT  
3/8" SD3-FN: Female NPT  
1/4" SD3-MF: SAE Male Flare

#### Approvals



#### Approvals




3/8" SD3-MF: SAE Male Flare  
3/8" SD3-MF-LS: SAE Male Flare, less strainer

**Note:** The above connections are available as outlet connections only. Strainer inlet connection is always Female NPT.




cont.

Dimensions and Weights

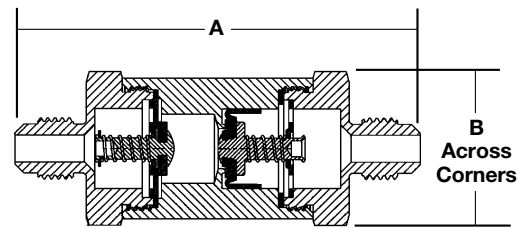

SD2

Valve Size		Assembly		Dimensions			
				A		B	
in	Part #	Order#	in.	mm	in	mm	
1/4"	SD2-MN	0061650	3	76	11/16	27	
1/4"	SD2-MF	0061651	2 13/16	71	11/16	27	
3/8"	SD2-MN	0061654	3	76	11/16	27	
3/8"	SD2-MF	0061655	3	76	11/16	27	
1/4"	SD2-FN	0061662	3	76	11/16	27	
1/4"	SD2-FF	0061660	2 13/16	71	11/16	27	
3/8"	SD2-FN	0061663	3	76	11/16	27	
3/8"	SD2-FF	0061661	3	76	11/16	27	

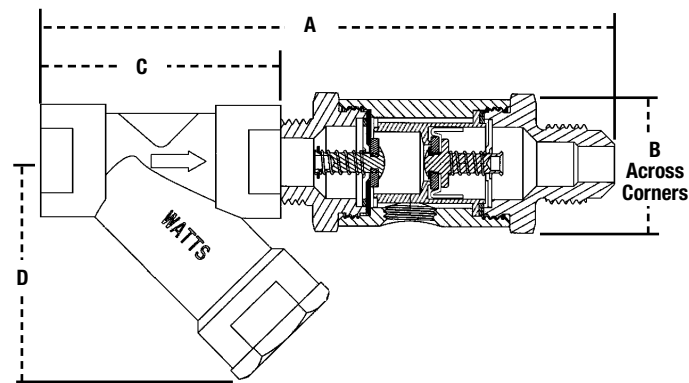

SD3

SIZE	PART # ASSEMBLY	ORDER CODE	DIMENSIONS							
			A		B		C		D	
in			in.	mm	in	mm	in	mm	in	mm
1/4"	SD3-MN	0061652	4 1/2	114	1 1/16	27	1 7/8	48	11 1/16	43
1/4"	SD3-MF	0061653	4 3/8	111	1 1/16	27	1 7/8	48	11 1/16	43
3/8"	SD3-MN	0061656	4 1/2	114	1 1/16	27	1 7/8	48	11 1/16	43
3/8"	SD3-MF	0061657	4 1/2	114	1 1/16	27	1 7/8	48	11 1/16	43
1/4"	SD3-FN	0061666	4 1/2	114	1 1/16	27	1 7/8	48	11 1/16	43
3/8"	SD3-FN	0061667	4 1/2	114	1 1/16	27	1 7/8	48	11 1/16	43
† 3/8"	SD3-MF-LS	0061671	2 5/8	67	1 1/16	27	—	—	—	—

†For use on post pumping installations only.

# Series LF7

## Dual Check Valves

Sizes: 3/8", 1 1/4" (10, 32mm)



LF7

### Features

- Can be installed vertically or horizontally
- Available with combination of inlet/outlet sizes, types or thread and end connection including retrofit compression fittings and hose connections
- Can be installed in many piping configurations and with a wide range of meter horns, copper setters and meter boxes

### Pressure-Temperature

Temperature Range: 33°F – 180°F  
(0.5°C – 82°C) continuous  
Maximum Working Pressure: 150psi  
(10.3 bar)

### LF7

#### LEAD FREE

Series LF7 Dual Check Valves are designed for non-health hazard residential water system containment and continuous pressure applications, such as the drinking water supply service entrance or individual outlets. Series LF7 uses two compact replaceable check modules and is installed immediately downstream of the residential water meter. The LF7 features Lead Free\* construction to comply with Lead Free\* installation requirements.

### Materials

- Body: LF7 Lead Free\* cast copper silicon alloy  
LF7C chrome-nickel plated Lead Free\* cast copper silicon alloy
- Check Modules: Durable plastic
- Discs: Silicone
- Seals: Buna-N
- Springs: Stainless steel

### Approvals




\*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.

Series 7: Inlet/Outlet Connections – Types available, ordering code, sizes available.

CONNECTION TYPE	CONNECTION CODE	SIZES AVAILABLE	
		in.	mm
National Pipe Thread Female	2	3/8, 1 1/4	10, 32
National Pipe Thread Male	3	1 1/4	32
Meter Thread Female*	4	1 1/4	32
Female Meter Thread (Swivel)	10	1 1/4	32

### Dimensions and Weights

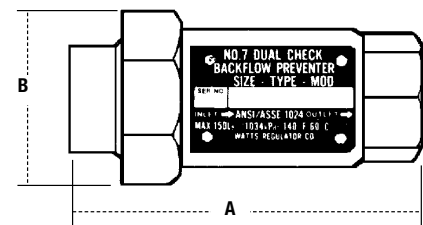

LF7

MODEL	SIZE	DIMENSIONS				WEIGHT	
		A		B		lbs.	kgs.
	in.	in.	mm	in.	mm		
LF7	3/8	2 7/8	73	1 1/4	32	.69	0.31
LF7C	3/8	2 7/8	73	1 1/4	32	.69	0.31
LF7 10-U2	1 1/4	4 9/16	116	2 1/4	57	1.80	0.82
LF7 10-U3	1 1/4	5 1/4	136	2 1/4	57	1.80	0.82
LF7 4-U2	1 1/4	4 5/16	110	2 1/4	57	1.50	0.68

# Series LF7R

## Dual Check Valves

Sizes: ½" – 1" (15 – 25mm)



LF7R

### Features

- Can be installed vertically or horizontally
- Available with combination of inlet/outlet sizes, types or thread and end connection

### Pressure-Temperature

Temperature Range: 33°F – 180°F  
(0.5°C – 82°C) continuous  
Maximum Working Pressure: 175psi  
(12.1 bar)

### LF7R

#### LEAD FREE

Series LF7R Dual Check Valves are designed for non-health hazard residential water system containment and continuous pressure applications, such as the drinking water supply service entrance or individual outlets. Series LF7R uses two compact replaceable check modules and is installed immediately downstream of the residential water meter. The LF7R features Lead Free\* construction to comply with Lead Free\* installation requirements.

### Materials

- Body: Lead Free\* copper silicon alloy
- Check Modules: Engineered plastic
- Discs: Santoprene
- Seals: EPDM
- Springs: Stainless steel

### Approvals




\*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.

Series LF7R: Inlet/Outlet Connections – Types available, ordering code, sizes available.

CONNECTION TYPE	CONNECTION CODE	SIZES AVAILABLE	
		<i>in.</i>	<i>mm</i>
National Pipe Thread Female	2	½, ¾, 1	15, 20, 25
National Pipe Thread Male	3	½, ¾, 1	15, 20, 25
Female Meter Thread (Swivel)	10	¾, 1	20, 25

Union (U) Connections available on all inlet/outlet types and sizes.

### Dimensions and Weights

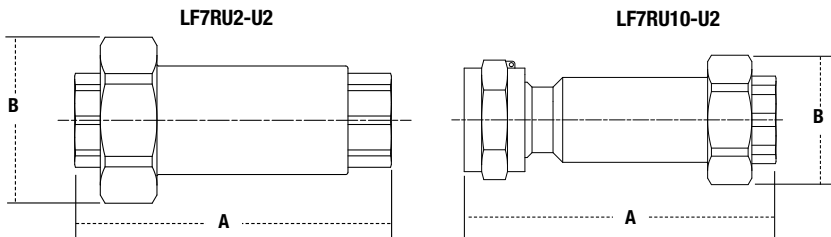

#### LF7R

MODEL	SIZE	DIMENSIONS				WEIGHT	
	<i>in.</i>	A		B		<i>lbs.</i>	<i>kgs.</i>
		<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>		
LF7RU2-2	½	3⅝	92	1⅞	48	.7	.32
	¾	3⅝	92	1⅞	48	.7	.32
	1	3⅞	99	1⅞	48	.8	.36
LF7RU2-U2	¾	3⅞	93	1⅞	48	.9	.41
LF7RU10-U2	1	4½	114	1⅞	48	1.7	.77
LF7RU10-U3	1	4⅞	122	1⅞	48	1.7	.77

# Series LF07S

## Dual Check Valves

Sizes: 1" – 2" (25 – 50mm)



1" LF07SU2-2



2" LF07SU2-2

### Pressure-Temperature

**1½" & 2"**

Max. Working Pressure: 175psi (12.1 bar)  
160psi (11.03 bar)

**1" & 1¼"**

Min. Working Pressure: 10psi (0.69 bar)  
Hydrostatic Test Press: 700psi (48.3 bar)

**1" & 1¼"**

Temperature Range: 33°F to 140°F  
(0.5°C to 60°C)

**1½" & 2"**

33°F to 180°F  
(0.5°C to 82°C)

### LF07S

#### LEAD FREE

The Watts Model LF07S Residential Fire Sprinkler Dual Check Backflow Preventer is designed for non-health hazard [i.e., pollutant] application on potable fire sprinkler service connections to protect against possible backsiphonage conditions that could inadvertently drain the fire sprinkler system.

#### Materials

- Body: Lead Free\* Brass
- Elastomers: Silicone
- O-Rings: EPDM or Buna N
- Check Modules: Engineered Plastics
- Springs: Stainless Steel

\*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.

#### Approvals

Please consult Local Governing Code for proper installation and agency code requirements,



Sizes Applicable: 1" Only



Sizes Applicable: 1", 1½" & 2" Only




All Sizes Applicable

ANSI/NFPA 13, 14, 15, 20, 22, and 24 Compliant -  
All Sizes Applicable

End Connections – National Pipe Thread  
Taper ANSI B1.20.1

### Dimensions and Weights

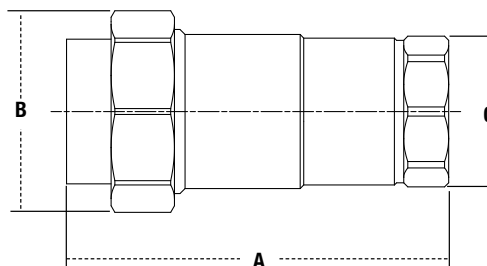

#### LF07S

SIZE	DIMENSIONS						WEIGHT	
	A		B		C			
in.	in.	mm	in.	mm	in.	mm	lbs.	kgs.
1	6¾	171	2⅓/₁₆	71	2	50	3.0	1.36
1¼	6¾	171	2⅓/₁₆	71	2	50	3.0	1.36
1½	6¾	171	3⅛/₁₆	93	2⅓/₁₆	71	3.9	1.77
2	6⅝/₁₆	176	3⅛/₁₆	93	2⅓/₁₆	71	4.4	2.0

# Series LF8 / 8

## Hose Connection Vacuum Breakers

Sizes: 3/4"



**LF8A**  
Non-Removable Model



**LFNF8**  
Permits Manual Drain



**LF8**



**8**



**8B**



**8FR**

### Features

- Brass body (all models except 8P)
- Stainless steel working parts for longevity
- Durable rubber diaphragm and disc for consistent positive seating

### Pressure-Temperature

Maximum Working Pressure: 125psi  
(8.6 bar)  
Maximum Temperature: 180°F (82°C)

### LF8

#### LEAD FREE

Series LF8 is a line of unique vacuum breakers specially made to permit the attachment of portable hoses to hose thread faucets. Designed to prevent the flow of contaminated water back into the potable water supply, these devices require no plumbing changes and screw directly onto sill cocks. The Series LF8 features Lead Free\* construction to comply with Lead Free\* installation requirements.

Series LF8 can be used on a wide variety of installations, such as service sinks, swimming pools, photo developing tanks, laundry tubs, wash racks, dairy barns, marinas and general outside gardening uses.

### Materials

- Copper silicon alloy body (all models except 8P, which is plastic)

### Models

**LF8A** – Furnished with exclusive “Non-Removable” feature and standardly equipped to allow sill cock to be drained.

**Note:** Device should only be installed on approved sill cocks containing at least four full threads. Non-removable once installed.

**LF8** – Similar to the 8A except it is furnished without the “Non-Removable” or draining feature. Secured with Allen head set screw.

**LF8B** – Furnished with break-away set screw to provide a tamper-resistant installation. Standardly equipped to allow sill cock to be drained.

**LFNF8** – Especially made for wall and yard hydrants. Permits manual draining for freezing conditions.

**8P** – Furnished with exclusive patented “Non-Removable” feature. Standardly equipped to allow sill cock to be drained. Constructed of durable, corrosion-resistant, reinforced thermoplastic. Tamper-proof feature.

**LF8AC, LF8C, or LF8C** – Same as above but furnished with chrome finish.

**LF8FR** – With freeze relief feature.

### Approvals



Series LF8, LF8A, LF8B, 8P, LF8FR and LFNF8 are listed by IAPMO.

**\*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.**

## 8

Series 8 is a line of unique vacuum breakers specially made to permit the attachment of portable hoses to hose thread faucets. Designed to prevent the flow of contaminated water back into the potable water supply, these devices require no plumbing changes, and screw directly onto a sill cock.

### For Use in Non-Potable Applications

Series 8 is designed to protect drinking water supplies from dangerous cross-connections in accordance with national plumbing codes and water authority requirements for non-potable service applications such as service sinks, swimming pools, photo developing tanks, laundry tubs, wash racks, dairy barns, marinas and general outside gardening uses.

### Models

**8A** – Furnished with exclusive “Non-Removable” feature and standardly equipped to allow sill cock to be drained.

**Note:** Device should only be installed on approved sill cocks containing at least four full threads. Non-removable once installed.

**8** – Similar to the 8A except it is furnished without the “Non-Removable” or draining feature. Secured with Allen head set screw.

**8B** – Furnished with break-away set screw to provide a tamper-resistant installation. Standardly equipped to allow sill cock to be drained.

**NF8** – Especially made for wall and yard hydrants. Permits manual draining for freezing conditions.

**8AC, 8C, 8BC or NF8C** – Same as above but furnished with chrome finish.

**8FR** – With freeze relief feature. Protects the 8FR from freeze damage.

### Approvals




Series 8, 8A, 8B, 8P, 8FR and NF8 are listed by IAPMO.

### Dimensions and Weights

#### LF8 / 8

MODEL		SIZE	DIMENSIONS				WEIGHT	
		<i>in.</i>	A		B			
			<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>oz.</i>	<i>gm.</i>
LF8, LF8C, LF8B, LF8BC	8, 8C, 8B, 8BC	¾ HT	1½	38	1⅝	35	4.0	113.4
LF8A, LF8AC	8A, 8AC	¾ HT	1½	38	1½	38	4.0	113.4
LFNF8	NF8, NF8C	¾ HT	2	51	1½	38	5.3	151.2
8P		¾ HT	1¾	38	1⅝	35	1.5	42.5
LF8FR	8FR	¾ HT	1¾	38	1¾	38	7.0	200.0





# Series LF800M4QT / 800M4QT

## Pressure Vacuum Breakers

Sizes: ½" – 2" (15 – 50mm)



½" - ¾" LF800M4QT



1" - 2" LF800M4QT

### Features

- Replaceable plastic seat
- Easy maintenance of internal parts
- Acetal bonnet acts as "freeze plug" to prevent body damage
- O-ring bonnet seal for less possibility of fouling
- Silicone seat disc for durability
- Test cocks positioned for easy testing and winterization
- Compact space saving design
- Standardly equipped with tee handle quarter turn ball valve shutoffs ½" – 1". The 1¼" - 2" feature lever handles.
- No special tools required for servicing

### Pressure-Temperature

Temperature Range: 33°F – 140°F  
(0.5°C – 60°C)

Maximum Working Pressure: 150psi  
(10.3 bar)

### LF800M4QT

#### LEAD FREE

Series LF800M4QT is designed to prevent backsiphonage of contaminated water into a potable water supply. The valve is ideally suitable for irrigation systems, industrial process water systems and other continuous pressure piping system applications where the water enters the equipment at or below its flood rim. The disc float and check valve are suitable for temperatures up to 140°F. The resilient sealing float O-ring and seal check disc are silicone rubber which is resistant to heat, shock and chemical attack. The LF800M4QT features Lead Free\* construction to comply with Lead Free\* installation requirements.

#### Materials

- Springs: Stainless Steel
- Bonnet: Celcon®
- Vent Disc: Silicone Rubber
- Disc Holder Float: Polypropylene
- Check Valve Disc: Silicone Rubber
- Check Valve Seat: Noryl® Plastic
- Body: Lead Free\* Cast Copper Silicon Alloy

#### Approvals



Approved by the foundation for Cross-Connection Control and Hydraulic Research at the University of Southern California, Manual Section 10. (½" – 2" LF800M4QT only)  
CSA (½" – 2" LF800M4QT only)

\*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.

### 800M4QT

#### For Use in Non-Potable Applications

Series 800M4QT are designed to protect drinking water supplies from dangerous cross-connections in accordance with national plumbing codes and water authority requirements for non-potable service applications such as irrigation, fireline, or industrial processing. The disc float and check valve are suitable for temperatures up to 140°F. The resilient sealing float o-ring and seal check disc are silicone rubber which is resistant to heat, shock and chemical attack.

#### Materials

- Springs: Stainless Steel
- Bonnet: Celcon®
- Vent Disc: Silicone Rubber
- Disc Holder Float: Polypropylene
- Check Valve Disc: Silicone Rubber
- Check Valve Seat: Noryl® Plastic
- Body: Bronze

#### Models

##### Prefix

U – union connections (¾" - 1" only)

#### Approvals




Approved by the foundation for Cross-Connection Control and Hydraulic Research at the University of Southern California. (½" – 2" 800M4QT only)  
CSA (½" – 2" 800M4QT only)

##### Suffix


QC – Quick-Connect Adapters

SH – Stainless Steel Ball Valve Handles

## Dimensions and Weights

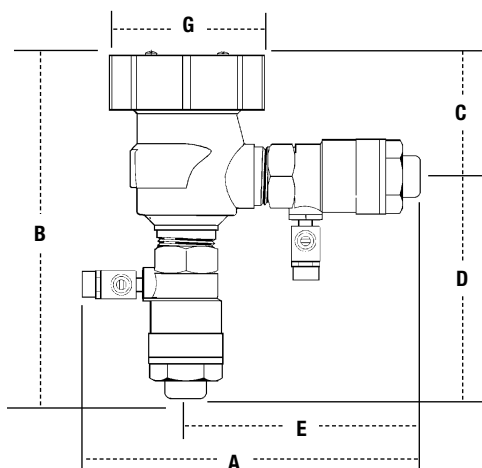

U800M4QT

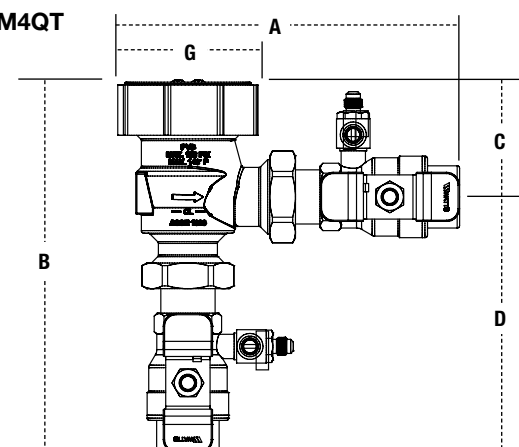

### LF800M4QT / 800M4QT / 800M4QT

MODEL	SIZE	DIMENSIONS										WEIGHT			
		A		B		C		D		E		G			
	<i>in.</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>lbs.</i>	<i>kg.</i>
LF800M4QT / 800M4QT	½	6⅞	156	6¼	159	2⅞ <sub>16</sub>	65	3⅛ <sub>16</sub>	94	3⅞	98	2¼	57	4	1.8
LF800M4QT / 800M4QT	¾	6½	165	6½	165	2⅞ <sub>16</sub>	65	3 <sup>15</sup> <sub>16</sub>	100	4⅞	105	2¼	57	4	1.8
LF800M4QT / 800M4QT	1	7½	191	7½	191	2¾	70	4¾	121	4⅞	124	3 <sub>16</sub>	87	6	2.7
LF800M4QT / 800M4QT	1¼	8⅞	225	9	229	3¼	83	5¾	146	6⅞	156	5	127	11	5.0
LF800M4QT / 800M4QT	1½	9¼	235	9½	241	3¼	83	6¼	159	6⅞	162	5	127	14	6.3
LF800M4QT / 800M4QT	2	10⅝	270	9⅝	245	3¼	83	6⅞	162	7	178	5	127	19	8.6
U800M4QT	¾	6⅜	163	7 <sup>9</sup> <sub>16</sub>	192	2⅛	55	5 <sup>7</sup> <sub>16</sub>	138	—	—	2¼	57	4	1.8
U800M4QT	1	8 <sup>5</sup> <sub>16</sub>	211	9	229	2 <sup>13</sup> <sub>16</sub>	71	6 <sup>3</sup> <sub>16</sub>	158	—	—	3 <sub>16</sub>	87	6	2.7
** 800M4QT-QC	½	7⅞	200	8	203	2 <sup>13</sup> <sub>16</sub>	71	5 <sup>7</sup> <sub>16</sub>	138	5⅝	144	3 <sub>16</sub>	87	4.5	2.0
** 800M4QT-QC	¾	8½	216	8½	216	2 <sup>13</sup> <sub>16</sub>	71	5 <sup>11</sup> <sub>16</sub>	144	6⅞	156	3 <sub>16</sub>	87	4.7	2.1
** 800M4QT-QC	1	9½	241	9½	241	2 <sup>13</sup> <sub>16</sub>	71	6¾	171	6⅞	175	3 <sub>16</sub>	87	6.6	3.0

\*\*QC models have quick-connect adapters which attach separately to the approved 800M4QT.

# Series LF800M4FR / 800M4FR

## Freeze-Resistant Pressure Vacuum Breakers

Sizes: 1/2" – 2" (15 – 50mm)



LF800M4FR



800M4FR

### Features

- Unique built-in relief valve relieves pressure caused by ice formation
- Replaceable plastic seat
- Easy maintenance of internal parts
- O-ring bonnet seal for less possibility of fouling
- Silicone seat disc for durability
- Test cocks positioned for easy testing and winterization
- Compact space saving design
- Standardly equipped with tee handle quarter turn ball valveshutoffs 1/2" – 1". The 1 1/4" - 2" features lever handles
- No special tools required for servicing

### Pressure-Temperature

Temperature Range: 33°F – 140°F  
(0.5°C – 60°C)  
Maximum Working Pressure: 150psi  
(10.3 bar)

### LF800M4FR

#### LEAD FREE

Series LF800M4FR is designed to prevent backsiphonage of contaminated water under continuous pressure into the potable water supply. Its superior design protects the valve body and internal components during sudden freeze conditions. Water inside the PVB freezes from the outside-inward.

As the ice forms and expands, causing a buildup of pressure, the LF800M4FR relieves the pressure through a unique relief valve built into the plastic float.

Test cocks are positioned at the lowest point of the valve for winterization draining. The LF800M4FR is reusable with the relief valve designed to automatically re-seat. It will not discharge through the relief valve during normal operation. (The built-in relief valve is not designed to provide freeze protection for the entire irrigation system.) The LF800M4FR features Lead Free\* construction to comply with Lead Free\* installation requirements.

#### Materials

- Springs: Stainless Steel
- Bonnet: Celcon®
- Vent Disc: Silicone Rubber
- Disc Holder Float: Polypropylene
- Check Valve Disc: Silicone Rubber
- Check Valve Seat: Noryl® Plastic
- Body: Lead Free\* Cast Copper Silicon Alloy

#### Approvals



IAMPO

Approved by the foundation for Cross-Connection Control and Hydraulic Research at the University of Southern California, Manual Section 10.

**\*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.**

### 800M4FR

#### For Use in Non-Potable Applications

Series 800M4FR is designed to protect drinking water supplies from dangerous cross-connections in accordance with national plumbing codes and water authority requirements for non-potable service applications such as irrigation, fireline, or industrial processing. Its superior design protects the valve body and internal components during sudden freeze conditions. Water inside the PVB freezes from the outside-inward.

#### Materials

- Springs: Stainless Steel
- Bonnet: Celcon®
- Vent Disc: Silicone Rubber
- Disc Holder Float: Polypropylene
- Check Valve Disc: Silicone Rubber
- Check Valve Seat: Noryl® Plastic
- Body: Bronze

#### Approvals



IAMPO

Approved by the foundation for Cross-Connection Control and Hydraulic Research at the University of Southern California, Manual Section 10. QC models are not ASSE 1020 approved.

#### Suffix


**QC** – Quick-Connect Adapters

**SH** – Stainless Steel Ball Valve Handles


#### Prefix

**U** – union connections (3/4" - 1" only)

## Dimensions and Weights

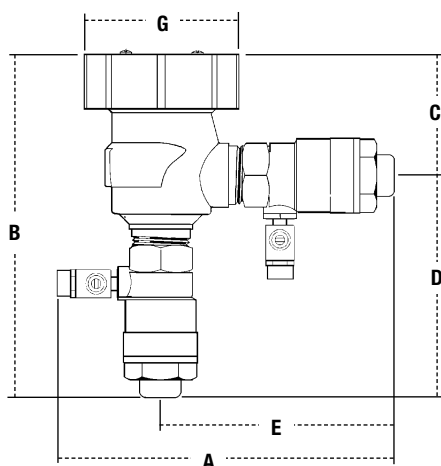

U800M4FR

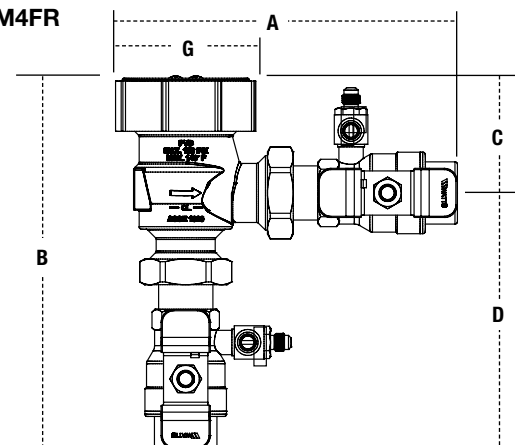

### LF800M4FR / 800M4FR / U800M4FRQC

MODEL	SIZE	DIMENSIONS												WEIGHT		
		A			B		C		D		E		G			
	<i>in.</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>lbs.</i>	<i>kg.</i>	
LF800M4FR / 800M4FR	½	6⅛	156	6¼	159	2⅞ <sub>16</sub>	65	3⅞ <sub>16</sub>	94	3⅞	98	2¼	57	4	1.8	
LF800M4FR / 800M4FR	¾	6½	165	6½	165	2⅞ <sub>16</sub>	65	3⅝ <sub>16</sub>	100	4⅞	105	2¼	57	4	1.8	
LF800M4FR / 800M4FR	1	7½	191	7½	191	2¾	70	4¾	121	4⅞	124	3⅞ <sub>16</sub>	87	6	2.7	
LF800M4FR / 800M4FR	1¼	8⅞	225	9	229	¾	83	5¾	146	6⅞	156	5	127	11	5.0	
LF800M4FR / 800M4FR	1½	9¼	235	9½	241	¾	83	6¼	159	6⅞	162	5	127	14	6.3	
LF800M4FR / 800M4FR	2	10⅝	270	9⅝	245	¾	83	6⅞	162	7	178	5	127	19	8.6	
U800M4FR	¾	6⅜	163	7⅞ <sub>16</sub>	192	2⅞	55	5⅞ <sub>16</sub>	138	—	—	2¼	57	4	1.8	
U800M4FR	1	8⅝ <sub>16</sub>	211	9	229	2⅞ <sub>16</sub>	71	6⅜ <sub>16</sub>	158	—	—	3⅞ <sub>16</sub>	87	6	2.7	
800M4FRQC	½	7⅞	199	8	203	2⅞ <sub>16</sub>	71	5⅞ <sub>16</sub>	138	5⅝	144	3⅞ <sub>16</sub>	87	4.5	2.0	
800M4FRQC	¾	8½	216	8½	216	2⅞ <sub>16</sub>	71	5⅞ <sub>16</sub>	144	6⅞	156	3⅞ <sub>16</sub>	87	4.7	2.1	
800M4FRQC	1	9½	241	9½	241	2⅞ <sub>16</sub>	71	6¾	171	6⅞	175	3⅞ <sub>16</sub>	87	6.6	3.0	

# Series LF008PCQT

## Health Hazard, Anti-Siphon, Spill-Resistant Backflow Preventer

Sizes: 3/8" — 1" (10 – 25mm)



LF008PCQT

### Features

- Standardly supplied with internal polymer coating
- Standardly supplied with Tee handles
- Available less Tee handle with stem wrench flats. For use where space is limited
- Available in left-handed or right-handed outlet
- Spill-resistant design for indoor use
- Affordable design
- Modular cartridge for ease of service
- Vent uses an O-ring for reliable operation
- Compact space saving design
- Satin chrome finish available

### Pressure-Temperature

Temperature Range: 33°F – 180°F  
(0.5°C – 83°C)  
Maximum Working Pressure: 150psi  
(10.3 bar)

### LF008PCQT

#### LEAD FREE

Series LF008PCQT is designed for indoor point-of-use applications to prevent backsiphonage of contaminated water back into the potable water supply. Separation of the water supply from the air inlet is accomplished by means of a diaphragm seal. This feature protects against any spillage during start-up or operation. The LF008PCQT features Lead Free\* construction to comply with Lead Free\* installation requirements.

### Materials


- Springs: Stainless steel
- Bonnet: PPO
- Vent Disc: EPDM
- Disc Holder: PPO
- Check Disc: Silicone rubber
- Body: Lead Free\* cast copper silicon alloy

### Approvals



\*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.

# Dimensions and Weights



## LF008PCQT

SIZE		DIMENSIONS				WEIGHT		
	B		D		E			
<i>in.</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>lbs.</i>	<i>kgs.</i>
3⁄8	5½	140	3¹⁵⁄₁₆	100	3⅜	79	1.6	.73
½	5¾	146	4³⁄₁₆	106	3⅝	86	1.7	.77
¾	7	178	4⅝	117	4½	114	3.8	1.72
1	7½	191	5⅛	130	4⅞	124	4.8	2.18

# Series LF288A, LF289, LFN388 and 188A

## Anti-Siphon Vacuum Breakers

Sizes: 1/4" – 3" (6 – 80mm)



LF289



LFN388



188A

### Features

- Spring loaded vent for continuous pressure use
- Patented design
- Spill-resistant diaphragm design for indoor use
- Affordable design
- Modular cartridge for ease of service
- Vent uses an O-ring for reliable operation
- Compact space saving design
- Meets ASSE 1001 (3/8" and 1/2" only)
- Optional satin chrome finish
- Full size orifice for maximum flow
- Lightweight disc assembly prevents spilling under all rates of flow

### Pressure-Temperature

#### LF288A

Temperature Range: 180°F (82°C)  
Maximum Working Pressure: 125psi  
(8.6 bar)

#### LF289

Temperature Range: 33°F - 180°F  
(0.5°C - 82°C)  
Maximum Pressure: 150psi  
(10.3 bar)

#### LFN388 and 188A

Maximum Temperature: 180°F (82°C)  
Maximum Working Pressure: 125psi  
(8.6 bar)

### LF288A, LF289, and LFN388

#### LEAD FREE

Series LF288A, LF289, and LFN388 represent a complete line of vacuum breakers designed to prevent backsiphonage of contaminated water into a potable water supply.

They feature a lightweight, durable "disc float" suitable for temperatures up to 180°F (82°C) which closes the atmospheric vent to prevent spilling under all rates of flow. Therefore, they are ideally recommended for low flow installations such as laboratory equipment which use such a small amount of water. They also contain a durable silicone disc which has high heat and water hammer shock resistance and assures tight seating with the lightest of seating contact. The LF288A, LF289, and LFN388 feature Lead Free\* construction to comply with Lead Free\* installation requirements.

### 188A

#### For Use in Non-Potable Applications

Series 188A is designed to protect drinking water supplies from dangerous cross-connections in accordance with national plumbing codes and water authority requirements for non-potable service applications such as irrigation, fireline, or industrial processing. Features a lightweight, durable "disc float" suitable for temperatures up to 180°F (82°C) which closes the atmospheric vent to prevent spilling under all rates of flow.

### Materials

#### LF288A 1/4" - 3" (6 – 80mm)

- Body: Lead Free\* cast silicon copper alloy
- Disc: Silicone

#### LF289 3/8" - 3/4" (10 – 20mm)

- Springs: Stainless Steel
- Bonnet: PPO
- Vent Disc: EPDM
- Disc Holder: PPO
- Check Disc: Silicone Rubber
- Body: Lead Free\* Bronze cast silicon copper alloy
- Diaphragm: EPDM

#### LFN388 1/4" - 3/8" (6 – 10mm)

- Body: Lead Free\* cast copper silicon alloy
- Disc: Silicone

#### 188A 3/4" - 2" (20 – 50mm)

- Body: Brass
- Internal Trim: Bronze
- Seat Disc: Silicone
- Disc Float: Plastic

### Models

**LF288A-C** – Lead Free\* brass body and polished chrome finish

**LFN388-SC** – Satin Chrome

**LFN388-C** – Polished Chrome

**LFN388-DM** – Deck Mount

### Approvals

#### Model LF288A




Certified thru 1" CSA

#### Model LF289



3/8" and 1/2" only

#### Model LFN388



#### Model 188A




Approved by the city of Los Angeles

\*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.




## Dimensions and Weights




### LF288A

SIZE			DIMENSIONS						WEIGHT	
	A		B		C		D			
<i>in.</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>oz.</i>	<i>gm.</i>
¼	1¾	44	2¼	57	1¼	32	1	25	6	170
⅜	1¾	44	2¼	57	1¼	32	1	25	6	170
½	2	50	2¾	70	1½	38	1¼	32	8	227
¾	2¼	57	3	76	1½	38	1½	38	18	510
1	2⅞	73	3⅝	92	1⅞	48	1¾	44	28	794
1¼	2⅞	73	3¾	95	1⅞	48	1⅞	48	34	964
1½	3⅝	92	4½	114	2¼	57	2¼	57	54	1531
2	4	100	5⅞	130	2⅝	67	2½	64	84	2381
2½	6½	165	7½	191	4½	114	3	76	256	7258
3	6½	165	8	200	4⅝	117	3⅞	86	274	7768

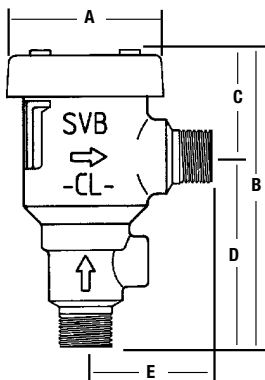

### LF289

SIZE		DIMENSIONS						WEIGHT	
	A	B	C	D	E				
<i>in.</i>	<i>in. mm</i>	<i>in. mm</i>	<i>in. mm</i>	<i>in. mm</i>	<i>in. mm</i>	<i>lbs.</i>	<i>kg.</i>		
¾	2 50	3¾ 95	1⅜ 35	2⅝ 60	1½ 38	.9	.4		
½	2 50	3¾ 95	1⅜ 35	2⅝ 60	1½ 38	1	.4		
¼	3¾ 95	5 127	2½ 64	2½ 64	2⅝ 60	3	1.4		

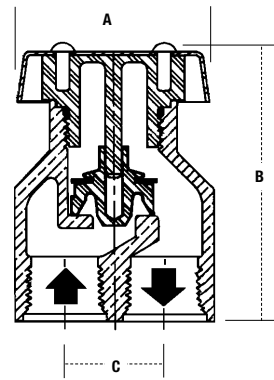


### LFN388

SIZE		DIMENSIONS				WEIGHT	
<i>in.</i>	<i>in.</i> <i>A</i> <i>mm</i>	<i>in.</i> <i>B</i> <i>mm</i>	<i>in.</i> <i>C</i> <i>mm</i>	<i>lbs.</i>	<i>kg.</i>		
¼	1¾      44	2⅝ <sub>16</sub> 59	¾      19	.50	.2		
⅜	1¾      44	2⅜      60	⅞      22	.75	.3		


### 188A

SIZE		DIMENSIONS						WEIGHT	
in.		in.	mm	in.	mm	in.	mm	lbs.	kg.
3/4		2 1/4	57	1 7/8	48	1 1/2	38	1.13	.51
1		2 7/8	73	2 1/8	54	1 11/16	43	1.75	.79
1 1/4		2 7/8	73	2 1/8	54	1 13/16	46	2.13	.96
1 1/2		3 5/8	92	2 7/16	62	2 3/16	56	3.63	1.64
2		4 1/8	105	2 7/8	73	2 1/2	64	5.25	2.38



# Series WB

## WattsBox Insulated Enclosures

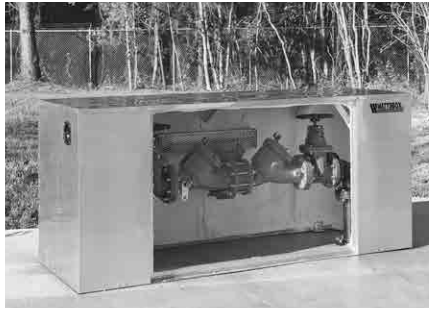

WattsRock  
Enclosure



### Features

- Designed to eliminate valve vault entry requirements of OSHA confined Space Ruling 29CFR 1910.146.
- Single source Watts Regulator warranty of the enclosure, the backflow preventer, and the heat source.
- Allows for the installation of the backflow preventer "at the service connection" in accordance with AWWA Standards.
- Is specifically designed to meet NFPA guidelines.  
The enclosure provides freeze protection to maintain the water supply to the property's fire protection system. (NFPA 3-3.1.8 and 3.6.1.3.2).
- Strategically placed doors provide access to the backflow prevention assembly for testing and repair without removal of the entire unit.
- An economical alternative to expensive retrofit installations.
- Eliminates potential drainage constraints in existing equipment rooms.
- Saves valuable floor space.
- Standardly furnished with thermostatically controlled heat source for freeze protection down to -30°F.
- Contains no structural wood or particle board for long life.
- Easy installation aluminum enclosures feature interlocking panels which eliminate the use of screws during assembly.
- Can be temporarily removed for replacement of the backflow preventer without the need for replacement of freeze protection services.
- ASSE 1060 Certified (Consult factory for approved models)

Backflow prevention assemblies subjected to potential freezing conditions shall be protected with the WattsBox enclosure as shown.

The enclosure shall be of reinforced aluminum construction, providing access through doors for testing/certification purposes. It must also be totally removable for maintenance purposes. The enclosure shall be structurally lined with a unicellular, non-wicking insulation consisting of a sandwich laminate or applied by spray. It shall contain a thermostatically controlled heat source mounted to the interior wall or on the backflow preventer to provide protection to -30°F. No wood or "particle board" shall be allowed in assembly. Insulation mounted with glue will be cause for rejection. Power source will be protected with a ground fault circuit interrupting receptacle, UL Standard 943, NEMA 3R, installed by others, inside the box.

The enclosure shall contain drain openings sized to accommodate the maximum discharge of the reduced pressure zone assembly. Drain openings shall open to discharge under the most severe conditions. These openings are protected against intrusion of either wind, debris or animal. The enclosure is provided with means of permanent anchor and "lockable" access doors and/or lid to prohibit theft or vandalism.


All "wet" portions of the backflow prevention assembly shall be protected within the enclosure. Fire department hose connections and OSY indicating valve handles shall be maintained outside the enclosure.

The enclosure shall be factory assembled and delivered to the site ready to install with no drilling, screwing or riveting of enclosure required on site. The enclosure and the backflow preventer shall be covered by a single warranty policy. Enclosure shall be a Watts Series WattsBox.

# Series TWS

## Key Operated Wall Hydrants for irrigation system winterization

Sizes: 3/4" – 1" (20 – 25mm)

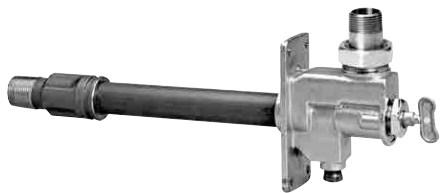

TWS

### Features

- Eliminates delays and multiple visits to gain interior access to irrigation equipment
- Standardizes location of supply shutoff valve and drain connection
- Access available anytime for winterizing
- Durable bronze valve body and shaft
- One piece valve plunger
- Tamper resistant key operated hydrant
- Exterior chrome finish
- Resilient seated shutoff
- Union connection for ease of installation of backflow preventer
- Manual drain port

### Pressure-Temperature

Temperature Range: 33°F – 140°F  
(0.5°C – 60°C) continuous,  
180°F (82°C) intermittent  
Maximum Working Pressure: 175psi  
(12.1 bar)

### TWS

Series TWS Key Operated Wall Hydrants have been specifically designed to provide outside access to a building water supply for start-up, winterizing, and servicing of irrigation sprinkler systems (non-potable service applications). The TWS is located outside of the home reducing the time spent on service calls. There is no need to locate the inside shutoff valve or the drain connection. Deploying the TWS wall hydrant enables the irrigation contractor to winterize an irrigation system at anytime thereby protecting the contractors' warranty and the homeowners' investment.

### Materials

- Chrome plated bronze valve head.
- Brass shaft with threaded end.
- Resilient seated shutoff.

### Dimensions and Weights

#### TWS

MODEL	DISTANCE (DM)		PIPE LENGTH		STEM LENGTH	
	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>
TWS-8	8	200	9	229	12 <sup>5</sup> / <sub>16</sub>	313
TWS-10	10	250	11	279	14 <sup>5</sup> / <sub>16</sub>	364
TWS-12	12	300	13	330	16 <sup>5</sup> / <sub>16</sub>	389

# Series SS07F

## Stainless Steel Single Detector Check Valves

Sizes: 4" – 10" (100 – 250mm)



SS07F 4", 6"



SS07F 8", 10"

### Features

- Lightest weight in the industry – reduces shipping and handling costs
- Non-corrosive stainless steel construction – eliminates pin holes and voids associated with epoxy coated valves
- Can be installed in horizontal/vertical positions
- Optional meter bypass assembly (specify GPM or CFM). Required to detect leakage or theft of water
- Optional sized bypass tapings available

### Pressure-Temperature

Temperature Range: 33°F – 110°F  
(0.5°C – 43°C)  
Maximum Working Pressure: 175psi  
(12.1 bar)

### SS07F

#### For Use in Non-Potable Applications

Series SS07F Stainless Steel Single Detector Check Valves are designed to protect drinking water supplies from dangerous cross-connections in accordance with national plumbing codes and water authority requirements for non-potable service applications such as irrigation, fireline, or industrial processing. They are designed to detect any leakage or unauthorized use of water from fire sprinkler systems. During times of minimal water flow, the valve clapper remains closed so that the water flows through a bypass meter (optional). When fire flow is required, the increased demand will open the clapper to allow full flow.

### Materials

- Body: 300 Series stainless steel
- Linkage Parts: stainless steel

### Approvals





(8" & 10" sizes only)

Flange bolt pattern and hole diameter in accordance with ANSI B16.5 Class 125/ AWWA C207 Class D.

Body nameplate provides nominal size, direction of flow, psi rating, year of manufacture and approval marks.

### Dimensions and Weights

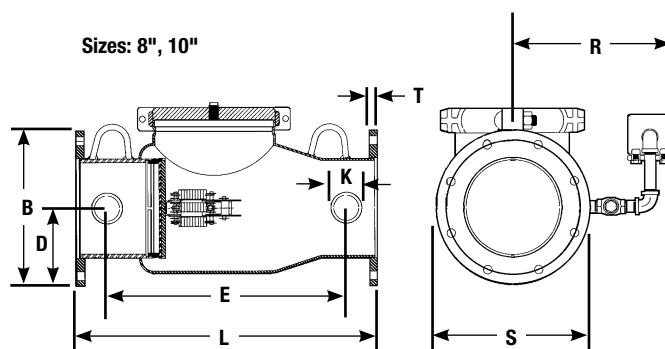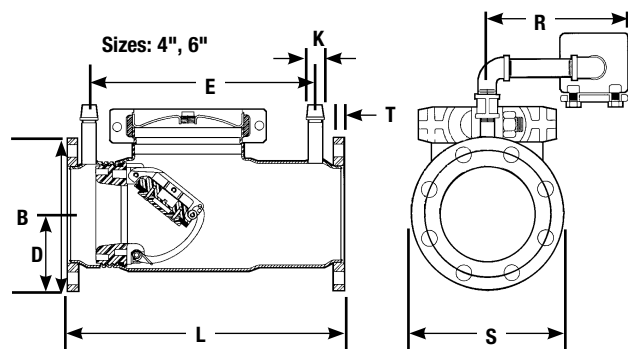

### SS07F

SIZE		DIMENSIONS										WEIGHTS								
	B		D		E		K (NPT)		L		R		S		T		less Bypass		with Bypass	
<i>in.</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>lb.</i>	<i>kg.</i>	<i>lb.</i>	<i>kg.</i>
4	11½	292	4½	114	12⅞	327	½	13	16½	419	8	203	9	229	⅝	16	30	13.6	35	15.9
6	13½	343	5½	140	17	432	¾	19	22½	572	10½	267	11	279	1⅞	17	65	29.5	70	31.8
8	15½	394	6¾	171	21¼	540	2	51	26½	673	12¼	311	13½	343	1⅞	17	143	64.9	153	69.3
10	17½	445	8	203	28¾	718	2	51	36	914	14½	368	16	406	1⅞	17	163	73.9	173	78.5

# Test Kits

## Model TK-7



- Water column sight tube for testing dual check and double check valves.
- Tests individual check modules of the Watts Model 7, 709, LF709, 007 and LF007.

For additional information, request literature IS-TK7 or PG-TK.

MODEL	WEIGHT	
	lbs.	kgs.
TK-7	5	2.3

## Model TK-9A



- $\pm 2\%$  accuracy full scale
- Test kit easily connects to any testable backflow preventer assembly.
- Designed for testing all testable back-flow preventers.

Maximum pressure 175psi (12.1 bar).  
Maximum temperature 210°F (98.9°C).

For additional information, request literature IS-TK9A or PG-TK.

MODEL	WEIGHT	
	lbs.	kgs.
TK-9A	8	3.6

## Model TK-99D



- Features 0.25% full scale accuracy.
- Compact, hand held, digital backflow preventer test kit.
- LCD display with oversized differential characters and separate supply pressure readout gauge, high impact casing.
- Tests RPZ's, Double checks or PVB's.

For additional information, request literature IS-TK99D or PG-TK.

MODEL	WEIGHT	
	lbs.	kgs.
TK-99D	3	1.4

## Model TK-99E



- $\pm 1\%$  accuracy full scale.
- Compact test kit with color coded valves, hoses and top mounted bleed valves.
- Designed for testing all testable back-flow preventers.

For additional information, request literature IS-TK99E or PG-TK.

MODEL	WEIGHT	
	lbs.	kgs.
TK-99E	8	3.6

## Model TK-DL

With Digital Print-Out and Computer Download Capability



- $\pm 0.2\%$  accuracy full scale.
- An advanced piece of test equipment designed to make pressure and differential gauges obsolete in the testing of backflow preventers.
- Accuracy, portability, versatility and documentation.
- Contains hoses, adapters, digital print-out unit and a rugged case.

MODEL	WEIGHT	
	lbs.	kgs.
TK-DL	15	6.8

# Test Cocks



## LFTC

For use with backflow preventers, isolation valve for gauges, isolation valves for small equipment lines.

### Features

- Full port ball valve design
- Screwdriver slot to open and close
- Available 1/8" M x 1/4" F or 1/4" M x 1/4" F



## LFSAE-TC

### Features

- Full port ball valve design
- Screwdriver slot operation
- Available 1/8" M x SAE



## SAE-TC Adapter

### Features

- 1/4" female SAE x 7/16" FPT
- Adapts to SAE-TC for use with pressure gauge and/or site tube



## SilverEagle LFTC

### Features

- 1/2" TC for 2 1/2" – 4" (65 – 100mm) series 757 and 957
- 3/4" TC for 6" – 10" (150 – 250mm) series 757 and 957
- Full port ball valve design

## SilverEagle No. 3 LFTC with O-Ring

### Features

- for 2 1/2" – 4" (65 – 100mm) series 757 and 957
- for 6" – 10" (150 – 250mm) series 757 and 957

# Cap & Tether



## Plastic Cap & Tether

(four required per backflow preventer)

- Fits 1/4" Female test cocks
- Plastic dust cap and rubber tether

## SAE-TC Brass Cap

- Protects SAE-TC from dirt and debris



## Brass Cap & Plastic Tether



(four required per backflow preventer)

- Fits 1/8" M x SAE test cocks
- Brass dust cap with O-ring seal and rubber tether

# Air Gaps and Elbows

## for Reduced Pressure Zone Assemblies

Sizes: 1/4" – 10" (6 – 250mm)

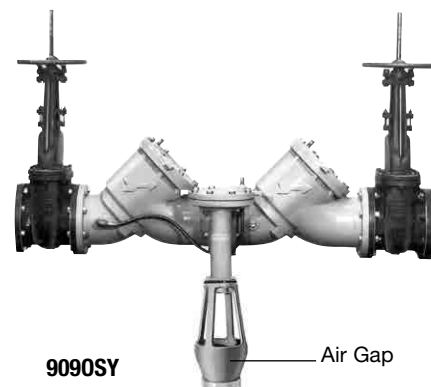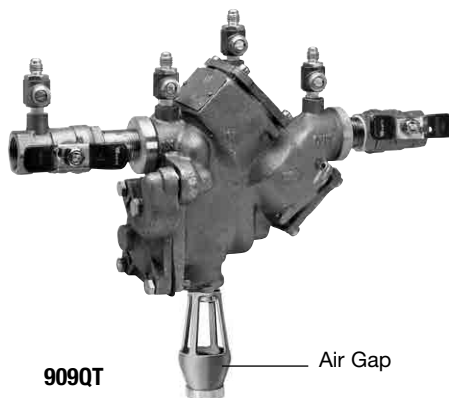

### Features

#### Horizontal Air Gaps

- Remove two of the relief valve capscrews 180° apart.
- Remove the relief valve hose from fitting below inlet ball valve.
- From the top of the air gap, thread the relief valve hose down and out the slot.
- Use 1/4" - 20 UNC x 1" long stainless steel screws.
- Reconnect relief valve hose to the fitting below the inlet ball valve.

#### Vertical Air Gaps



- Detach the sensing line from the inlet ball valve and the elbow on the relief valve.
- Remove the elbows from the relief valve base.
- Hang the Air Gap Drain on the body of the relief valve
- Reinstall the elbow into the base of the relief valve to hold the Air Gap drain in place.
- Install the rigid fitting end of the sensing line to the elbow on the base of the relief valve and the swivel end to the fitting on the ball valve.

### Air Gaps

An air gap provides the unobstructed, physical separation between the discharge end of a potable water supply line and an open receiving vessel. The installation of an air gap and drain line are recommended.

### Vent Elbows

Used with Watts air gaps for vertical installation of Reduced Pressure Zone Assemblies.

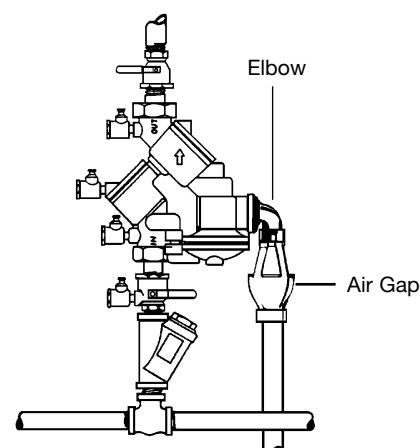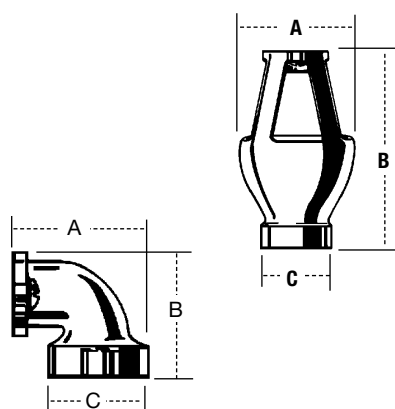

MODEL	ORDERING CODE	SERIES/ SIZES	DIMENSIONS						WEIGHT	
			A		B		C (NPT)			
			in.	mm	in.	mm	in.	mm	lbs	kgs
909AGA	0881399	½" – ½" 009/LF009, ¾" 009/LF009M2/M3, ½" – 1" 995	2⅝	60	3⅝	79	½	13	.63	.28
909AGC	0881376	¾" – 1" 009/LF009, 909/LF909, 1" – 1½" 009/LF009M2, 1¼" – 2" 995	3¼	83	4⅞	124	1	25	1.50	.68
909AGF	0881378	1¼" – 3" 009/LF009, 909/LF909, 1¼" – 2" 009/LF009M1, 2" 009/LF009M2	4⅜	111	6¾	171	2	51	3.25	1.47
909AGK	0881385	4" – 6" 909/LF909, 4" – 10" 909RPDA, 8" – 10" 909/LF909M1	6⅝	162	9⅝	244	3	76	6.25	2.83
909AGM	0881387	8" – 10" 909/LF909	7⅝	187	11¼	286	4	102	15.50	7.03
919 AGC	0881576	¾"-1" 919/LF919	2⅝	60	3 ⅞	79	½	13	0.63	0.28
919 AGF	0881577	1¼"-2" 919/LF919	4⅜	111	8 ½	216	2	51	3.5	1.6
957AG	0111764	2½" – 10" 957	7½	190	10⅞	258	2	51	1.50	.68
Splash Guard										
994AGK-P	0881397	2½" – 10" 994	8	203	11¼	286	2	51	1.50	0.68
995-AG	0439190	3" – 6" 995	5	127	8	203	2	51	–	–
957AG	0111815	2½" – 10" 957	4⅜	119	2½	62	–	–	.4	0.18
MODEL	MATERIAL	ORDERING CODE	SERIES/ SIZES		DIMENSIONS				WEIGHT	
					A	B	C			
					in.	mm	in.	mm	in.	mm
909EL-A	Bronze	0881370	¼"-½" 009/LF009, ¾" 009/LF009M2/M3, ½"-1" 995		—	—	—	—	—	—
909EL-C	Iron	0881380	¾"-1" 009/LF009, 909/LF909, 1"-1½" 009/LF009M2, 1¼"-2" 995		2⅝	60	2⅝	60	—	—
909EL-F	Gray Cast Iron with Zinc Phosphate Primer	0881382	1¼"-2" 009/LF009M1, 1¼"-2" 009/LF009, 909/LF909, 2" 009M2		3⅝	92	3⅝	92	—	—
909EL-H		0881384	2½"-3" 009/LF009, 909/LF909		—	—	—	—	2	51
919 EL-C	Bronze	0881578	¾"-1" 919/LF919		2¼	57	2 ⅝	67	—	—
919 EL-F	Cast Iron	0881579	1¼"-2" 919/LF919		5¼	133	4	102	—	—
994EL-F	Steel Epoxy Coated	0881396	2½"-10" 994		4⅞	124	9	229	2	51
									4	1.8

For additional information, request literature ES-AG/EL/TC.



# Spools and Flanges for Retrofitting Backflow Preventers

Sizes: 2½" – 10" (65 – 250mm)

## Spools

**LEAD FREE** Watts offers created "Make up" Spools for use when retrofitting a backflow preventer into the longer lay length of an existing assembly. Watts spools are available in lightweight 300 series stainless steel or epoxy coated carbon steel and come standard with AWWA 150# class "D" carbon steel flanges. 150# class "D" stainless steel flanges available upon special request.

## Flanges

**LEAD FREE** Watts offers created "Make up" Flanges for use in piping applications where there is a need for additional fitting lay length. Watts flanges are available in three styles:

- AWWA 150# modified class "D" Zinc plated carbon steel with standard bolt pattern
- AWWA 150# modified class "D" Zinc plated carbon steel flanges with standard pattern slotted
- AWWA 150# modified class "D" stainless steel flanges with standard bolt pattern

The W-SPL and W-FLG feature Lead Free\* construction to comply with Lead Free\* installation requirements.



Spools

\*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.

## Series WVS

### Valve Setters – Used with Watts Silver Eagle™ N-Shape Assemblies

Sizes: 3" – 10" (80 – 250mm)



FLxFL

## Features

- Corrosion resistant fusion epoxy coated.
- Eliminates the need for thrust blocks or other restraints at the point of installation.
- Flanges: ANSI B16.1 Class 125 (Standard)  
ANSI AWWA C153 A21.53-88

## Pressure-Temperature

Temperature Range: 33°F – 110°F  
(0.5°C – 43°C)  
Maximum Working Pressure: 175psi  
(12.1 bar)

## WVS

**LEAD FREE** The Watts Series WVS valve setters are designed to augment the installation of the "N" series backflow prevention valves. The Series WVS are available in three connection options, Flange by Flange, Mechanical Joint by Flange, and Mechanical Joint by Mechanical Joint. They are constructed of fusion epoxy coated ductile iron. Integral ductile iron support between elbows transfers thrust downstream, thus eliminating thrust block requirements between elbows. Mechanical joint restraint devices may be used at the pipe connections, depending on local conditions.

## Materials

- Body: Ductile iron A536 GR 65-45-12
- Coating: Fusion epoxy coated internal and external AWWA C550
- Bolts & Nuts: Stainless steel

**Note:** Mechanical joint accessories, flange bolts and gaskets are not included (except for center joints).

## Models

**FLxFL** - Flange by Flange  
**MJxFL** - Mechanical Joint by Flange  
**MJxMJ** - Mechanical Joint by Mechanical Joint

\*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.

# Series TR

## Transition Risers

Sizes: 4" – 10" (100-250mm)



TR

### Features

- Cost savings
- Corrosion resistant stainless steel construction, type 304
- Ease of installation and lightweight allow one person to position and handle the riser
- Minimal site preparation; joint restraint one-piece construction reduces time and labor; no missing parts, no leaks; easily identifiable for approvals
- Includes Test Cap and Coupler
- UL and FM approved
- Sizes: available in 4" – 10" (100-250mm) with various lengths to meet all local requirements
- Designed to meet NFPA 24-2007 Section 10.6.5
- AWWA C900 Inlet/DIP
- AWWA C606 Outlet

### TR


**LEAD FREE** Series TR Transition Risers are used to connect the main fire supply to the building overhead fire system. The fitting passes under the foundation without joints and extends up through the floor. Provided with installation tabs, the unit has a CIPS (Cast Iron Pipe Size) coupler for easy connection to the underground supply (AWWA C900 PVC and Ductile Iron Pipe) and industry standard grooved-end connection (AWWA C606) on the building side for easy connection to the overhead fire sprinkler system.

### Approvals

Fittings UL HKQA (4"-10")



### Dimensions and Weights

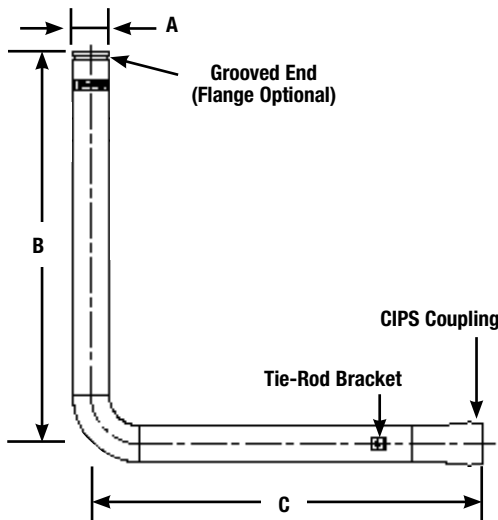


SIZE			WEIGHT			
in.	A (OD) in. mm	B ft. cm	C ft. cm	lbs.	kg	
4	4½ 114	6 183	6 183	71	32	
6	6⅝ 168	6 183	6 183	98	44	
8	8⅝ 219	6 183	6 183	129	59	
10	10¾ 273	6 183	6 183	202	92	

Consult factory for custom leg dimensions.

# Series PVS-1000

## Pre-engineered Valve Stations

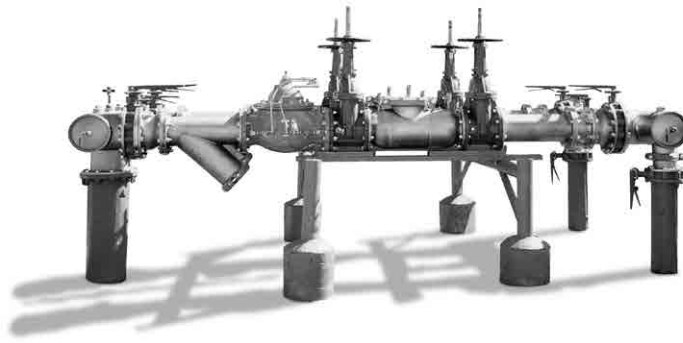

PVS1000

### Features

- Maximum flow performance with low pressure drops
- Wide flow control ranges meet standard and emergency peak flow requirements
- Standard flow design to >10,000 gpm
- Integral backflow prevention devices, meter, pressure regulators, automatic control valves, strainers, headers, shutoff valves, and instrumentation as needed to suit specific applications
- UL/FM, ASSE, IAPMO, USC certified or listed components as required for service
- Single point of connection for fire protection, potable water and irrigation services (where approved by local codes)
- Standard vault, vertical, and horizontal mounting configurations
- Integral slip and alignment flanges correct for site variations and relieve pipe stress
- Field proven in over 100 installations and years of history
- Expansion capability
- Built-in protection for system upsets (i.e. seismic shocks)

### PVS-1000

Series PVS-1000 Pre-Engineered Valve Stations are custom configured water flow control systems that are assembled from proven, reliable Watts components to meet exacting project application requirements. Watts pre-engineered valve stations are factory pre-assembled, tested and optionally certified by independent agencies to ensure flow performance for critical building demands.

### Benefits

Watts pre-engineered valve stations provide the following benefits:

- Reduction of installation time from days to hours, minimizing installations costs
- Redundant flow paths provide uninterrupted water flow while device is being tested or maintained, reducing overtime labor costs
- Operates below OSHA mandated maximum noise levels
- Corrosion resistant design reduces component maintenance costs
- Optional pre-installation performance certification ensures conformance to design criteria at site
- Reduction in the number of overall components needed through Watts' innovative design program
- One supplier of components, one source of responsibility, Watts, a leader in valve technology for over 130 years

### Applications

Watts pre-engineered valve stations are custom fit to your specifications and are ideal for a wide variety of flow control applications including:

- Hospitals
- Schools
- Multi-Family Dwellings
- Restaurants
- Industrial Facilities
- Other similar buildings

# Series BIC-1000

## Backflow Irrigation Control Stations



**BIC-1000**

### Features

- **Preload Pilot.** The entire irrigation pressure piping system is maintained with a preload stand-by, field adjustable, low pressure control valve. This in combination with a higher set point on the regulator and master valve creates a buffer when turned on.
- **High-Pressure Lockout Switch.** When high pressure is detected, the switch will lock out the 24V circuit; making the system inoperable until the problem is addressed. This prevents high pressure shock and water hammer when the system is allowed to turn on.
- **All components are flanged type, nut and bolt modular design for easy replacement.**
- **24-hour monitoring system of the outlet pressure for excessive buildup above set operating pressure.**
- **Water is conserved by reducing or eliminating potential line breaks caused by high pressure.** The master valve/regulator is installed at the backflow assembly which provides a shut-off and pressure control of the entire system.

### BIC-1000

Series BIC-1000 Backflow Irrigation Control Stations combine the master valve, regulator valve, backflow preventer, preload valve and high-pressure lockout switch all in one easily located component. Constructed using best practice design principles, these systems maximize operating performance and reduce pipe breaks and leakage within the irrigation system. Watts BIC-1000 station minimizes system-operating pressure during both the system operation as well as when there is no flow to the system to reduce water line breaks, has a single warranty policy and is pre-tested to ensure reliable operation “out of the crate”.

### System Attributes

- All components are above ground level on a stainless steel station
- Combines the Master Valve, Regulator Valve, and Backflow Assembly in one easily located component

# Series FR 500

## Thermostatic Freeze Relief Kits

Sizes: 1/8", 1/4", 1/2" and 3/4" (3 – 20mm)



1/8" and 1/4"



1/2" and 3/4"

### Features

- Compact
- Easy to Install
- Low Maintenance
- Controlled by Water Temperature vs. Air Temperature
- IAPMO Approved

### FR 500

Series FR 500 Thermostatic Freeze Relief Kits are designed to keep water from freezing in the backflow preventer, while avoiding discharges based on the air temperature dropping below freezing. Series FR 500 thermostatically measures the water temperature and opens at 35°F (1.6°C) and closes at 40°F (4.4°C).

### Materials

- Body: Bronze
- Springs: Stainless Steel
- Internals: DZR Brass

### Approvals




IAPMO


### Pressure-Temperature

Temperature Range: 35°F (1.6°C)  
Maximum Pressure: 175psi (12.1 bar)

### Dimensions

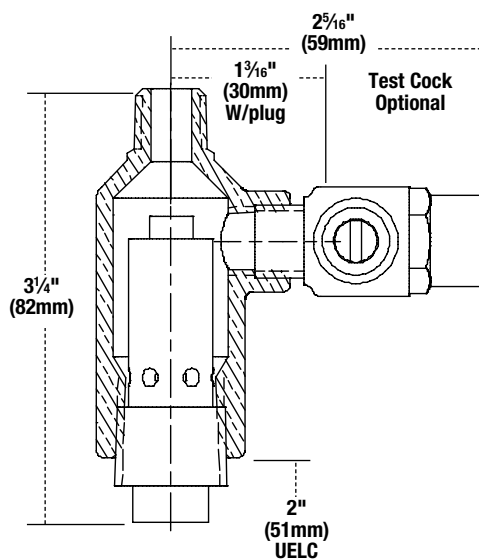

Sizes: 1/8" and 1/4" (3 and 8mm)

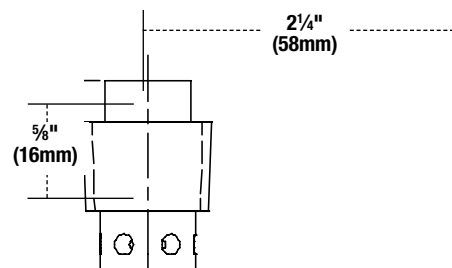

Sizes: 1/2" and 3/4" (15 and 20mm)

# Guide to Options

## Hydrant Connections – HC

The hydrant connection option is designed to prevent backflow of contaminants from tank and truck filling operations. A fire hydrant should be considered an open conduit to the water supply system and as such should be protected from actual or potential cross-connections that can occur. While fire hydrants are normally considered to be safety devices for fire fighting purposes, the growing use of them to supply water for construction sites, roadwork, street cleaning equipment and hydroseeding, can lead to the possible contamination of the water supply.


Available on series: 2" 007, 009



## Internal Polymer Coating – PC

The internal polymer coating option provides extended corrosion protection on sensitive sealing areas and machined surfaces. The coating ensures the smooth operation of the sliding and moving parts and common problems such as pitting, mineral build ups and galling are negligible even after lengthy periods in extremely corrosive water conditions.

Available on series: 007, LF008, 009



## Elbow Fittings for 360° Rotation – AQT

The AQT elbow fittings for 360° rotation option allows the installer to pivot the valve's inlet and outlet in the direction of the piping since often times they do not align exactly. This option provides great flexibility to the installer and saves space, time, materials and money.


Available on series: 009, 919



# Shutoff Valve Options

Watts offers a variety of different shutoff valve options and combinations to meet most any installation requirements. Shutoff valve options include: grooved and flanged OSY & NRS gate valves, valves with 2" operating nut and post indicator plate and grooved butterfly valves.












Available on series: 757, 774, 774X, LF757DCDA, 757DCDA, 774DCDA, 774XDCDA, 957, 994, LF957RPDA, 957RPDA, 994RPDA

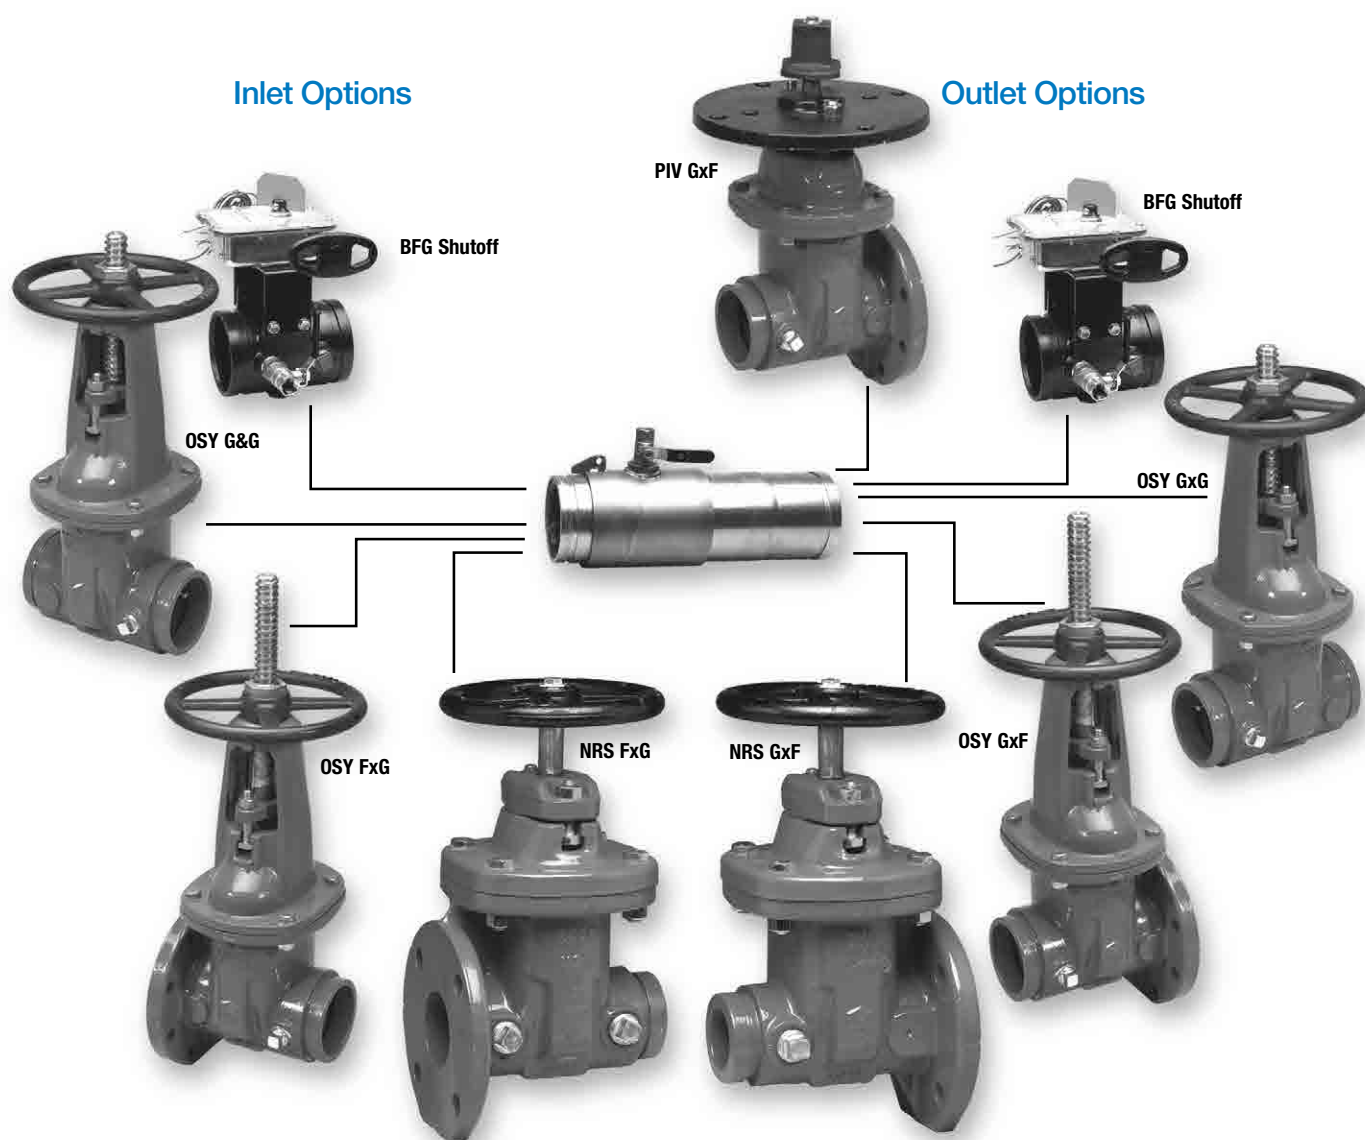














# Flow Charts

\*Typical maximum system flow rate (7.5 feet/sec.)

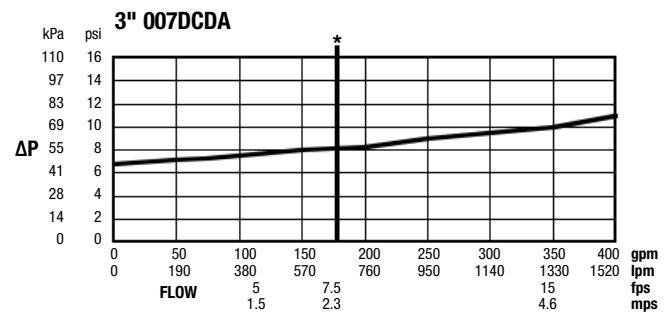
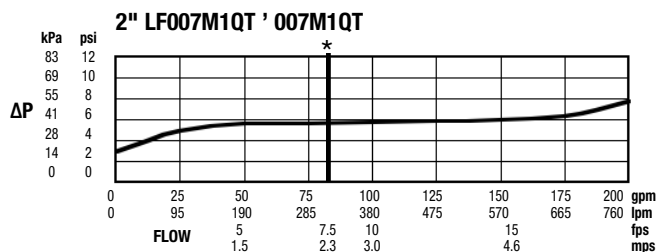
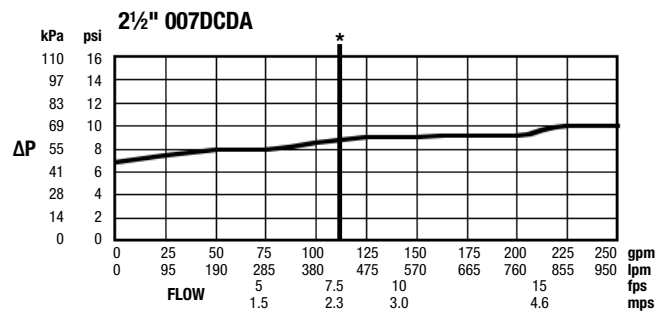
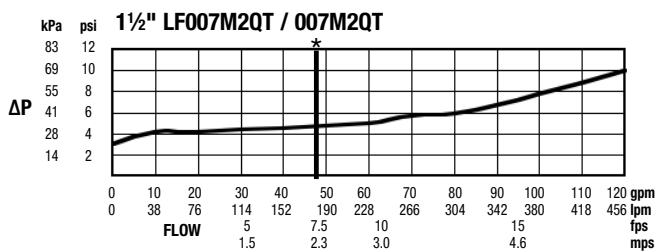
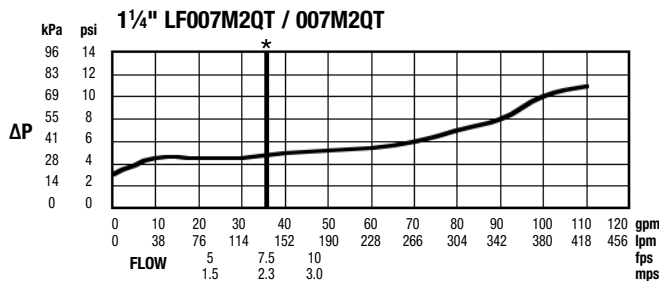
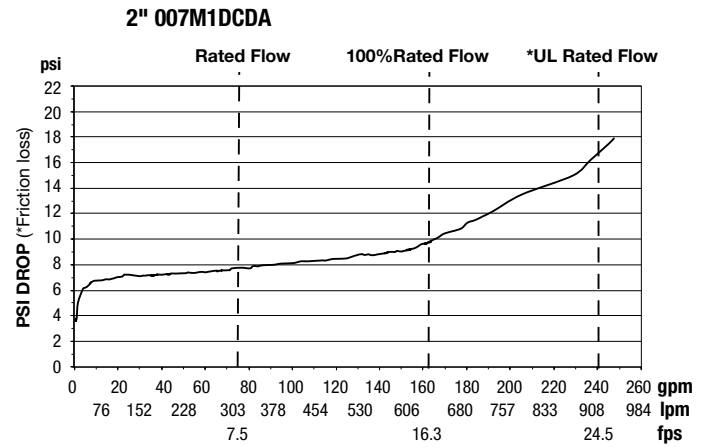
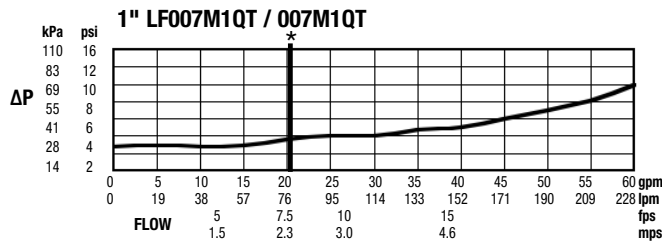
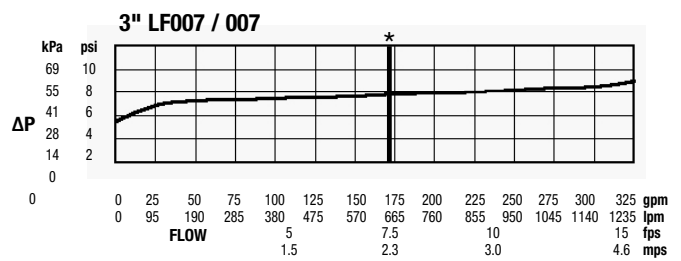
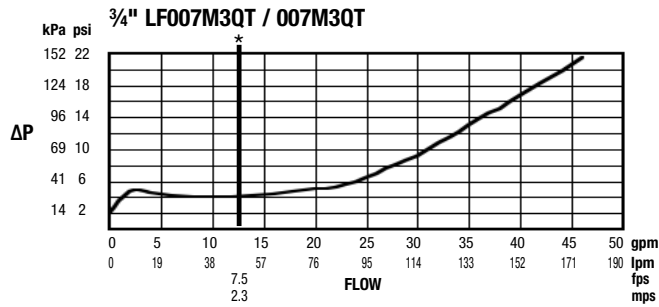
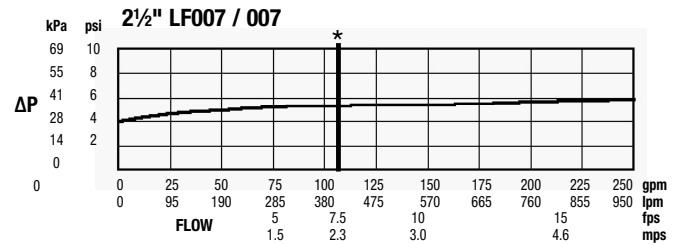
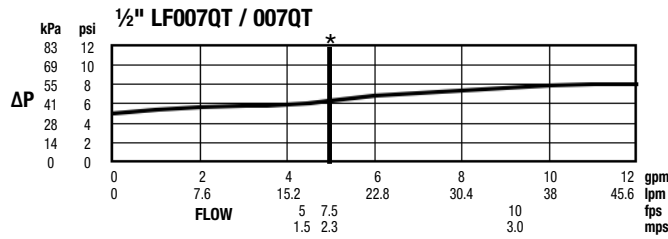


# Flow Charts \*Typical maximum system flow rate (7.5 feet/sec.)

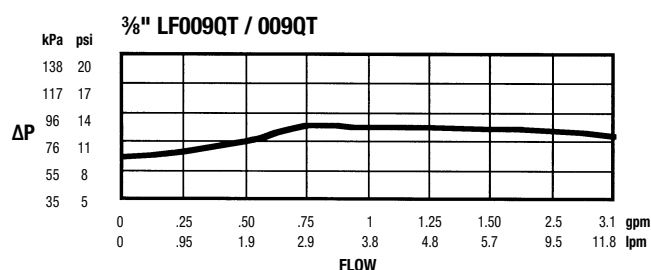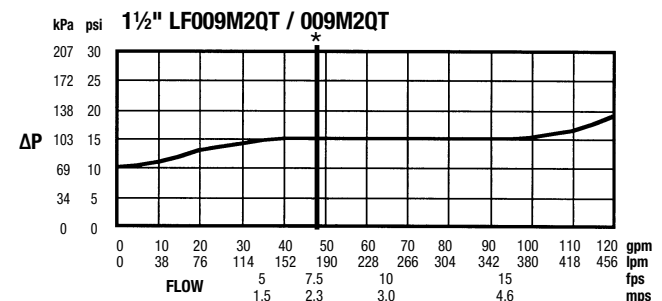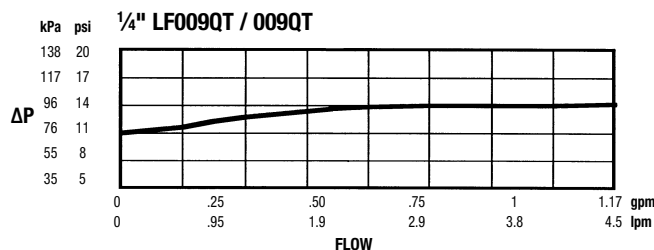
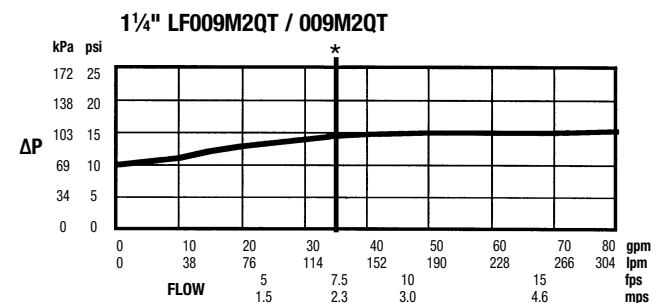
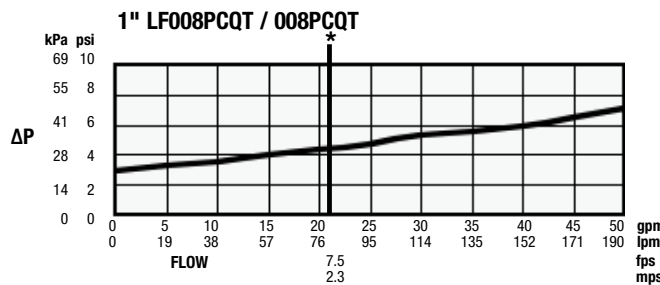
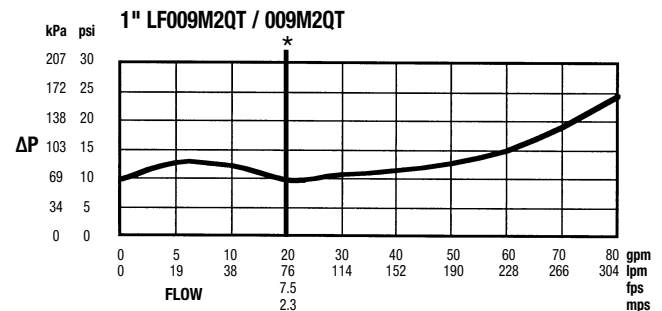
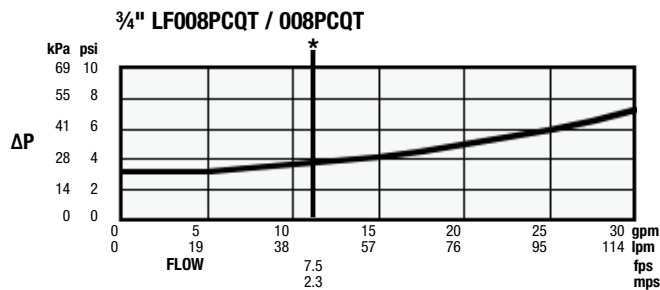
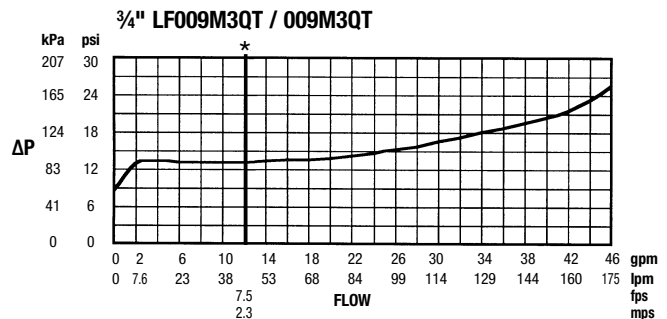
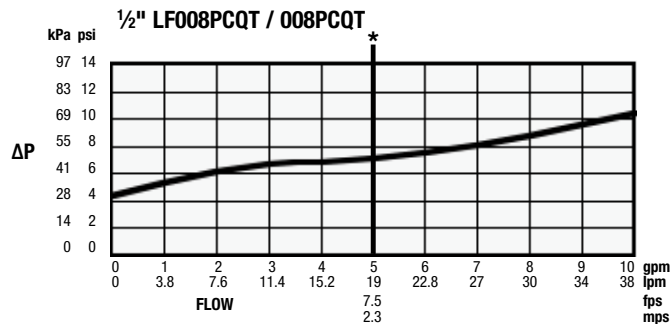
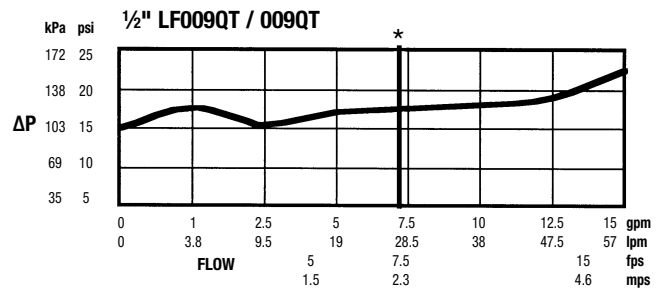
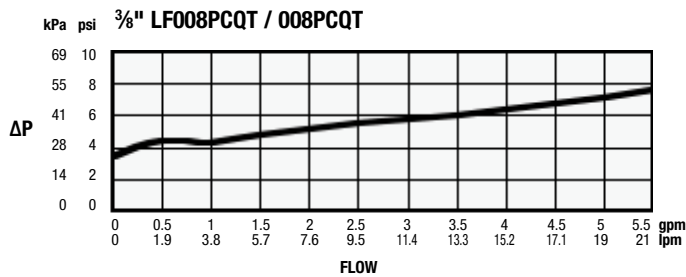


# Flow Charts

\*Typical maximum system flow rate (7.5 feet/sec.)


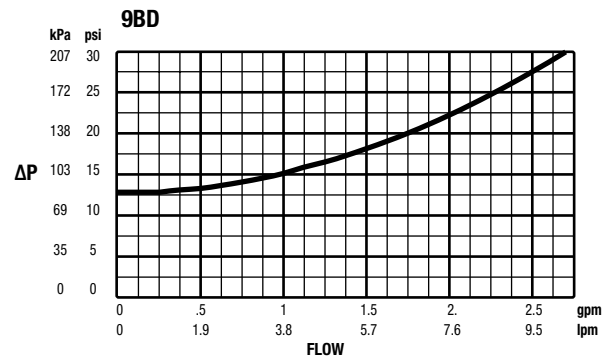
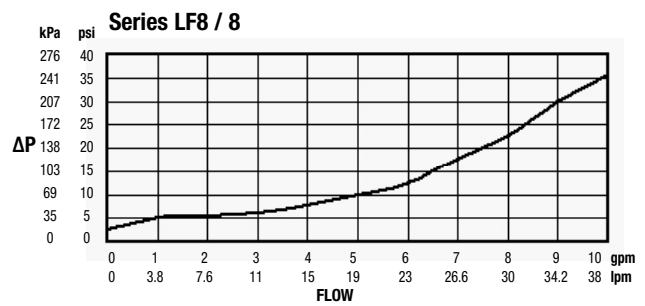
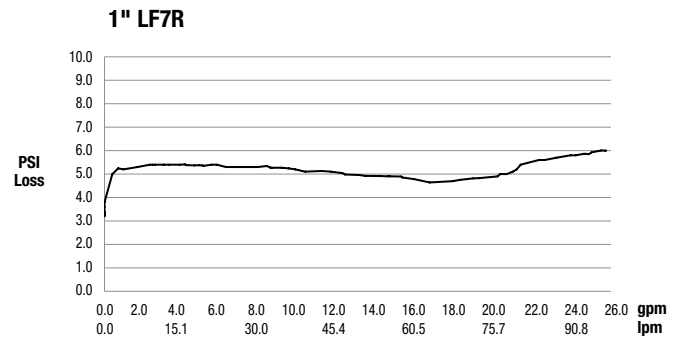
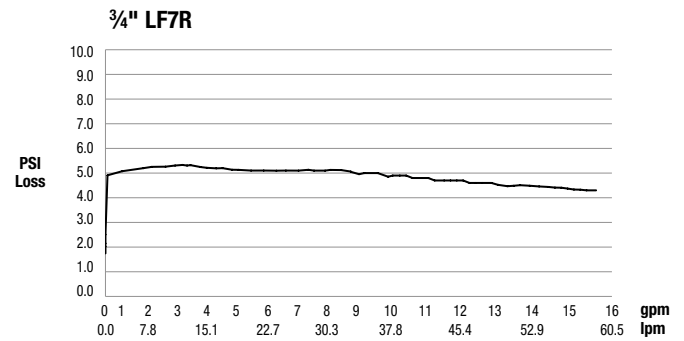
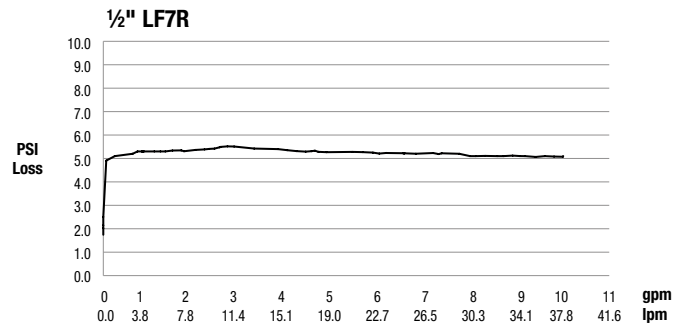
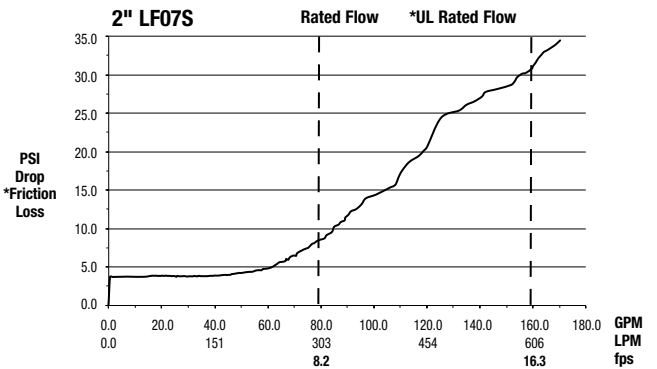
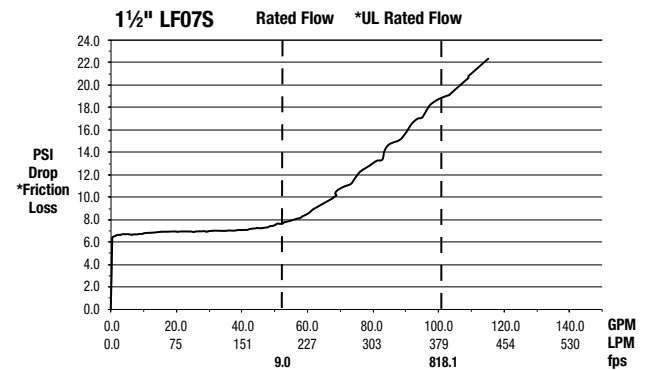
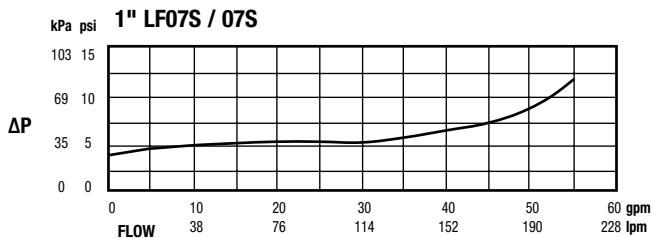
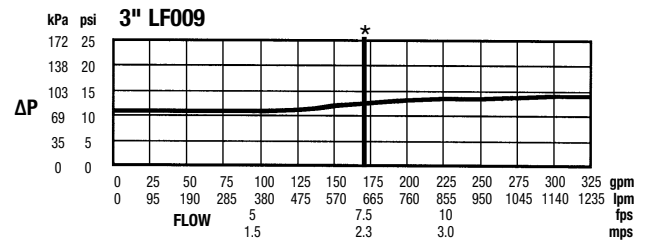
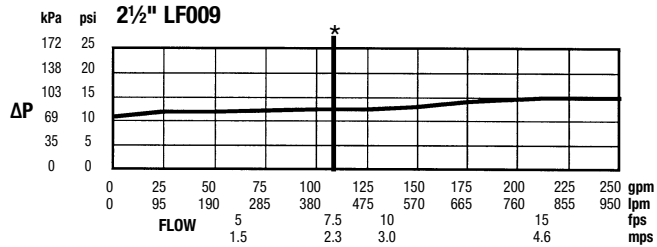
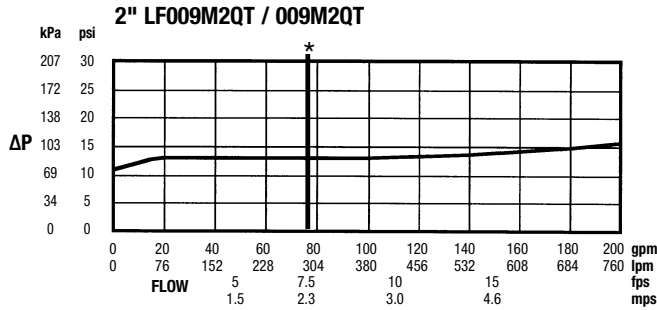


# Flow Charts \*Typical maximum system flow rate (7.5 feet/sec.)

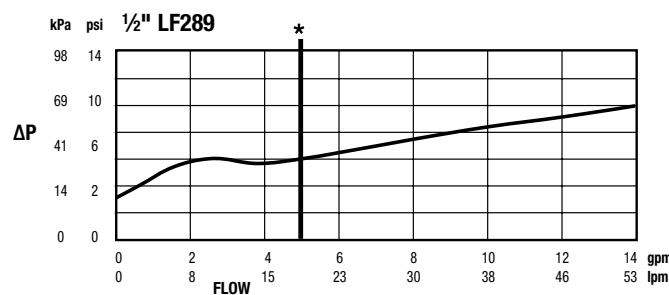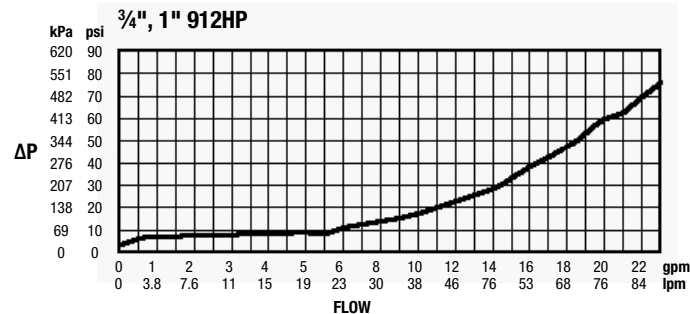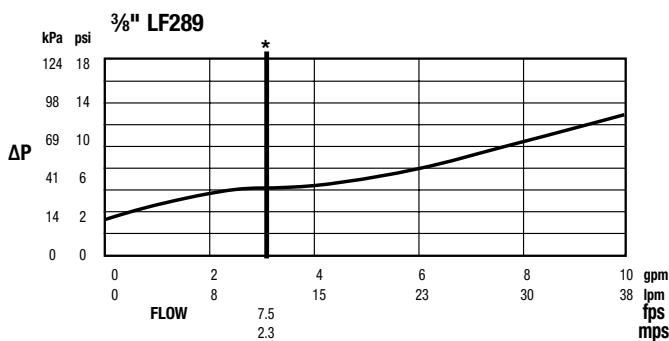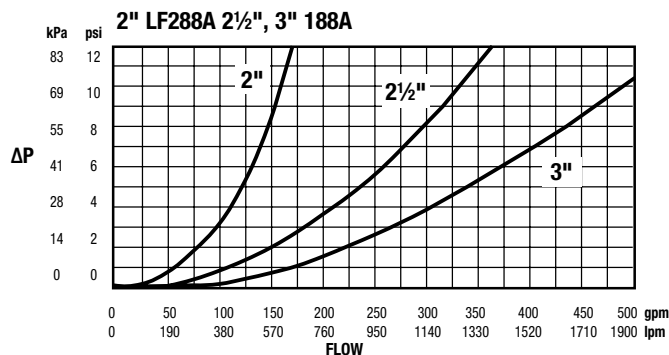
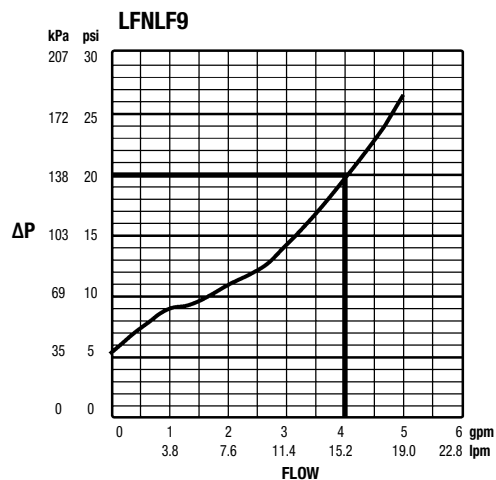
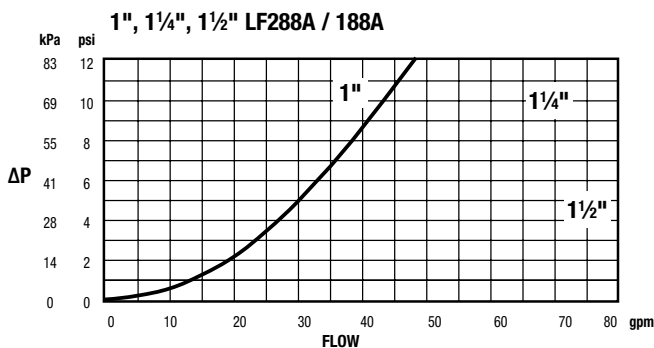
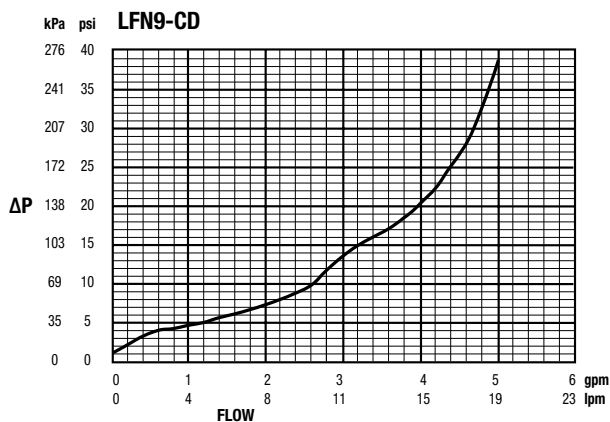
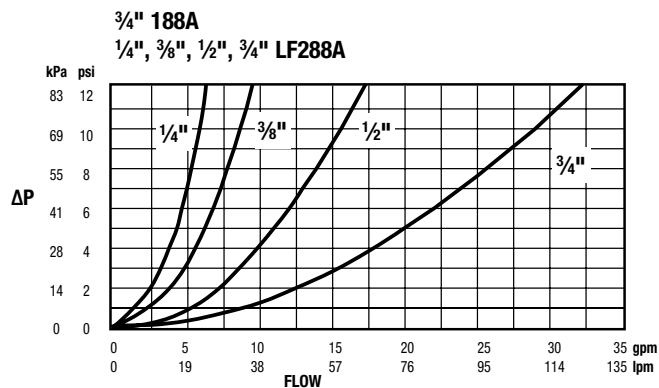
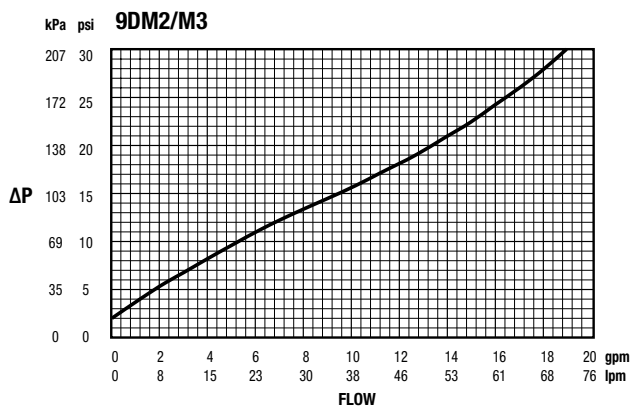


# Flow Charts

\*Typical maximum system flow rate (7.5 feet/sec.)

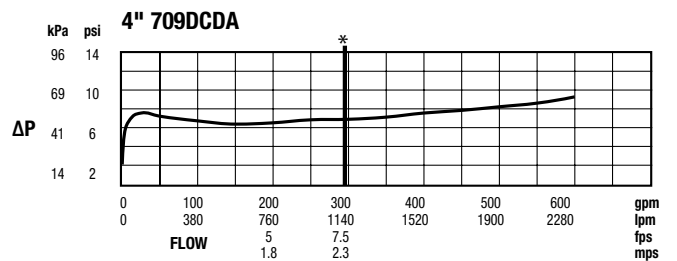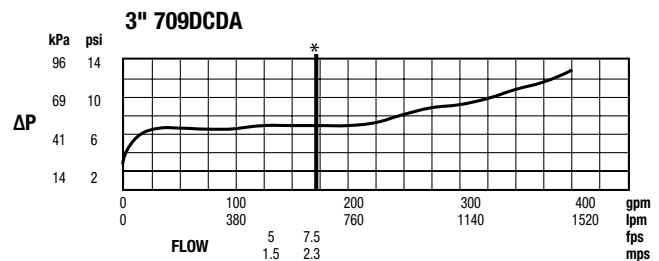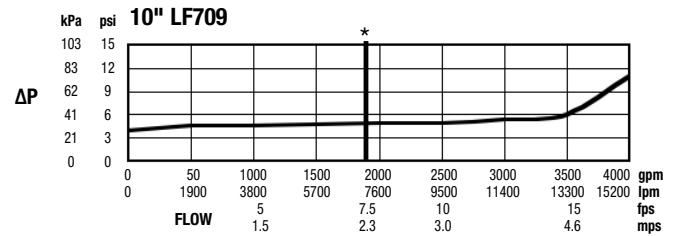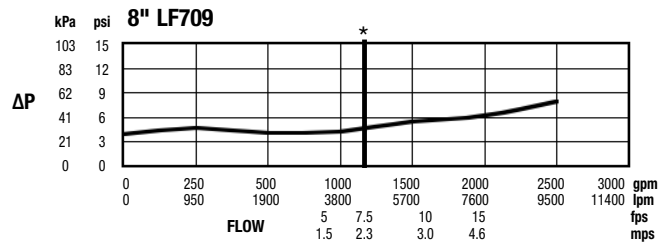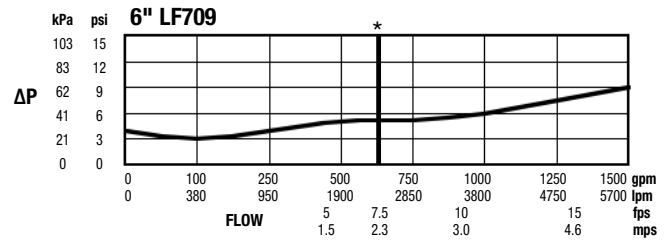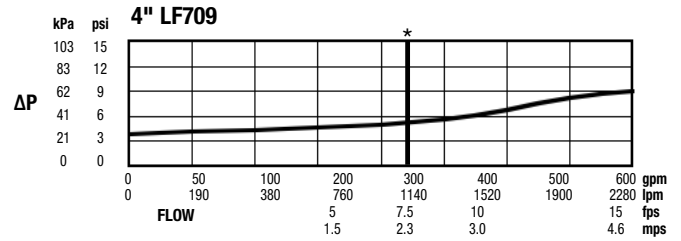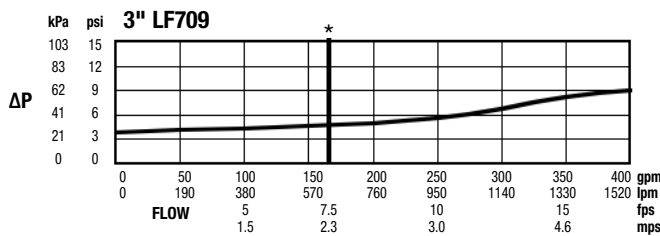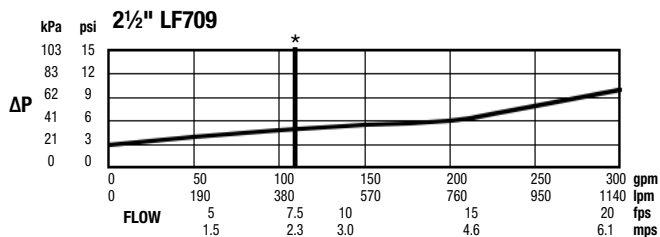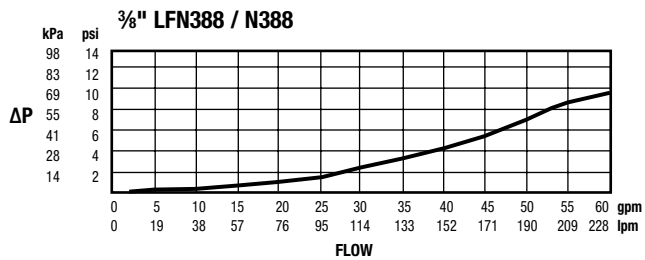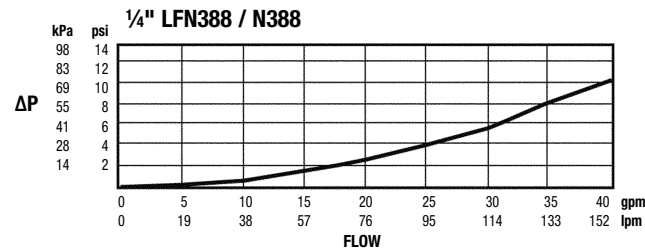
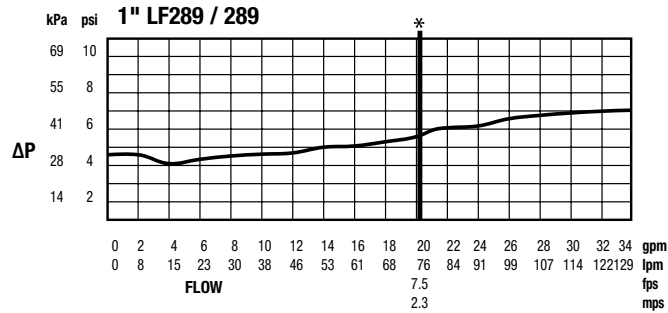
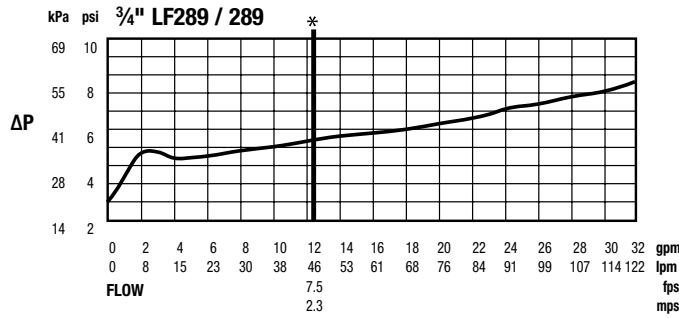


# Flow Charts \*Typical maximum system flow rate (7.5 feet/sec.)

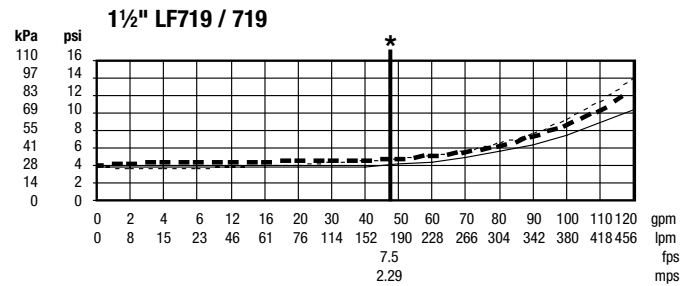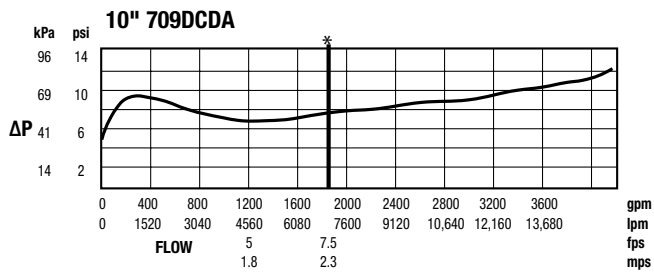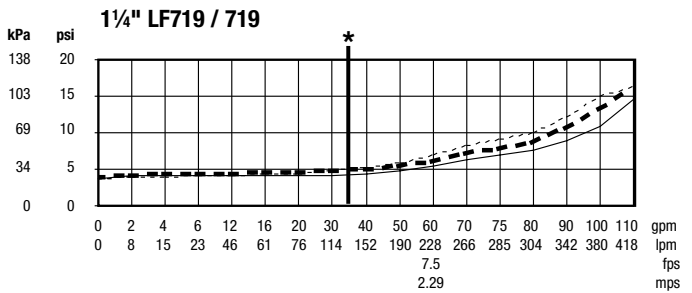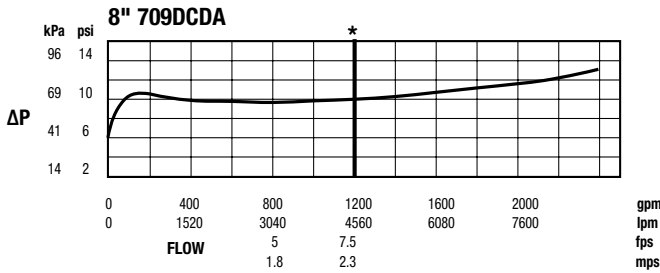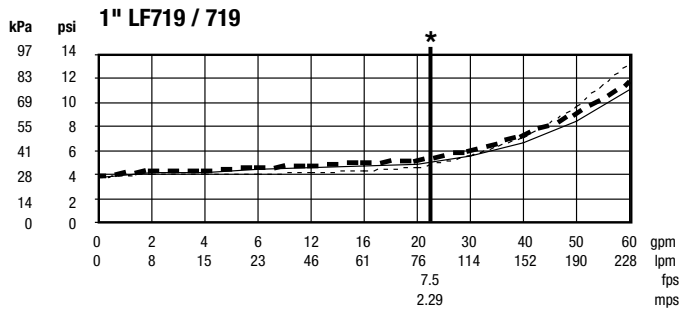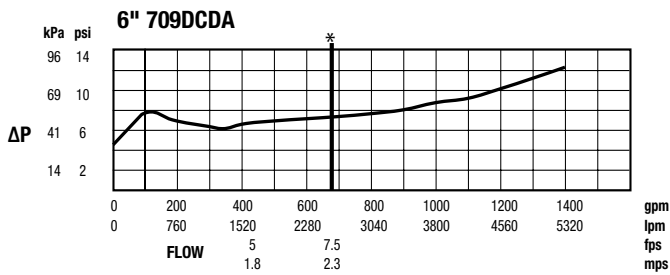

QT      AQT      UQT

—      - - -      - - -




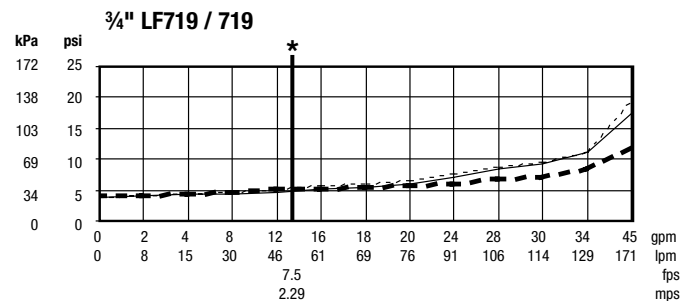
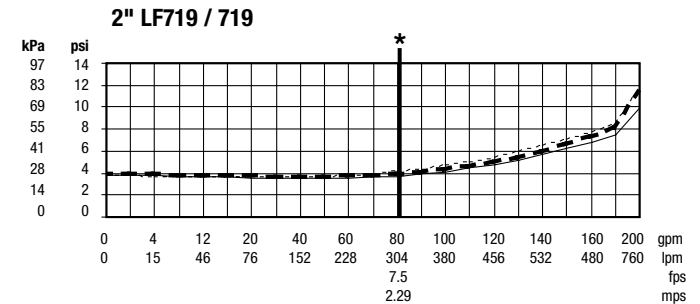
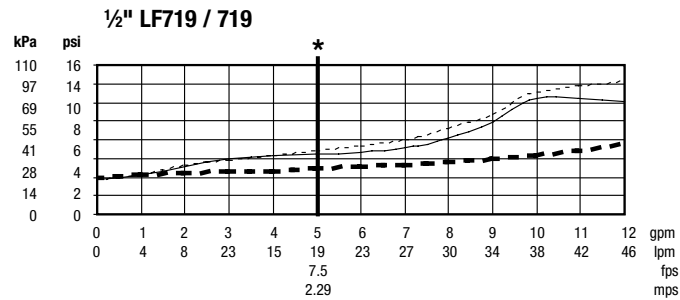


# Flow Charts

\*Typical maximum system flow rate (7.5 feet/sec.)







— H — V - - - - N

\* = Rated flow \*\* = UL Rated flow

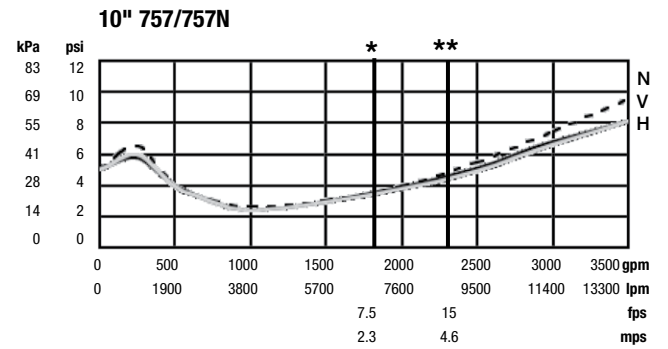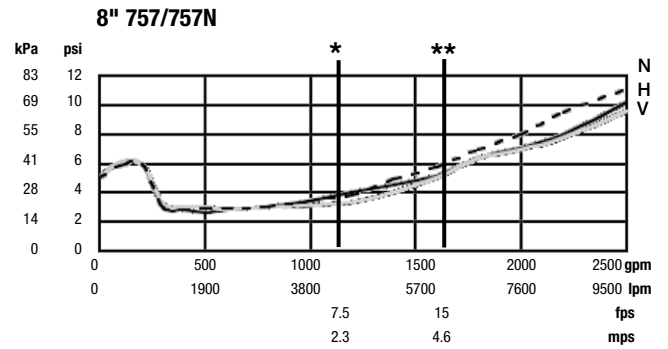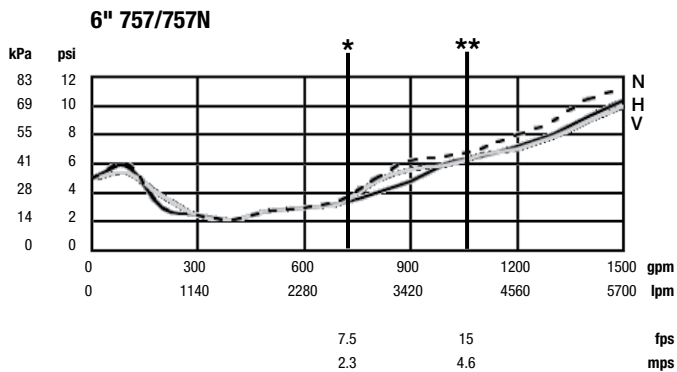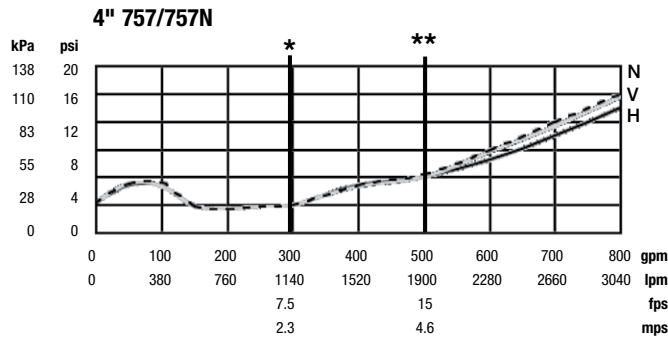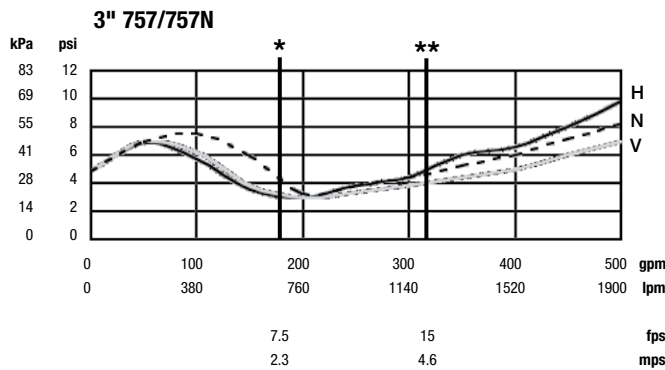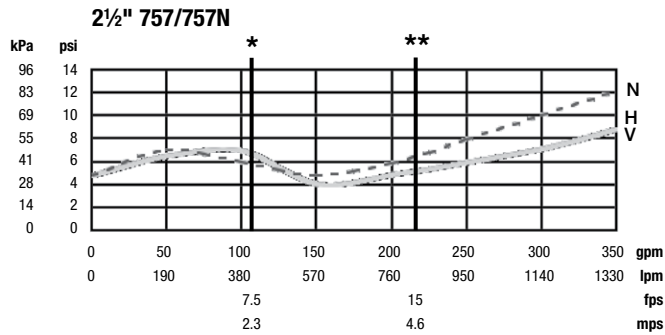








# Flow Charts \*Typical maximum system flow rate (7.5 feet/sec.)




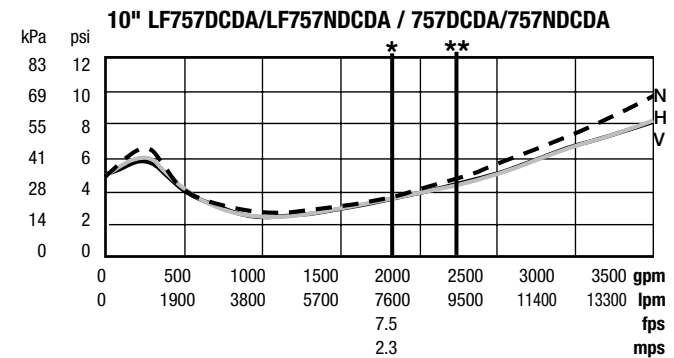
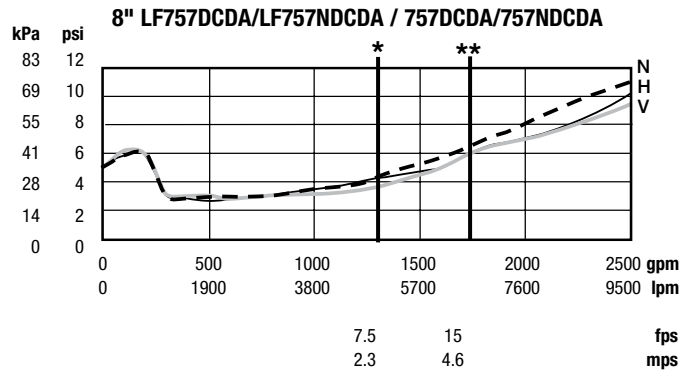
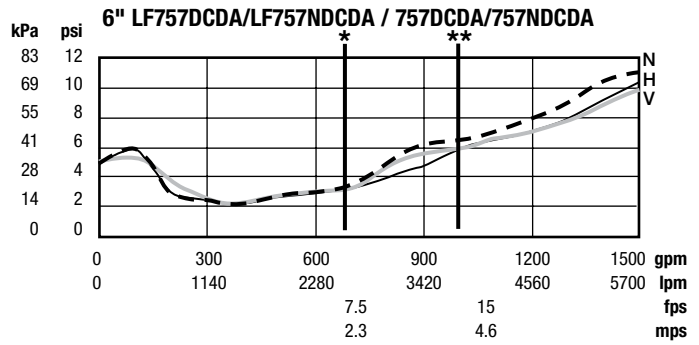
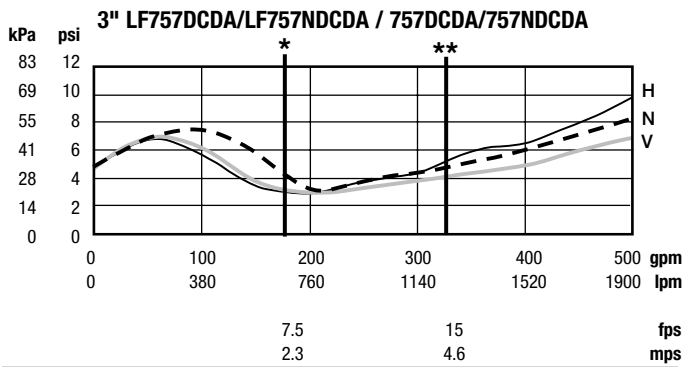
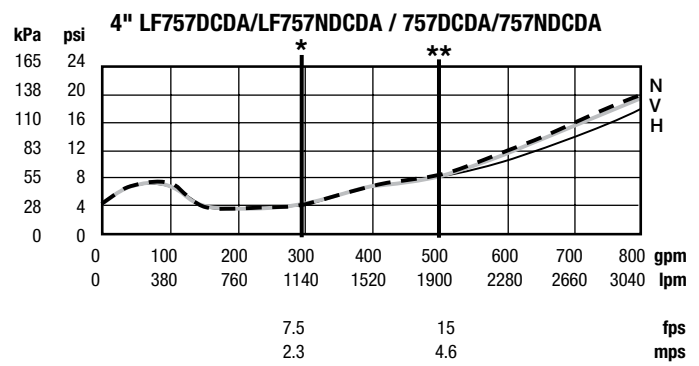
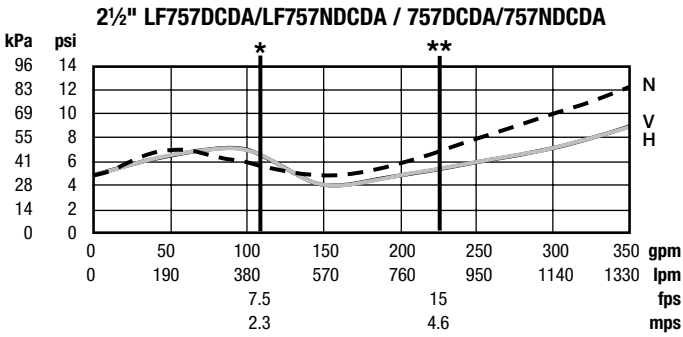


# Flow Charts

\*Typical maximum system flow rate (7.5 feet/sec.)

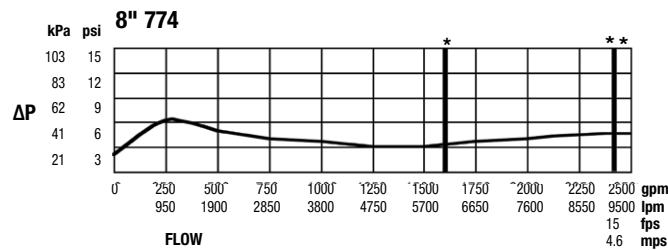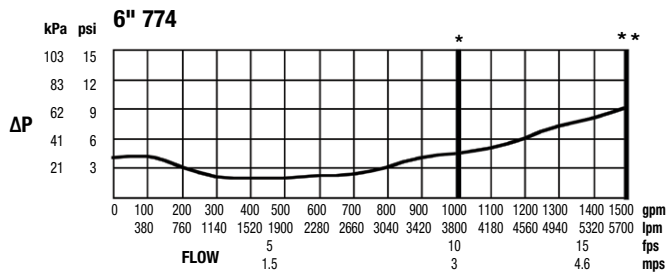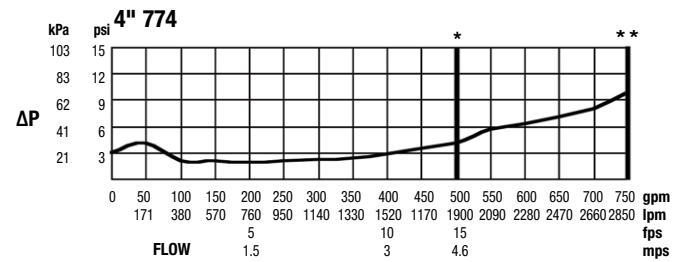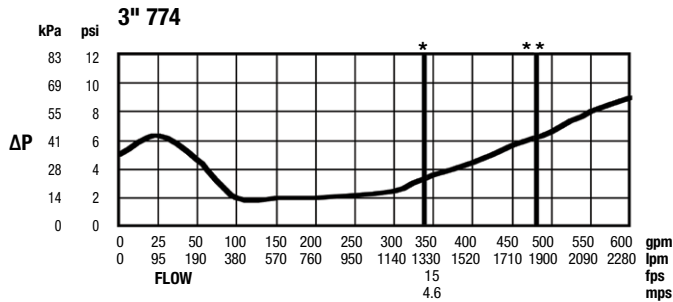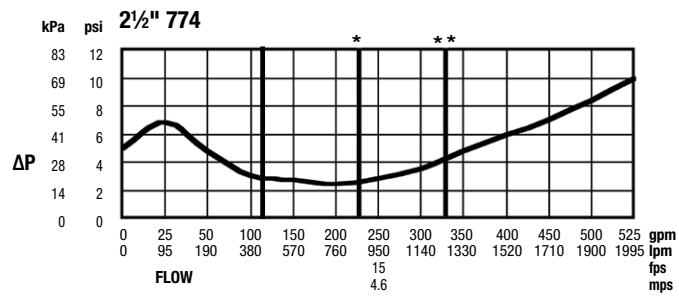


# Flow Charts \*Typical maximum system flow rate (7.5 feet/sec.)

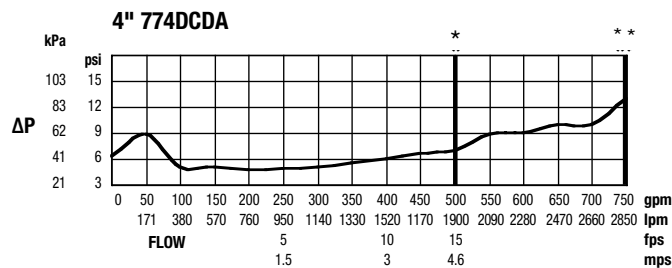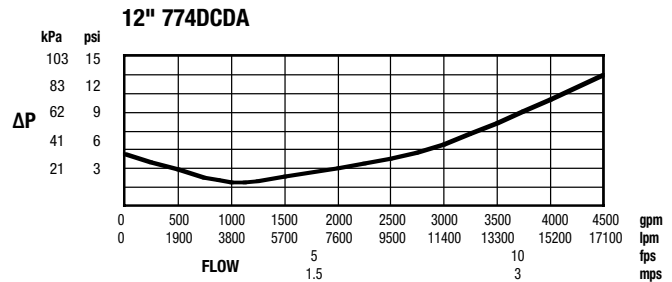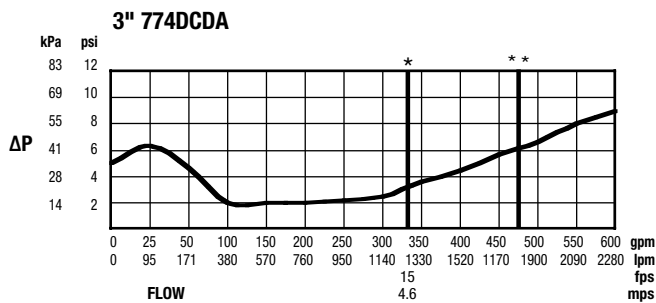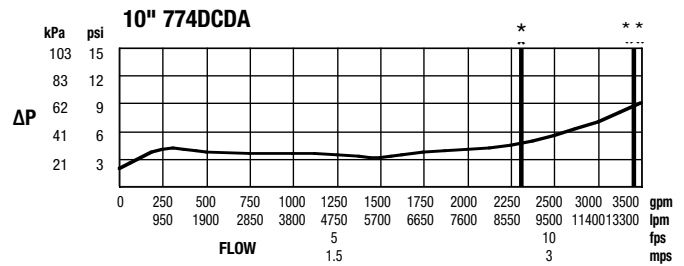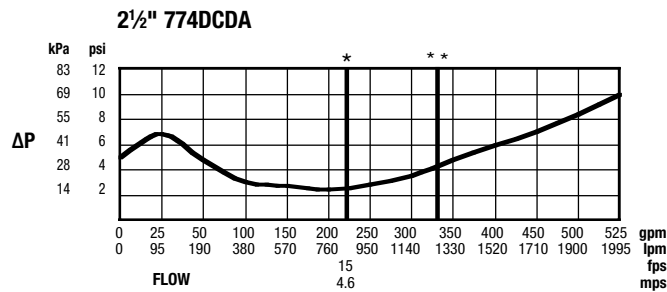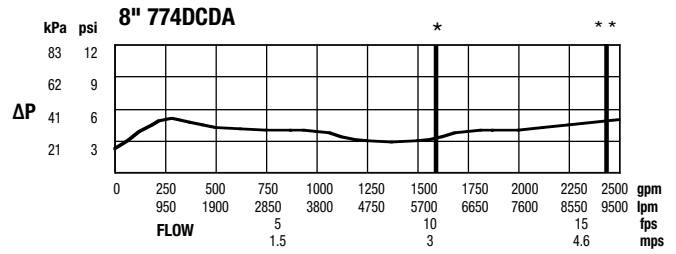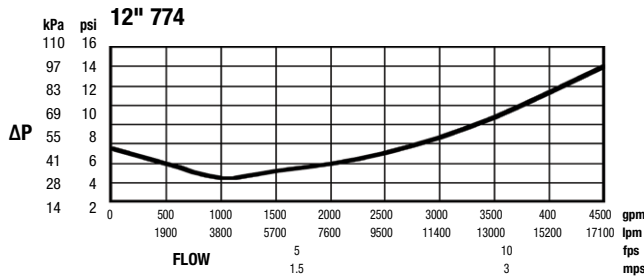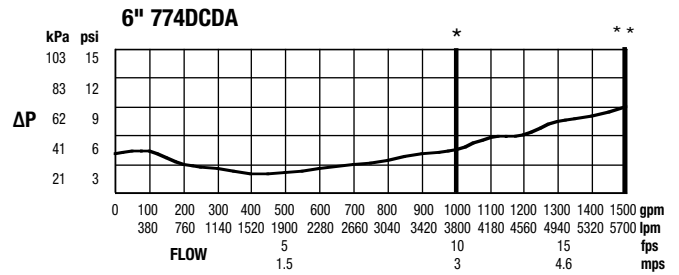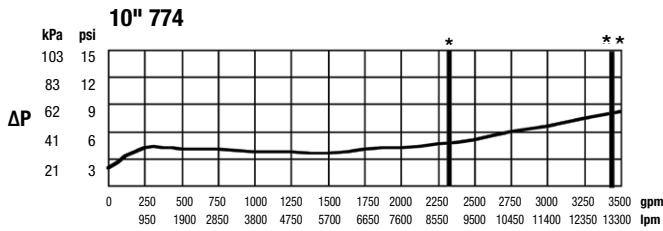


# Flow Charts

\*Typical maximum system flow rate (7.5 feet/sec.)


1/2" LF800M4FR, LF800M4QT / 800M4FR, 800M4QT

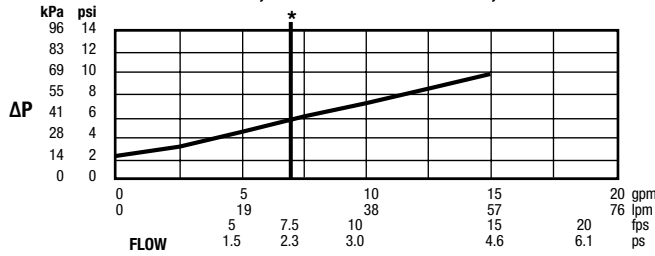


3/4" LF800M4FR, LF800M4QT / 800M4FR, 800M4QT

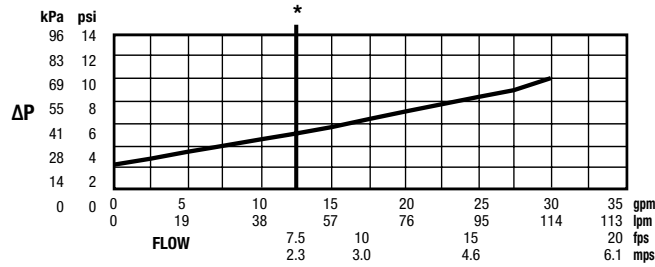


1" LF800M4FR, LF800M4QT / 800M4FR, 800M4QT

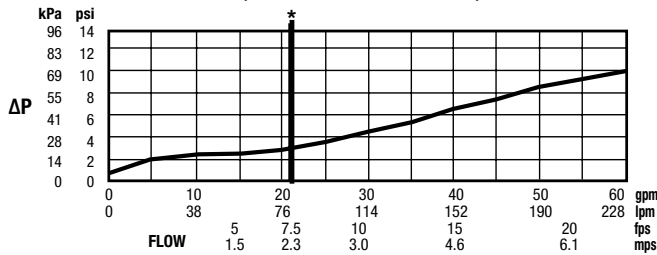


1 1/4" LF800M4FR, LF800M4QT / 800M4FR, 800M4QT

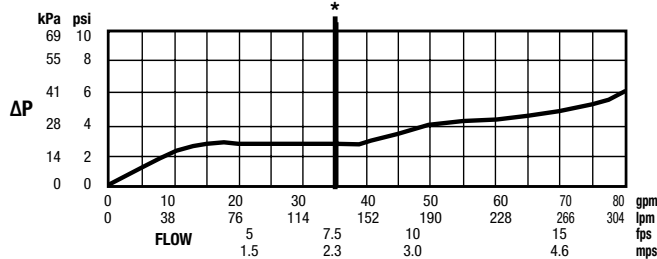


1 1/2" LF800M4FR, LF800M4QT / 800M4FR, 800M4QT

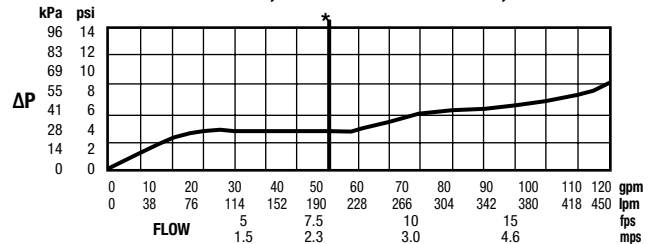


2" LF800M4FR, LF800M4QT / 800M4FR, 800M4QT

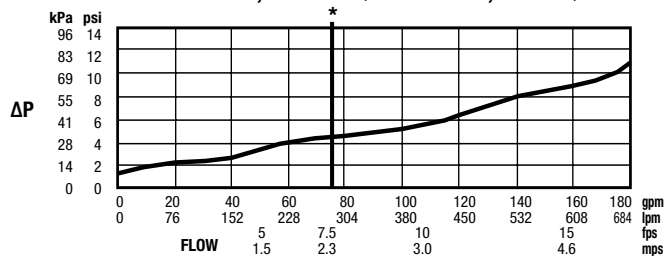


3/4" LF909QT

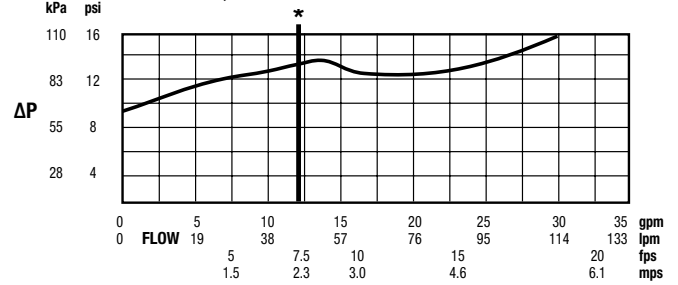


1" LF909QT

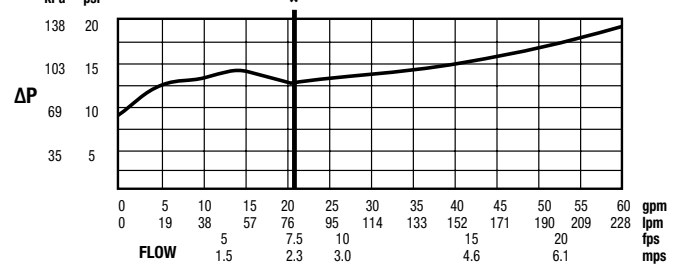


1 1/4" LF909M1QT

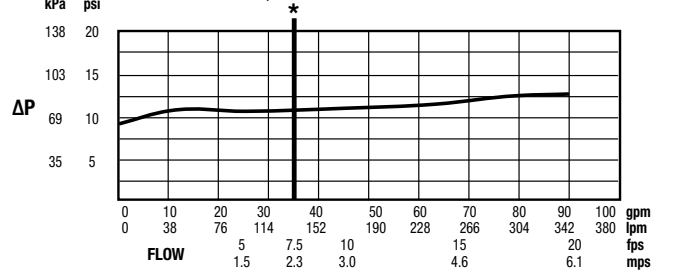













1 1/2" LF909M1QT

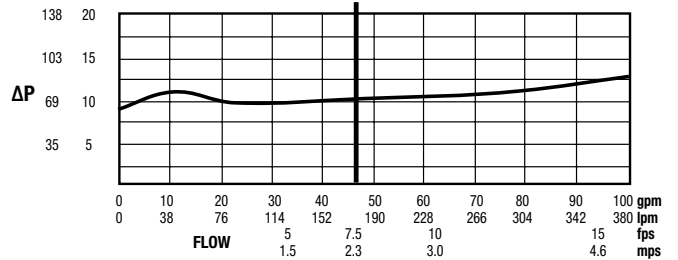

2" LF909M1QT

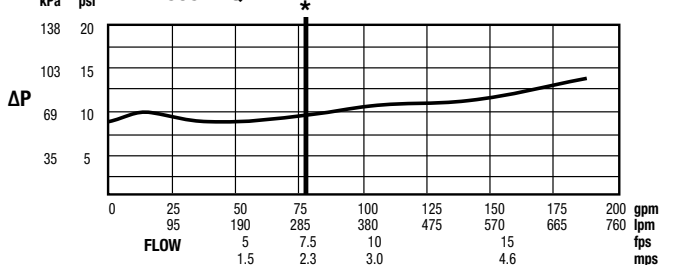

# Flow Charts \*Typical maximum system flow rate (7.5 feet/sec.)

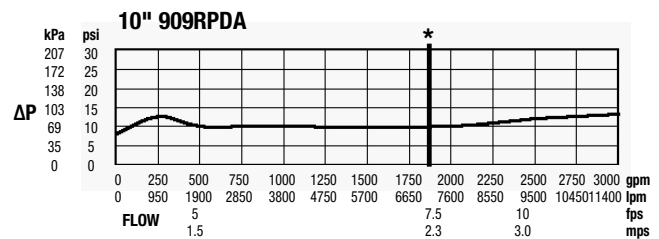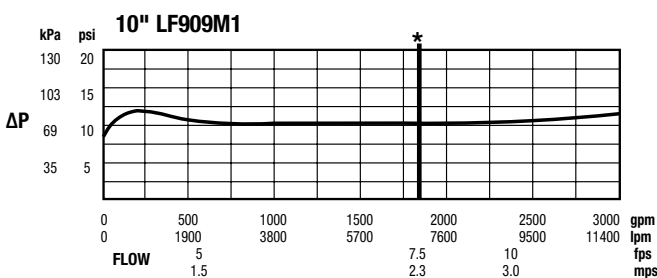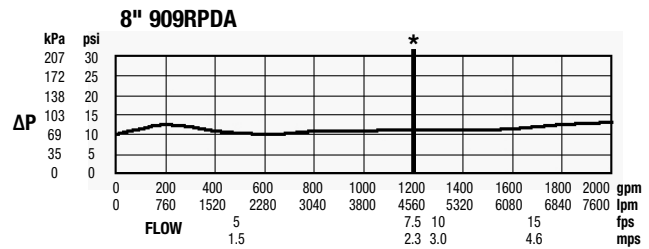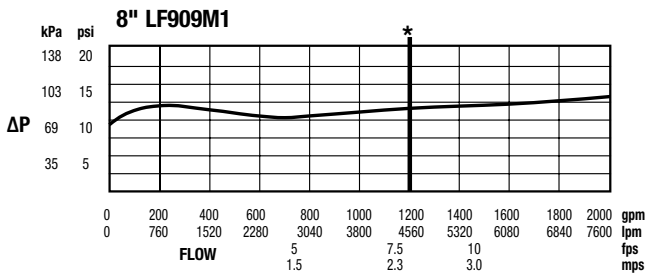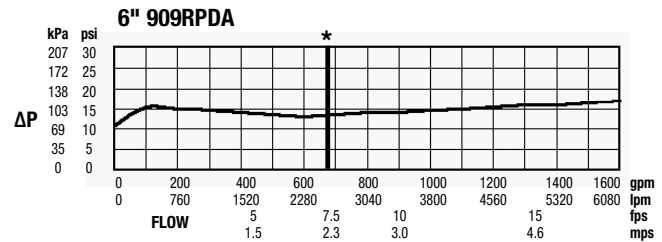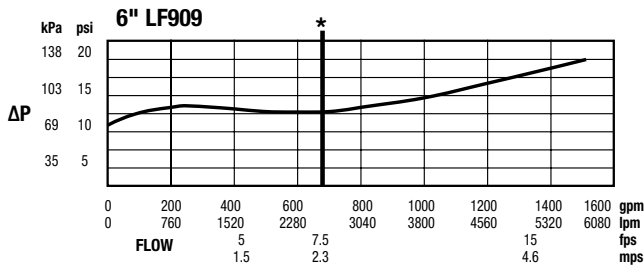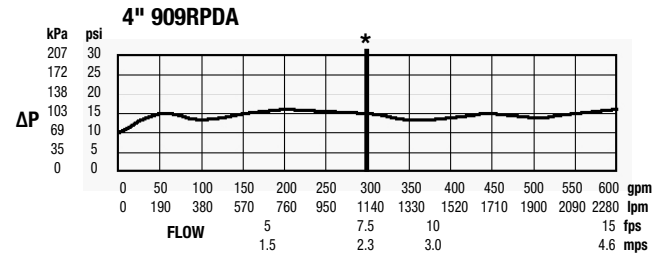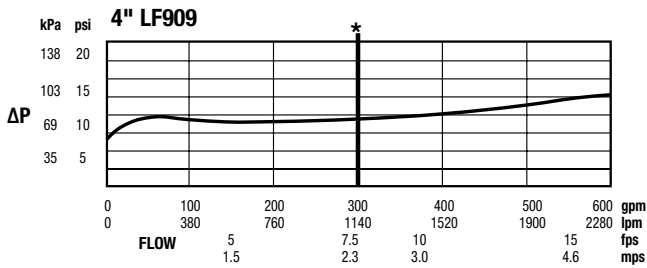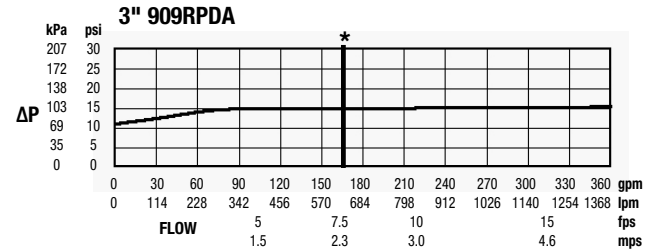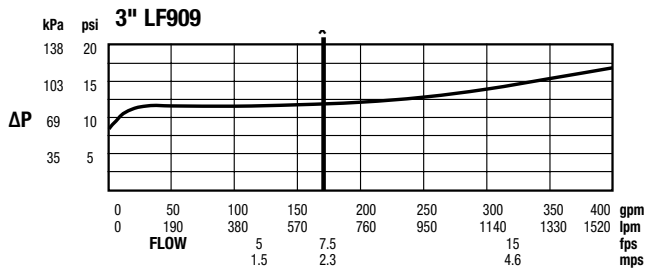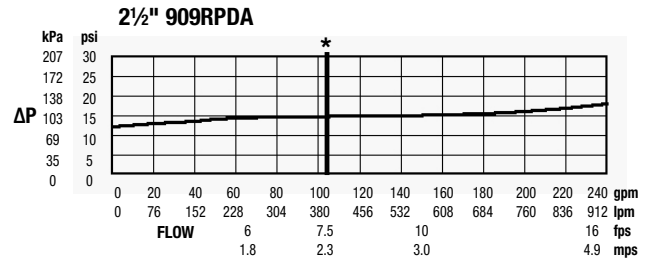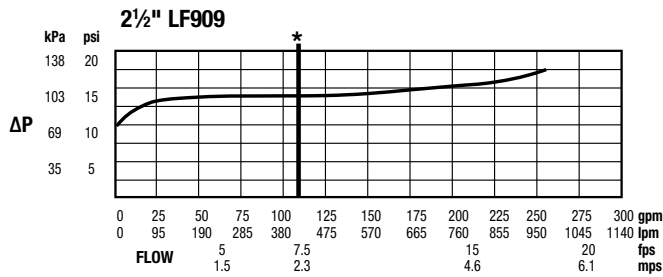










# Flow Charts

\*Typical maximum system flow rate (7.5 feet/sec.)

— LF919QT/919QT — U919QT - - - - 919AQT - - - 919ZQT









— H — V - - - - Z

\* = Rated flow \*\* = UL Rated flow

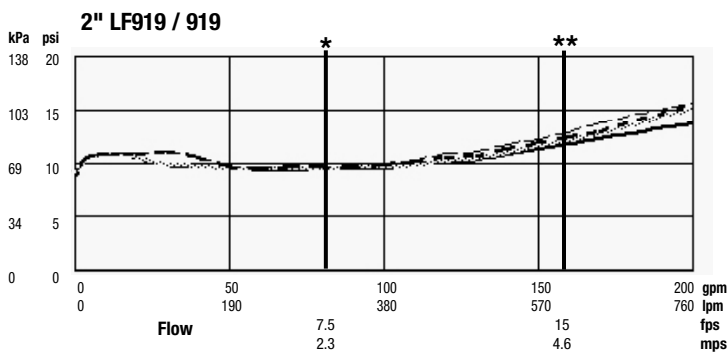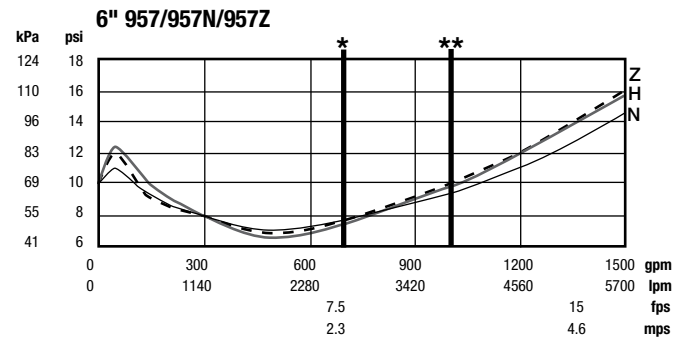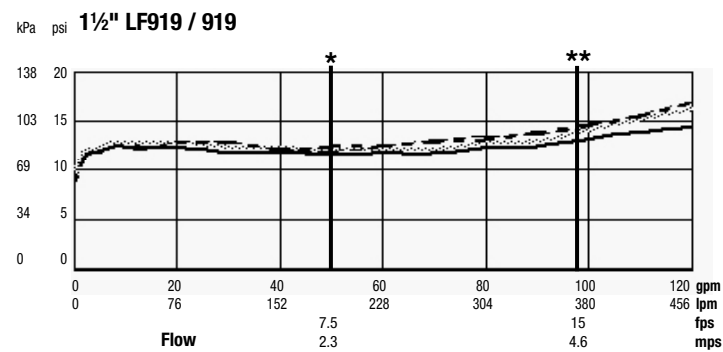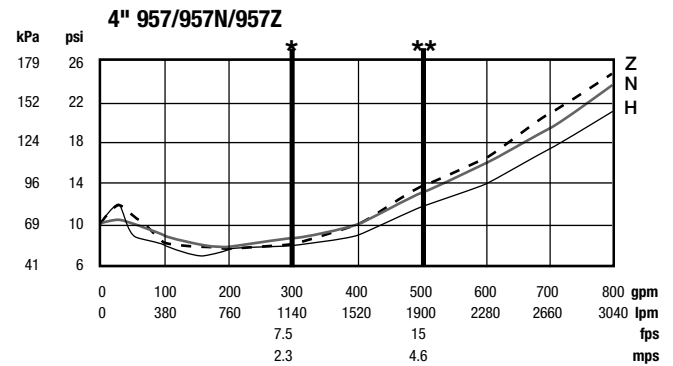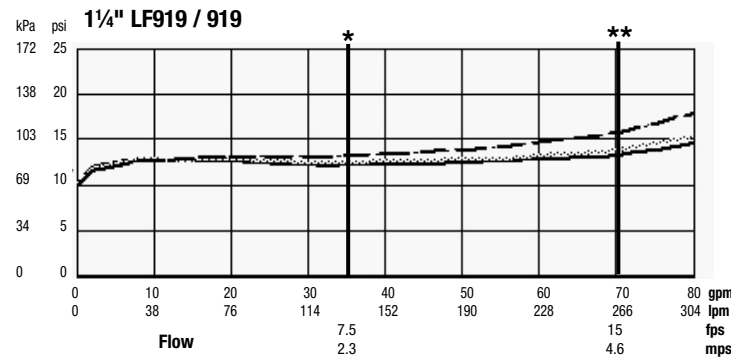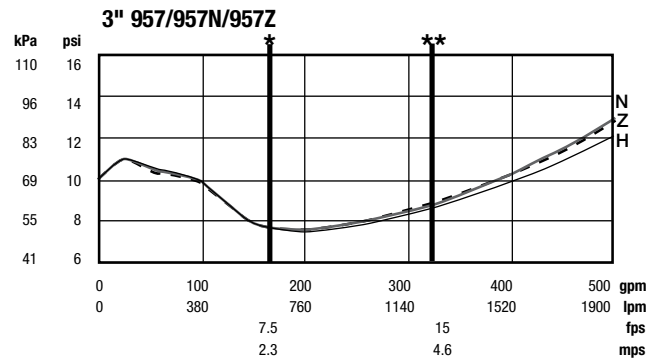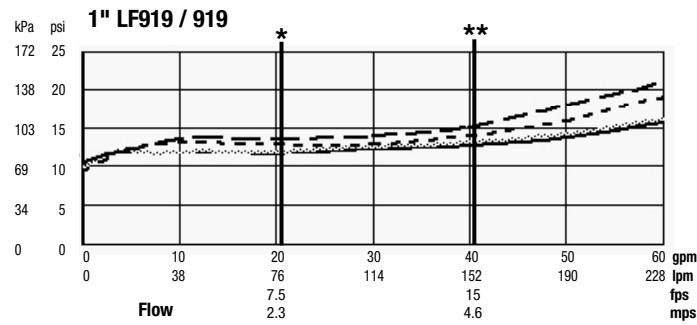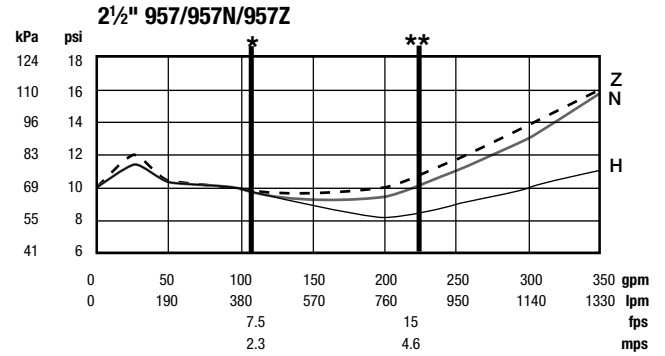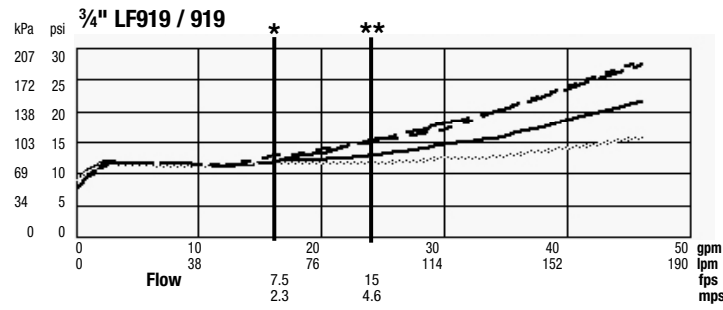

# Flow Charts












\*Typical maximum system flow rate (7.5 feet/sec.)

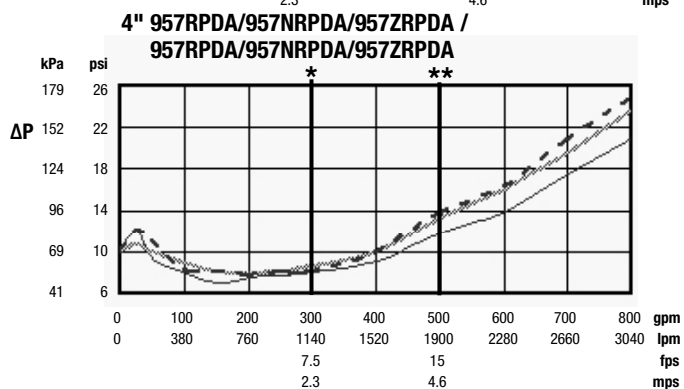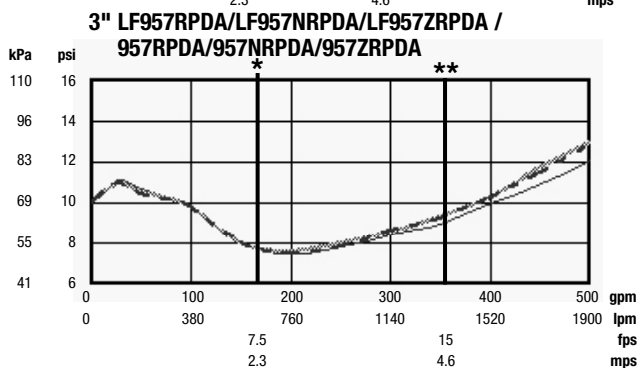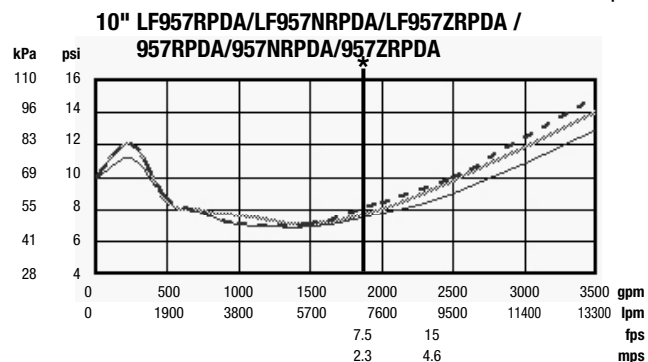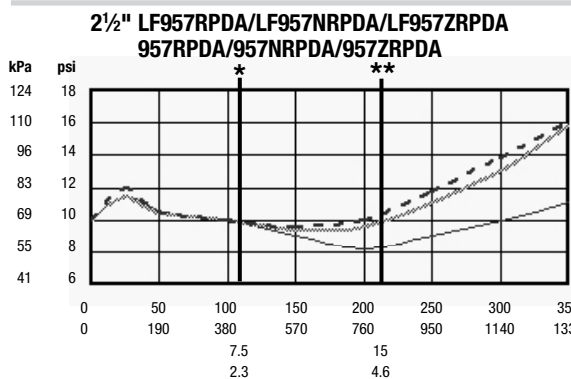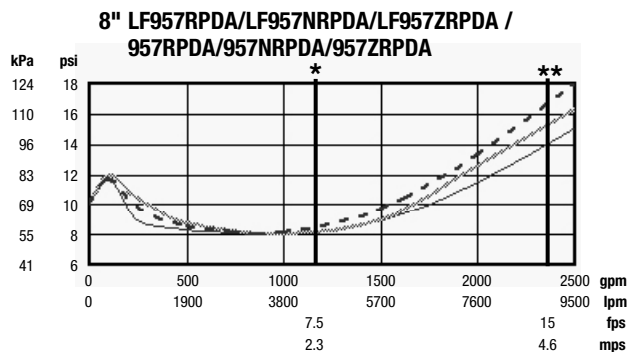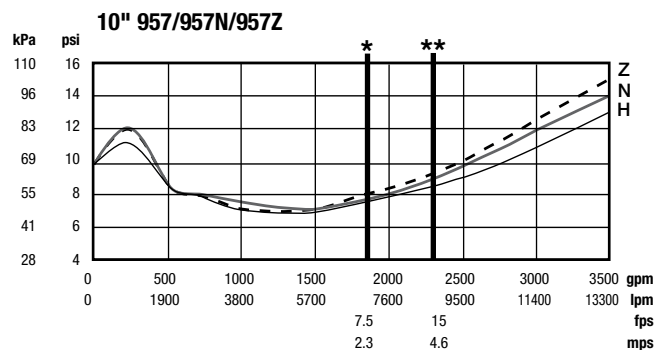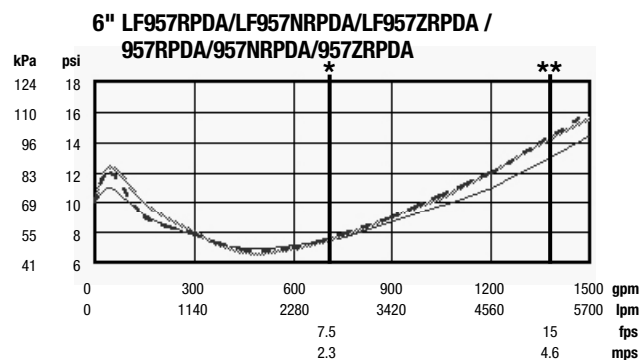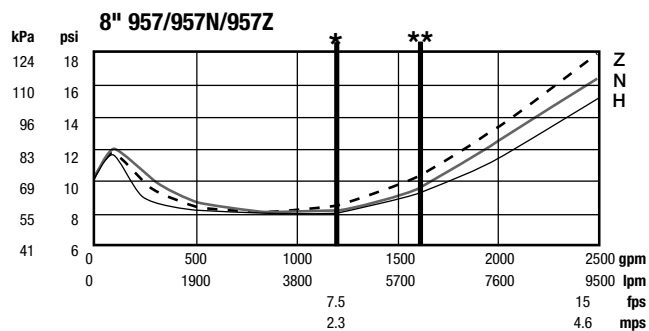









# Flow Charts

\*Typical maximum system flow rate (7.5 feet/sec.)

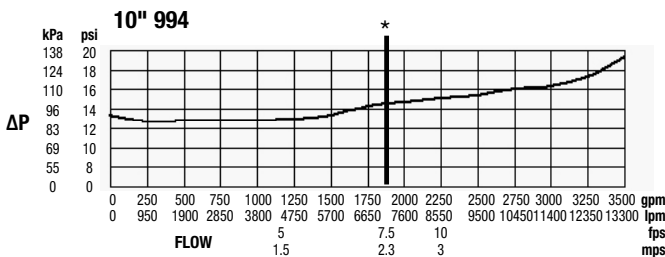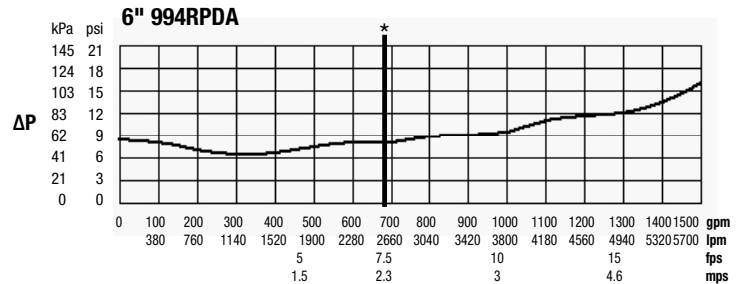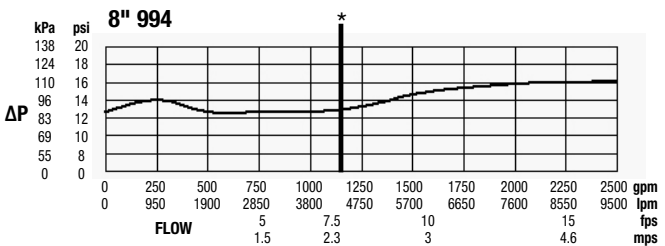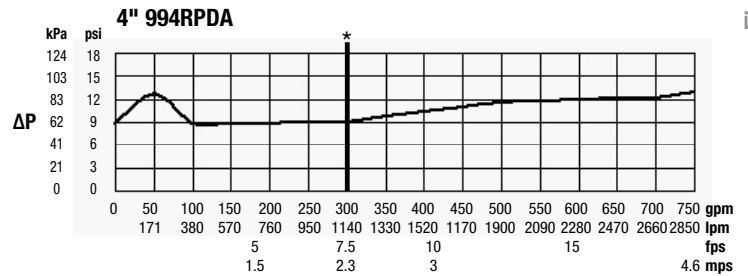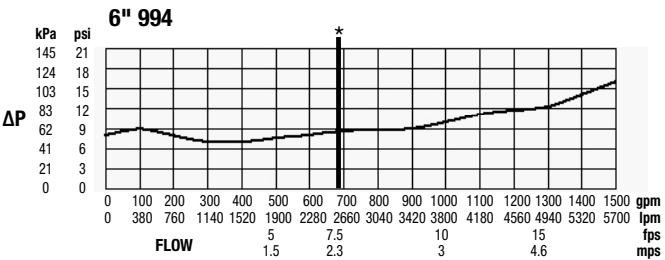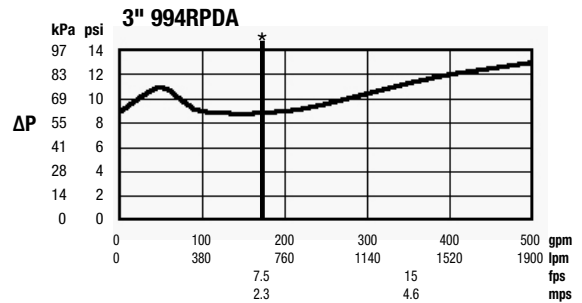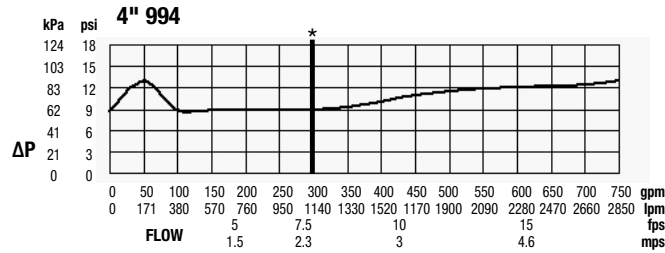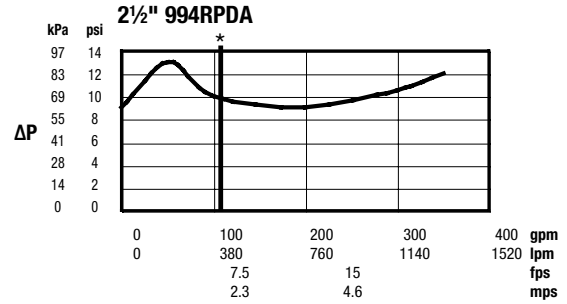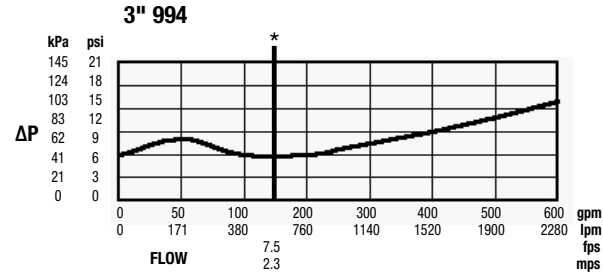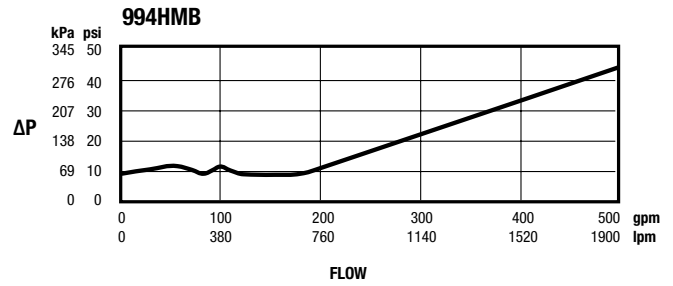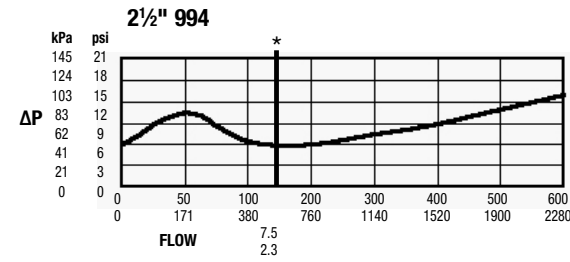

# Flow Charts \*Typical maximum system flow rate (7.5 feet/sec.)

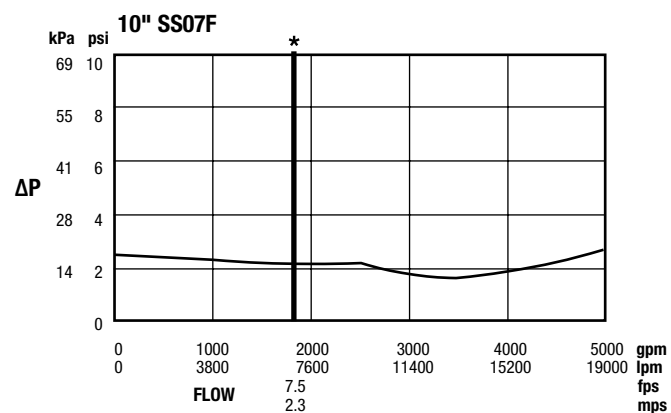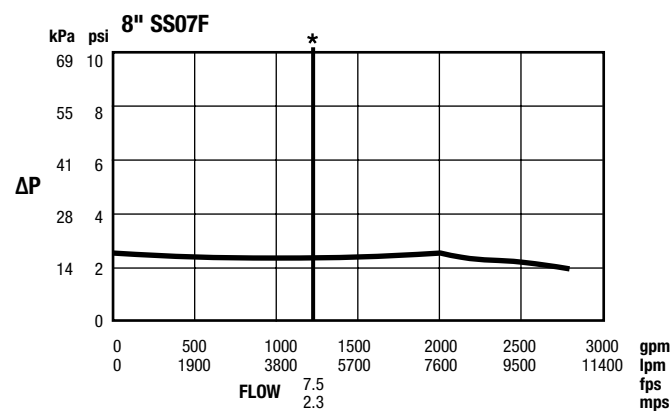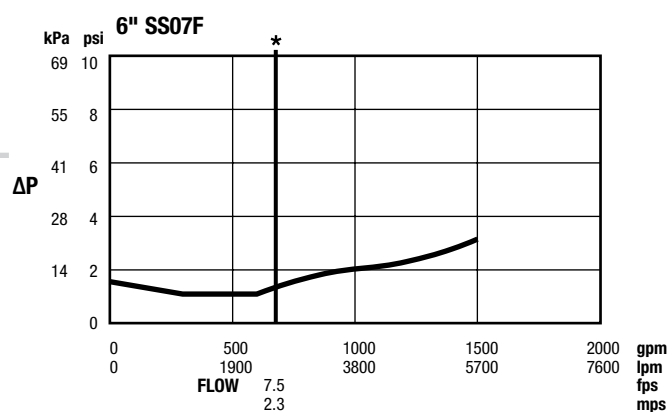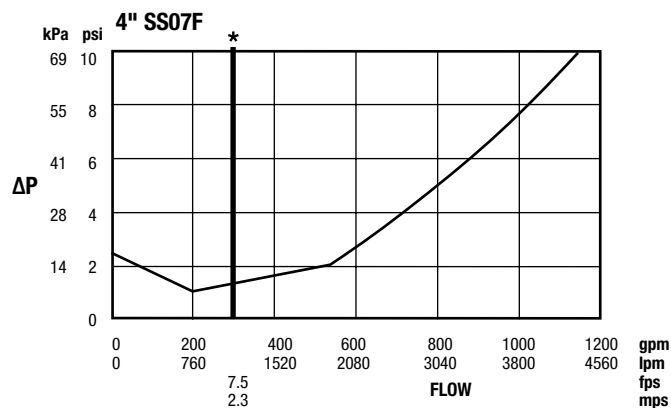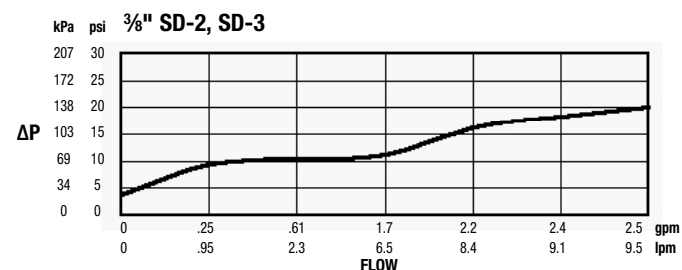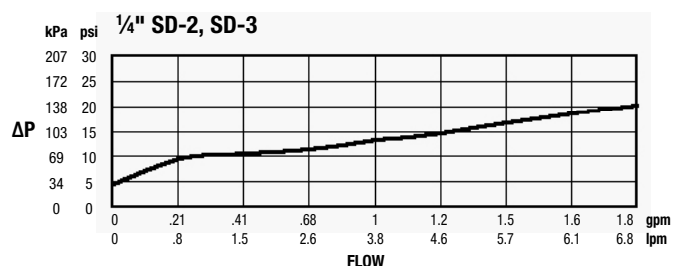

# Notes

**For Technical and Ordering Assistance, please call us at 978-688-1811.**

**To locate your nearest Watts representative, please click on our  
*find a sales rep* locator on [watts.com](http://watts.com).**

**Represented by:**



*A Watts Water Technologies Company*



**USA:** Tel. (978) 688-1811 • Fax: (978) 794-1848 • [www.watts.com](http://www.watts.com)  
**Canada:** Tel. (905) 332-4090 • Fax: (905) 332-7068 • [www.watts.ca](http://www.watts.ca)